

CONTOUR INTERVAL = 4 MILLISIEMENS PER METER

LEGEND



15-25' EMBANKMENT—PREVALENT METAL DEBRIS, LIMESTONE BOULDERS, LARGE AND SMALL METAL PLATES, CONES, STRIPS, FRAGMENTS OF CLAY PIPE, WIRE, AND METAL CABLE



• STAKED GEOPHYSICAL GRID POINT



STANDING WATER

LIMESTONE OUTCROP

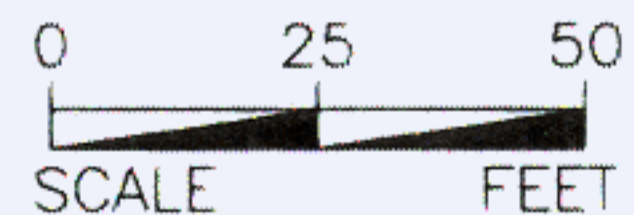


FIGURE 5.2
EM CONDUCTIVITY DATA (N-S)
SWMU B-12
CSSA HIGH PRIORITY SWMUs

S-3

October 1995