


CONTOUR INTERVAL = 2 PARTS PER THOUSAND

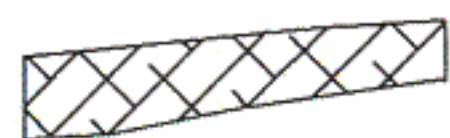

15-25' EMBANKMENT—PREVALENT METAL DEBRIS, LIMESTONE BOULDERS, LARGE AND SMALL METAL PLATES, CONES, STRIPS, FRAGMENTS OF CLAY PIPE, WIRE, AND METAL CABLE

LEGEND

• STAKED GEOPHYSICAL GRID POINT



LIMESTONE OUTCROP



STANDING WATER

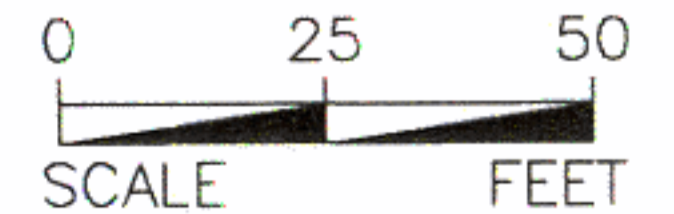


FIGURE 5.5
EM IN-PHASE DATA (E-W)
SWMU B-12

CSSA HIGH PRIORITY SWMUs

5-6

October 1995