JUNE 2020

On-Post Quarterly Groundwater Monitoring Report



Prepared For

Department of the Army Camp Stanley Storage Activity Boerne, Texas

July 2020

EXECUTIVE SUMMARY

- Groundwater samples were collected from 4 on-post drinking water wells scheduled for sampling at Camp Stanley Storage Activity (CSSA) in June 2020. Two additional monitoring wells (CS-2 and CS-3) were sampled to determine if CS-3 is a viable replacement for damaged well CS-4.
- CSSA experienced slightly below average rainfall during the second quarter of 2020 but the aquifer experienced an increase from March 2020 to June 2020. The CSSA weather station (WS) at AOC-65 recorded 8.23 inches of rainfall from April to June and the B-3 WS recorded 11.09 inches during the same timeframe. The average rainfall for the Boerne area from April to June is 11.37 inches.
- At CSSA, the Middle Trinity aquifers' average groundwater elevation in June 2020 increased 37.37 feet from the elevations measured in March 2020. The average depth to water in the wells was 211.82 feet below top of casing (BTOC) or 1031.16 feet above mean sea level (MSL). As such, the Trinity-Glen Rose Groundwater Conservation District (TGRGCD) remained in 'year-round' conservation measures. For the adjacent Edwards aquifer, the San Antonio Water System (SAWS) has also remained in 'year-round' water restrictions implemented October 2, 2018.
- The maximum contaminant level (MCL) for VOCs was not exceeded in any wells sampled in June 2020.
- No wells sampled had metal detections above their corresponding MCL, action level (AL), or secondary standard (SS) in June 2020.
- No Westbay Well zones were scheduled for sampling in June 2020. However, these wells were profiled to capture water level data for the area.
- All samples collected in June 2020 were in accordance with the 2015 long term monitoring optimization (LTMO) report that has been approved by the TCEQ and USEPA.

GEOSCIENTIST CERTIFICATION

JUNE 2020 ON-POST QUARTERLY GROUNDWATER MONITORING REPORT

FOR

DEPARTMENT OF THE ARMY CAMP STANLEY STORAGE ACTIVITY BOERNE, TEXAS

I, Adrien Lindley, Professional Geologist (P.G.), hereby certify that the June 2020 On-Post Quarterly Groundwater Monitoring Report for the Camp Stanley Storage Activity installation in Boerne, Texas accurately represents the site conditions of the subject area. This certification is limited only to geoscientific products contained in the subject report and is made on the basis of written and oral information provided by the CSSA Environmental Office, laboratory data provided by APPL Laboratories, and field data obtained during groundwater monitoring conducted at the site in June 2020 and is true and accurate to the best of my knowledge and belief.



Idra Lik

Adrien Lindley, P.G. State of Texas Geology License No. 10487

7/28/2020

Date

TABLE OF CONTENTS

EXEC	UTIVE	E SUMMARY	ii
GEOS	CIENT	TIST CERTIFICATION	iii
APPE	NDICE	S	iv
LIST	OF TAI	BLES	v
LIST	OF FIG	JURES	v
ACRC	ONYMS	SAND ABBREVIATIONS	vi
1.0	INTRO	ODUCTION	1-1
2.0	POST	-WIDE FLOW DIRECTION AND GRADIENT	2-1
3.0	JUNE	ANALYTICAL RESULTS	
	3.1	Monitoring Wells	
	3.2	Westbay-equipped Wells	
4.0	JUNE	2019 SUMMARY	4-1

APPENDICES

Appendix A	Evaluation of Data Quality Objectives Attainment
Appendix B	Quarterly On-Post Groundwater Monitoring Analytical Results, June 2020
Appendix C	Data Validation Report

LIST OF TABLES

Table 2.1	Measured Groundwater Elevations – June 2020	2-2
Table 2.2	Changes in Groundwater Elevation from Previous Quarter - June 2020	2-3
Table 3.1	Overview of the On-Post Monitoring Program	3-3
Table 3.2	Overview of the On-Post Monitoring Program (Westbay)	3-4
Table 3.3	June 2020 On-Post Quarterly Groundwater Results, Detected Analytes	3-6

LIST OF FIGURES

Figure 2.1	June 2020 Potentiometric Surface Map, LGR Wells Only	
Figure 2.2	June 2020 Potentiometric Surface Map, BS Wells Only	
Figure 2.3	June 2020 Potentiometric Surface Map, CC Wells Only	
Figure 2.4	Average LGR Groundwater Elevations and Quarterly Precipitation	2-7
Figure 3.1	On-Post & Off-Post Well Sampling Locations for June 2020	
Figure 3.2	Cumulative VOC Concentrations vs. Groundwater Elevation	

ACRONYMS AND ABBREVIATIONS

шаЛ	microgram per liter
$\frac{\mu g/L}{83008(h) Order}$	microgram per liter RCRA 3008(h) Administrative Order on Consent
§3008(h) Order	
AL	Action Level
AOC	Area of Concern
APPL	Agriculture and Priority Pollutants Laboratories, Inc.
BS	Bexar Shale
BTOC	below top of casing
CC	Cow Creek
cis-1,2-DCE	cis-1,2-Dichloroethene
COC	constituents of concern
CSSA	Camp Stanley Storage Activity
DQO	Data Quality Objectives
HSP	Health and Safety Plan
ISCO	In-Situ Chemical Oxidation
LGR	Lower Glen Rose
LTMO	Long-Term Monitoring Optimization
MCL	Maximum Contaminant Level
MDL	Method Detection Limit
MSL	mean sea level
NA	Not Available
PCE	Tetrachloroethene
P.G.	Professional Geologist
Parsons	Parsons Government Services, Inc.
QAPP	Quality Assurance Project Plan
RCRA	Resource Conservation and Recovery Act
RL	Reporting Limit
SAP	Sampling and Analysis Plan
SAWS	San Antonio Water System
SS	Secondary Standard
SWMU	Solid Waste Management Units
TCE	Trichloroethene
TCEQ	Texas Commission on Environmental Quality
TGRGCD	Trinity-Glen Rose Groundwater Conservation District
UGR	Upper Glen Rose
USEPA	United States Environmental Protection Agency
VOC	Volatile Organic Compound
WS	Weather Station

JUNE 2020 GROUNDWATER MONITORING REPORT CAMP STANLEY STORAGE ACTIVITY, TEXAS

1.0 INTRODUCTION

This report presents results from the on-post quarterly sampling performed at Camp Stanley Storage Activity (CSSA) in June 2020. Laboratory analytical results are presented along with potentiometric contour maps. Results from all four 2020 quarterly monitoring events (March, June, September, and December) will be described in detail in the 2020 Annual Report. The Annual Report will also provide an interpretation of all analytical results and an evaluation of any temporal or spatial trends observed in the groundwater contaminant plume during investigations. For this specific quarter, groundwater monitoring was performed June 1st through 12th, 2020 by Parsons Government Services, Inc. (Parsons).

Current objectives of the groundwater monitoring program are to determine groundwater flow direction and elevations, determine groundwater contaminant concentrations for characterization purposes, and identify meteorological and seasonal variations in physical and chemical properties. **Appendix A** identifies the data quality objectives (DQOs) for CSSA's groundwater monitoring program, along with an evaluation of whether each DQO was attained. The objectives listed in **Appendix A** also reference appropriate sections of the Resource Conservation and Recovery Act (RCRA) **§3008(h) Administrative Order on Consent** [§3008(h) Order].

The CSSA groundwater monitoring program follows the provisions of the groundwater monitoring program DQOs as well as the recommendations of the **Three-Tiered Long Term Monitoring Network Optimization (LTMO) Evaluation (Parsons, 2015)** which provided recommendations for sampling based on an LTMO study performed for the CSSA groundwater monitoring program. The LTMO evaluation was updated in 2015 using groundwater data from monitoring conducted between 2010 and 2015. The proposed LTMO changes/updates were approved by the TCEQ and USEPA April 22 and May 5, 2016, respectively. These changes were briefed to the public in the 2016 Annual Fact Sheet. The updated LTMO study sampling frequencies were implemented in December 2016. The groundwater program is currently drafting a subsequent update to the LTMO based on data collected from 2015 to 2019.

2.0 POST-WIDE FLOW DIRECTION AND GRADIENT

Due to below average rainfall in 2019 the aquifer levels sustained a net loss of 136.22 feet in average water level elevation beneath CSSA and decreased to 33.67 feet below the 15-year average (2005-2019). In the second quarter of 2020 the rainfall recorded was slightly below average, 8.23 inches at the AOC-65 WS and 11.09 at the SWMU B-3 WS. The average rainfall for April through June for the Boerne area is 11.37 inches. The aquifer sustained a net gain of 37.37 feet. The San Antonio Water System (SAWS) restrictions remain in 'year-round watering' since October 2, 2018 and the Trinity-Glen Rose Groundwater Conservation District (TGRGCD) also remained in 'year-round' watering restrictions.

The 30-year precipitation normal for the San Antonio area for the three-month period of April through June is 10.08 inches of rainfall. Over the 3-month period of record, the AOC-65 weather station at CSSA, recorded 8.23 inches of rainfall (1.51 inches in April, 4.2 inches in May, and 2.52 inches in June). The B-3 WS recorded 11.09 inches of rainfall (1.82 inches in April, 7.36 inches in May, and 1.91 inches in June). Of the 32 rain events at the AOC-65 WS during this timeframe, 3 events had a daily rainfall total in excess of 1 inch while B-3 WS recorded 30 events also having 3 daily totals above 1 inch.

Fifty-six water level measurements were recorded on June 12, 2020 from on- and off-post monitoring wells completed in the Lower Glen Rose (LGR), Bexar Shale (BS), and Cow Creek (CC) formational members of the Middle Trinity Aquifer (**Tables 2.1 and 2.2**). The groundwater potentiometric surface maps illustrating groundwater elevations from the LGR, BS, and CC zones in June 2020 are shown in **Figures 2.1, 2.2, and 2.3**, respectively.

The June 2020 potentiometric surface map for LGR-screened wells (**Figure 2.1**) exhibits a wide range of groundwater elevations, from a minimum of 923.99 feet above mean sea level (MSL) at CS-1 to a maximum of 1095.84 feet above MSL at CS-MW4-LGR. Groundwater elevations are generally higher in the northern and central portions of CSSA and decrease to the southeast. As measured in all non-pumping wells, the average groundwater elevation measured in June 2020 was 1032.12 feet above MSL. This is 0.63 feet below the 17.5-year average LGR groundwater elevation for the area (1032.75 feet) (**Figure 2.4**). Also shown in that figure is the 3-month precipitation total (9.58 inches) recorded at the San Antonio International Airport weather station (KSAT) and the resultant aquifer response. In June, an average increase in LGR groundwater elevation of 40.79 feet was observed within CSSA LGR monitoring wells from the previous quarter.

Well CS-MW4-LGR, located in the central portion of CSSA, typically has one of the highest groundwater elevations of LGR-screened wells. During average and above-average aquifer elevations, the groundwater level is 20 to 30 feet higher than the nearest comparable wells (CS-MW2-LGR and CS-MW5-LGR), creating a pronounced groundwater mound in the central portion of the facility. Long-term monitoring has ascertained that when groundwater near CS-MW4-LGR rises above about 970 feet MSL, the mounding effect is evident. In June 2020, mounding was observed as the groundwater elevation at CS-MW4-LGR (1,095.84 feet MSL) was 66 feet higher than at CS-MW2-LGR (1029.88 feet MSL) and CS-MW5-LGR (1,029.75 feet MSL).

Table 2.1 **Measured Groundwater Elevation** June 2020

$\begin{tabular}{ c c c c c c c c c c c c c c c c c c c$					Formations Screened			
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	Well ID:	TOC elevation	Depth to Groundwater	Groundwater Elevation	LGR	BS	сс	Date
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$								6/12/2020
CS-3 1240.17 2148.2 1023.35 X ALL 612 CS-10 1331.51 306.63 1022.04 ALL 612 CS-13 1139.26 176.03 1017.23 ALL 612 CS-0 1236.05 215.78 1020.25 X 612 CS-MW64.0R 1338.14 279.62 1048.52 X 612 CS-MW14.0R 1319.19 287.31 1047.89 X 612 CS-MW14.0R 1220.09 287.31 102.92 X 612 CS-MW14.0G 1221.09 212.17 X 612 CS-MW14.0G 122.17.08 207.20 102.88 X 612 CS-MW4.10G 139.14 305.42 102.47 X 612 CS-MW4.10G 129.71 107.88 X 612 CS-MW4.10G 129.71 109.75 X 612 CS-MW4.10G 129.77 170.52 103.75 X 612 CS-MW4.					v		1	6/12/2020
						÷		6/12/2020
CS-12 174.09 233.05 1021.04 - ALL 61/2 CS-D 1236.03 215.78 1020.25 X 61/2 CS-MWGLGR 1338.14 279.62 1014.52 X 61/2 CS-MWHLGR 1315.20 267.31 1017.89 X 61/2 CS-MWH-LGR 1221.09 218.73 1002.38 X 61/2 CS-MWH-BS 1221.09 218.71 1002.38 X 61/2 CS-MWH-GR 1227.08 207.03 1029.92 X K 61/2 CS-MWH-GR 1221.09 218.71 1002.38 X K 61/2 CS-MW-GR 1237.08 207.30 1029.98 X K 61/2 CS-MW+GR 1290.71 13.87 1095.84 X K 61/2 CS-MW+GR 1292.7 105.53 10/6.74 X K 61/2 CS-MW+GR 1292.7 10/5.55 10/6.74 X 61/2					А			6/12/2020
CS-13 1193.26 176.03 1017.23 X LI 61/2 CS-0 1236.03 215.78 100.25 X 61/2 CS-MWGLGR 1328.14 279.62 1048.52 X 61/2 CS-MWHLGR 1319.19 281.13 1063.66 X 61/2 CS-MWHLGR 1220.73 109.81 1002.92 X 61/2 CS-MWHCC 1221.99 218.71 1002.88 X 61/2 CS-MWHCC 1227.08 207.20 1029.88 X 61/2 CS-MW2-LGR 1230.71 13.37 109.84 X 61/2 CS-MW3-LGR 1341.41 305.42 1028.75 X 61/2 CS-MW4-LGR 1340.24 310.49 1029.75 X 61/2 CS-MW-LGR 1222.67 195.20 1040.05 X 61/2 CS-MW-LGR 1222.77 170.52 103.75 X 61/2 CS-MW-LGR 1220.73 221.23 1040.0								
CS-D 1236.03 215.78 1020.25 X 0 612 CS-MWG-LGR 1319.19 238.13 1088.06 X 612 CS-MWH-LGR 1315.20 267.31 1017.89 X 612 CS-MWH-LGR 1221.09 2121.99 218.71 1002.38 X 612 CS-MW1-LGR 1227.08 207.02 1002.88 X 612 612 CS-MW2-LGR 1237.08 207.20 1002.88 X C 612 CS-MW3-LGR 1237.08 207.20 1002.87 X C 612 CS-MW3-LGR 134.04 30.49 1029.75 X C 612 CS-MW4-LGR 1222.67 195.33 108.57.4 X 612 CS-MW4-LGR 1222.71 105.53 X C 612 CS-MW4-LGR 1222.71 105.53 102.25 102.05 X C 612 CS-MW4-CG 1223.41 107.05 X C								6/12/2020
CS-MWCLGR 1328.14 279.62 1008.852 X Image: https://doi.org/10.1011/001100000000000000000000000000					**	ALL	T	6/12/2020
CS-MWH-LGR 1315.20 267.31 1047.89 X 6122 CS-MW1-LGR 1221.09 190.31 1009.92 X 6122 CS-MW1-LGR 1221.09 218.71 1002.38 X 6122 CS-MW1-CC 1221.09 218.71 1002.38 X 6122 CS-MW1-CC 1221.09 218.71 1002.38 X 6122 CS-MW2-CC 124.011 225.42 1014.69 X 6122 CS-MW3-LGR 133.14 306.42 108.72 X 6122 CS-MW3-LGR 134.04 306.42 109.955.4 X 6122 CS-MW3-LGR 134.25 192.20 1040.05 X 6122 CS-MW6-LGR 1232.67 195.33 1036.74 X 6122 CS-MW7-LGR 120.27 170.52 101.35 X 6122 CS-MW7-LGR 120.43 173.43 1082.30 X 6122 CS-MW7-CC 120.44 170.00 1090.44 7 X 6122 CS-MW7-CC 120.453 173.43 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>6/12/2020</td>								6/12/2020
CS-1 1315.20 267.31 1047.89 X 6122 CS-MW1LGR 1220.73 109.81 1029.92 X 6122 CS-MW1RS 1221.09 218.71 1002.38 X K 6122 CS-MW1CC 1221.39 109.22 102.17 X K 6122 CS-MW2ALGR 1237.08 207.20 1029.98 X X 6122 CS-MW3ALGR 133.14 305.42 109.872 X 6122 6122 CS-MW5LGR 134.0.24 310.49 109.75 X 6122 6122 CS-MW6LGR 1232.25 192.20 1040.05 X X 6122 CS-MW6LGR 1232.27 170.52 1031.75 X 6122 6122 CS-MW7LGR 1202.77 170.82 1031.75 X 6122 6122 CS-MW7LGR 1202.7 170.82 1031.73 X 6122 6122 CS-MW7LGR 120.77 22.35								6/12/2020
CS-MW1-LGR 122.073 190.81 1002.98 X X 612 CS-MW1-CC 122.139 199.22 1022.17 - X 612 CS-MW1-CC 122.139 199.22 102.217 - X 612 CS-MW2-CC 120.011 225.42 1014.69 X 612 612 CS-MW2-CC 120.011 225.42 1014.69 X - 612 CS-MW3-LGR 130.12 100.95.84 X - 612 CS-MW4-LGR 130.02 100.95 X - 612 CS-MW4-LGR 120.27 195.93 106.07.4 X 612 CS-MW7-LC 120.14 170.90 103.034 - X 612 CS-MW7-LC 120.14 170.90 103.034 - X 612 CS-MW7-LC 120.14 170.90 103.05.0 X - 612 CS-MW9-LGR 125.7.7 23.35 104.92 X 612 612 CS-MW9-LGR 125.7.3 29.03 1005.01 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>6/12/2020</td></td<>								6/12/2020
CS-MW1-BS 121.09 218.71 100.2.8 X 67 CS-MW1-CC 121.39 207.20 1029.88 X 672 CS-MW2-CC 124.01 255.42 1014.69 X 672 CS-MW2-CC 124.01 135.52 102.872 X X 672 CS-MW4-LGR 134.01 30.542 108.872 X X 672 CS-MW5-LGR 134.021 310.69 102.75 X 672 672 CS-MW6-LGR 1222.67 19.9.93 106.674 X 612 672 CS-MW6-LGR 1222.67 19.9.93 1005.75 X 612 672 CS-MW7-LGR 120.27 170.52 1031.75 X 612 672 CS-MW8-LGR 120.87 223.55 100.994 X 612 672 CS-MW8-LGR 129.55 20.93 1025.02 X 612 672 CS-MW8-LGR 129.77 223.25 1014.90 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>6/12/2020</td></td<>								6/12/2020
CS-MW1-CC 121.39 199.22 102.217 ············ X 6127 CS-MW2-CC 123.01 225.42 1014.69 ·········· X 612 CS-MW2-CC 123.01 125.42 1018.67 X 612 612 CS-MW4-LGR 130.14 305.42 1028.72 X 612 612 CS-MW5-LGR 130.024 310.49 1029.75 X 612 612 CS-MW6-LGR 1232.267 195.93 1066.74 X 612 612 CS-MW6-CC 1233.21 170.68 1035.53 X 612 612 CS-MW7-CC 120.18 170.90 1030.94 X 612 612 CS-MW7-CC 120.53 170.18 1038.17 X 612 612 CS-MW9-CC 120.55 120.33 1003.50 X 612 612 CS-MW9-LGR 1256.73 122.33 1004.92 X 612 612 CS-MW9-LGR					Х			6/12/2020
CS-MW2-LGR 1237.08 207.20 1029.88 X Image: height of the state of t	CS-MW1-BS	1221.09	218.71	1002.38		Х		6/12/2020
CS-MW2-CC 1240.11 225.42 1014.69	CS-MW1-CC	1221.39	199.22	1022.17			X	6/12/2020
CS-MW3-LGR 133.414 305.42 1028.72 X 612 CS-MW4-LGR 1209.71 113.87 1005.84 X 612 CS-MW5-LGR 1340.24 310.49 1029.75 X 612 CS-MW6-LGR 1232.25 192.20 1040.05 X 612 CS-MW6-BS 1232.27 170.52 1031.75 X 612 CS-MW7-LGR 1202.27 170.52 1031.75 X 612 CS-MW8-LGR 120.83 170.18 1030.94 X 612 CS-MW8-LGR 1208.55 170.18 1030.94 X 612 CS-MW8-LGR 1208.55 1014.92 X 612 CS-MW8-LGR 1256.73 212.93 1043.80 X 612 CS-MW9-LGR 1257.73 212.93 1043.80 X 612 CS-MW9-LGR 1259.57 230.93 1025.02 X 612 CS-MW10-LGR 1189.53 169.02 1020.51 X 612 CS-MW10-LGR 1205.52 201.41 1002.11 X	CS-MW2-LGR	1237.08	207.20	1029.88	Х			6/12/2020
CS-MW4-LGR 1209.71 113.87 1095.84 X 6122 CS-MW6-LGR 130.24 310.49 102.20 1040.05 X 612 CS-MW6-BS 1232.25 192.20 1040.05 X K 612 CS-MW6-BS 1232.67 195.93 1036.74 X K 612 CS-MW7-BR 1202.27 170.52 1031.75 X K 612 CS-MW7-CC 120.84 170.90 103.094 X 612 612 CS-MW8-LGR 1208.35 170.18 1038.17 X K 612 CS-MW9-LGR 1257.27 232.35 1024.92 X K 612 CS-MW9-LGR 1257.27 232.35 1024.92 X K 612 CS-MW9-LGR 1257.27 232.35 1014.92 X 612 CS-MW9-LGR 1257.27 230.93 1020.51 X 612 CS-MW10-LGR 1195.33 160.02 1020.51	CS-MW2-CC	1240.11	225.42	1014.69			Х	6/12/2020
CS-MW5-LGR 1340.24 310.49 1029.75 X 6122 CS-MW6-BR 1232.25 192.0 104005 X 612 CS-MW6-BS 1232.67 195.93 1036.74 X 612 CS-MW6-CC 1233.21 197.68 1035.53 X 612 CS-MW7-LGR 1202.27 170.52 1031.75 X 612 CS-MW8-LGR 1208.35 170.18 1039.94 X 612 CS-MW8-LGR 1206.13 173.83 1032.30 X 612 CS-MW9-LGR 1256.73 212.93 1043.80 X 612 CS-MW9-LGR 1189.53 169.02 1020.51 X 612 CS-MW9-LGR 1189.53 169.02 1020.51 X 612 CS-MW10-LCR 1189.53 169.02 1020.51 X 612 CS-MW11A-LGR 1203.52 201.41 1002.11 X 612 CS-MW11A-LGR 1203.52 201.41 1002.11 X 612 CS-MW11A-LGR 1238.57 229.00 <td>CS-MW3-LGR</td> <td>1334.14</td> <td>305.42</td> <td>1028.72</td> <td>X</td> <td></td> <td></td> <td>6/12/2020</td>	CS-MW3-LGR	1334.14	305.42	1028.72	X			6/12/2020
CS-MW5-LGR 1340.24 310.49 1029.75 X 6122 CS-MW6-BR 1232.25 192.0 104005 X 612 CS-MW6-BS 1232.67 195.93 1036.74 X 612 CS-MW6-CC 1233.21 197.68 1035.53 X 612 CS-MW7-LGR 1202.27 170.52 1031.75 X 612 CS-MW8-LGR 1208.35 170.18 1039.94 X 612 CS-MW8-LGR 1206.13 173.83 1032.30 X 612 CS-MW9-LGR 1256.73 212.93 1043.80 X 612 CS-MW9-LGR 1189.53 169.02 1020.51 X 612 CS-MW9-LGR 1189.53 169.02 1020.51 X 612 CS-MW10-LCR 1189.53 169.02 1020.51 X 612 CS-MW11A-LGR 1203.52 201.41 1002.11 X 612 CS-MW11A-LGR 1203.52 201.41 1002.11 X 612 CS-MW11A-LGR 1238.57 229.00 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td> </td> <td>6/12/2020</td>								6/12/2020
CS-MW6-LGR 1232.25 192.20 1040.05 X 6122 CS-MW6-BS 1233.21 195.93 1036.74 X 612 CS-MW7-LGR 1202.27 170.52 1031.75 X X 612 CS-MW7-CC 1201.84 170.90 1030.94 X K 612 CS-MW8-LGR 1208.35 170.18 1038.17 X K 612 CS-MW8-LGR 1257.27 223.35 1024.92 X 612 612 CS-MW9-BS 1255.95 230.93 1025.02 X 612 612 CS-MW9-LGR 1189.53 160.02 1020.51 X 612 612 CS-MW10-LC 1189.03 160.02 1020.51 X 612 612 CS-MW10-LGR 1293.97 220.00 1030.07 X 612 612 CS-MW10-LC 1190.04 174.55 1015.07 X 612 612 CS-MW12-LCR 1259.07 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td> </td> <td>6/12/2020</td>								6/12/2020
CS-MW6-BS 1232.07 195.93 1036.74 X 612 CS-MW6-CC 1233.21 197.68 1035.53 X 612 CS-MW7-LGR 1202.27 170.52 1031.75 X 612 CS-MW8-LGR 1208.35 170.18 1030.94 X 612 CS-MW8-LGR 1206.13 173.83 1032.30 X 612 CS-MW9-LGR 1257.77 232.35 1024.92 X 612 CS-MW9-LGR 1257.73 212.93 1043.80 X 612 CS-MW9-LGR 1257.75 230.93 1025.02 X 612 CS-MW9-LGR 1189.53 169.02 1020.51 X 612 CS-MW1-LGR 1203.52 201.41 1002.11 X 612 CS-MW1-LGR 1204.03 186.30 1017.73 X 612 CS-MW12-LGR 1259.07 29.00 1030.07 X 612 CS-MW12-LGR 1259.07 29.00 1030.07 X 612 CS-MW12-LGR 1259.62 266.65 978.61 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td> </td> <td>6/12/2020</td>								6/12/2020
CS-MWF-CC 1233.21 197.68 1035.53 X 612 CS-MW7-LGR 1202.27 170.52 1031.75 X 612 CS-MW7-LGR 1208.35 170.18 1038.17 X 612 CS-MW8-LGR 1208.35 170.18 1038.17 X 612 CS-MW9-LGR 1257.27 232.35 1024.92 X X 612 CS-MW9-LGR 1255.73 212.93 1043.80 X 612 CS-MW9-LGR 1189.53 160.02 1020.51 X 612 CS-MW10-LGR 1189.53 160.02 1020.51 X 612 CS-MW10-LGR 1204.03 186.30 1017.73 X 612 CS-MW12-LGR 1204.03 186.30 1017.73 X 612 CS-MW12-LGR 1258.97 229.00 1030.17 X 612 CS-MW12-LGR 1259.07 229.00 1030.17 X 612 CS-MW12-LGR 1258.17 296.56 978.61 X 612						x		6/12/2020
CS-MW7-LGR 1202.27 170.52 103.75 X 612 CS-MW7-LCR 1201.84 170.90 1030.94 X 612 CS-MW8-LGR 1208.35 170.18 1038.17 X 612 CS-MW8-LGR 1208.35 170.18 1038.17 X 612 CS-MW9-LGR 1257.27 222.35 1024.92 X 612 CS-MW9-BS 1256.73 212.93 1043.80 X 612 CS-MW9-BCR 1189.53 169.02 1020.51 X 612 CS-MW10-LGR 1189.53 169.02 1020.51 X 612 CS-MW11A-LGR 1203.52 201.41 1002.11 X 612 CS-MW112-LGR 1203.52 201.41 1003.07 X 612 CS-MW12-LGR 1258.97 222.58 1035.79 X 612 CS-MW12-LGR 1257.31 229.12 1028.19 X 612 CS-MW16-LGR* 1244.60 243.75 1009.57 X 612 CS-MW16-LGR* 1244.60 243.75 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>x</td><td>6/12/2020</td></t<>							x	6/12/2020
CS-MW7-CC 1201.84 170.90 1030.91 X X 6122 CS-MW8-LGR 1208.35 170.18 1038.17 X 6122 CS-MW8-LGR 1257.27 232.35 1024.92 X K 6122 CS-MW9-LGR 1257.27 232.35 1024.92 X K 6122 CS-MW9-LGR 1257.77 232.35 1024.92 X K 6122 CS-MW9-LGR 1257.77 232.35 1024.92 X K 6122 CS-MW10-LGR 1189.53 169.02 1020.51 X K 6122 CS-MW10-LGR 1204.03 186.30 1017.73 X K 6122 CS-MW11A-LGR 1203.52 201.41 1002.11 X 6122 CS-MW12-LGR 1259.07 229.00 1030.07 X 6122 CS-MW12-LGR 1259.07 229.00 1030.07 X 6122 CS-MW12-LGR 1244.60 243.75 1008.85 X 6122 CS-MW14-LGR* 1244.60 243.75 1008.95					v		24	6/12/2020
CS-MW8-LGR 1208.35 170.18 1038.17 X 6122 CS-MW8-CC 1206.13 173.83 1032.30 X 6122 CS-MW9-LGR 1257.27 232.35 1024.92 X 6122 CS-MW9-BS 1256.73 212.93 1043.80 X 6122 CS-MW9-CC 1255.95 230.93 1025.02 X 6122 CS-MW10-LGR 1189.53 169.02 1020.51 X 6122 CS-MW10-LCC 1190.04 174.55 1015.49 X 6122 CS-MW11A-LGR 120.03 186.30 1017.73 X 6122 CS-MW11A-LGR 120.03 229.00 1030.07 X 6122 CS-MW12-LGR 1259.07 229.00 1030.07 X 6122 CS-MW12-LGR 1254.57 229.50 1019.01 X 6122 CS-MW12-LGR 1244.60 233.75 1000.85 X 6122 CS-MW12-LGR 1244.60 233.75 1000.85 X 6122 DS-EXW02* 1244.60 233.75					А		v	6/12/2020
CS-MW8-CC 1206.13 173.83 1032.30 X 6/12 CS-MW9-LGR 1257.27 232.35 1024.92 X 6/12 CS-MW9-BS 1256.73 212.93 1043.80 X 6/12 CS-MW9-CC 1255.95 230.93 1025.02 X X 6/12 CS-MW10-LGR 1189.53 169.02 1020.51 X C 6/12 CS-MW10-LGR 1190.04 174.55 1015.49 X 6/12 CS-MW11B-LGR 1203.52 201.41 1002.11 X 6/12 CS-MW12-LGR 1258.07 222.58 1035.07 X 6/12 CS-MW12-LGR 1258.37 222.58 1035.07 X 6/12 CS-MW16-LGR* 1244.60 243.75 1009.85 X 6/12 CS-MW16-LGR 1244.60 281.72 967.94 X 6/12 B3-EXW03* 1245.26 266.65 978.61 X 6/12 B3-EXW03* 1255.51 <td></td> <td></td> <td></td> <td></td> <td>v</td> <td></td> <td>А</td> <td>6/12/2020</td>					v		А	6/12/2020
CS-MW9-LGR 1257,27 232.35 1024.92 X 612 CS-MW9-BS 1256,73 212.93 1043.80 X 612 CS-MW9-CC 1255,95 230.93 1025.02 X 612 CS-MW10-LGR 1189.53 169.02 1020.51 X 612 CS-MW10-LGR 1189.53 169.02 1020.51 X 612 CS-MW11A-LGR 1204.03 186.30 1017.73 X 612 CS-MW11B-LGR 1204.03 186.30 1017.73 X 612 CS-MW12-LGR 1259.07 229.00 1030.07 X 612 CS-MW12-LGR 1258.37 222.58 1035.79 X 612 CS-MW16-LGR* 1244.60 243.75 1000.85 X 612 CS-MW16-LGR* 1244.60 243.75 1000.85 X 612 CS-MW16-LGR 1244.60 243.75 1000.85 X 612 CS-MW16-LGR 1244.60 243.75 1009.77 X 612 B3-EXW03* 1235.11 255.54					А		v	
CS-MW9-BS 1256.73 212.93 1043.80 X 612 CS-MW9-CC 1255.95 230.93 1025.02 X 612 CS-MW10-LGR 1189.53 169.02 1020.51 X K 612 CS-MW1A-LGR 1204.03 186.30 1017.73 X K 612 CS-MW1B-LGR 1203.52 201.41 1002.11 X 612 CS-MW1B-LGR 1203.52 201.41 1002.11 X 612 CS-MW12-LGR 1259.07 229.00 1030.07 X 612 CS-MW12-BS 1257.31 229.12 1028.19 X 612 CS-MW12-CC 1257.31 229.12 1028.19 X 612 CS-MW16-GR* 1244.60 243.75 1000.85 X 612 CS-MW16-GR* 1244.60 243.75 1009.85 X 612 B3-EXW01* 1245.26 266.65 978.61 X 612 B3-EXW04 1228.46 203.03 1025.43 X 612 B3-EXW04 1228.46					v		А	
CS-MW9-CC 1255.95 230.93 1025.02 X 61/2 CS-MW10-LGR 1189.53 169.02 1002.51 X 61/2 CS-MW10-LGR 1290.03 186.30 1017.73 X 61/2 CS-MW1LALGR 1204.03 186.30 1017.73 X 61/2 CS-MW12-LGR 1259.07 229.00 1030.07 X 61/2 CS-MW12-LGR 1259.07 229.00 1030.07 X 61/2 CS-MW12-DS 1258.37 222.58 1035.79 X 61/2 CS-MW12-CC 1257.31 229.12 1028.19 X 61/2 CS-MW16-CC 1244.51 225.50 1019.01 X 61/2 CS-MW16-CC 1244.51 225.50 1019.01 X 61/2 B3-EXW03* 1235.11 225.54 1009.57 X 61/2 B3-EXW04* 1249.66 281.72 967.94 X 61/2 CS-MW17-LGR 1257.01 225.38 1012.16 X 61/2 CS-MW18-LGR 1283.61 256.48					А	v		6/12/2020
CS-MW10-LGR 1189.53 169.02 1020.51 X 6/12/ CS-MW10-CC 1190.04 174.55 1015.49 X 6/12/ CS-MW1A-LGR 1204.03 186.50 1017.73 X 6/12/ CS-MW12-LGR 1203.52 201.41 1002.11 X 6/12/ CS-MW12-LGR 1259.07 229.00 1030.07 X 6/12/ CS-MW12-LGR 1259.07 229.00 1030.07 X 6/12/ CS-MW12-LGR 1259.37 222.58 1035.79 X 6/12/ CS-MW16-LGR* 1244.60 243.75 1000.85 X 6/12/ CS-MW16-LGR* 1244.50 245.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW17-LGR 1285.63						А	¥7	6/12/2020
CS-MW10-CC 1190.04 174.55 1015.49 X 6/12/ CS-MW11A-LGR 1204.03 186.30 1017.73 X 6/12/ CS-MW1B-LGR 1203.52 201.41 1002.11 X 6/12/ CS-MW12-LGR 1259.07 229.00 1030.07 X 6/12/ CS-MW12-CC 1258.37 222.58 1035.79 X 6/12/ CS-MW12-CC 1244.60 243.75 1000.85 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1235.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156							А	6/12/2020
CS-MW11A-LGR 1204.03 186.30 1017.73 X 6/12/ CS-MW11B-LGR 1203.52 201.41 1002.11 X 6/12/ CS-MW12-LGR 1259.07 229.00 103007 X 6/12/ CS-MW12-BS 1258.37 222.58 1035.79 X 6/12/ CS-MW12-CC 1257.31 229.12 1028.19 X 6/12/ CS-MW16-LGR* 1244.60 243.75 1000.85 X 6/12/ CS-MW16-LGR* 1244.50 266.65 978.61 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1022.46 X 6/12/ B3-EXW04 1228.46 203.03 1022.16 X 6/12/ CS-MW18-LGR 1283.61 255.33 101.63 X 6/12/ CS-MW19-LGR 1255.53 210.15					Х			6/12/2020
CS-MW11B-LGR 1203.52 201.41 1002.11 X 6/12/ CS-MW12-LGR 1259.07 229.00 1030.07 X 6/12/ CS-MW12-LGR 1259.07 229.00 1035.79 X 6/12/ CS-MW12-CC 1257.31 229.12 1028.19 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW18-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW20-LGR 1280.49 25							X	6/12/2020
CS-MW12-LGR 1259.07 229.00 1030.07 X 6/12/ CS-MW12-BS 1258.37 222.58 1035.79 X 6/12/ CS-MW12-CC 1257.31 229.12 1028.19 X 6/12/ CS-MW16-LGR* 1244.60 243.75 1000.85 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ CS-MW17-LGR 1257.01 225.58 1031.63 X 6/12/ CS-MW19-LGR 1257.01 225.48 1031.63 X 6/12/ CS-MW19-LGR 1259.43 1052.99 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052								6/12/2020
CS-MW12-BS 1258.37 222.58 1035.79 X 6/12/ CS-MW12-CC 1257.31 229.12 1028.19 X 6/12/ CS-MW16-LGR* 1244.60 243.75 1000.85 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1022.16 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1283.61 256.48 1031.63 X 6/12/ CS-MW19-LGR 1283.61 256.48 1052.99 X 6/12/ CS-MW20-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW21-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW22-LGR 1280.49 254.								6/12/2020
CS-MW12-CC 1257.31 229.12 1028.19 X 6/12/ CS-MW16-LGR* 1244.60 243.75 1000.85 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1022.16 X 6/12/ CS-MW17-LGR 1279.46 257.30 1022.16 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1289.04 255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW21-LGR 1280.49 230.74 1023.16 X 6/12/ CS-MW23-LGR 12					Х			6/12/2020
CS-MW16-LGR* 1244.60 243.75 1000.85 X 6/12/ CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1283.09 230.74 1025.02 X 6/12/ CS-MW23-LGR 1293.01 265.19						X		6/12/2020
CS-MW16-CC 1244.51 225.50 1019.01 X 6/12/ 6/12/ B3-EXW01* 1245.26 266.65 978.61 X 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW19-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW23-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.30 203.01 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>X</td> <td>6/12/2020</td>							X	6/12/2020
B3-EXW01* 1245.26 266.65 978.61 X 6 6/12/ B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW19-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1043.36 X 6/12/ CS-MW22-LGR 1288.20 233.18 1025.02 X 6/12/ CS-MW23-LGR 1255.90 230.74 1023.16 X 6/12/ CS-MW35-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1218.74 </td <td></td> <td></td> <td></td> <td></td> <td>X</td> <td></td> <td></td> <td>6/12/2020</td>					X			6/12/2020
B3-EXW02* 1249.66 281.72 967.94 X 6/12/ B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1022.43 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1288.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW35-LGR 1218.74 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>X</td><td>6/12/2020</td></td<>							X	6/12/2020
B3-EXW03* 1235.11 225.54 1009.57 X 6/12/ B3-EXW04 1228.46 203.03 1025.43 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW19-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.49 230.74 1023.16 X 6/12/ CS-MW24-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1218.74	B3-EXW01*	1245.26		978.61				6/12/2020
B3-EXW04 1228.46 203.03 1025.43 X 6/12/ B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW24-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW35-LGR 1218.74 178.89<	B3-EXW02*	1249.66	281.72	967.94	Х			6/12/2020
B3-EXW05 1279.46 257.30 1022.16 X 6/12/ CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW24-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW35-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.	B3-EXW03*	1235.11	225.54	1009.57	Х			6/12/2020
CS-MW17-LGR 1257.01 225.38 1031.63 X 6/12/ CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW24-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW24-LGR 1293.00 233.18 1025.02 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW35-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 1	B3-EXW04	1228.46	203.03	1025.43	Х			6/12/2020
CS-MW18-LGR 1283.61 256.48 1027.13 X 6/12/ CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW35-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ Mumber of wells screened in each format	B3-EXW05	1279.46	257.30	1022.16	Х			6/12/2020
CS-MW19-LGR 1255.53 210.15 1045.38 X 6/12/ CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ Mumber of wells screened in each formation. 37 4 9 6/12/	CS-MW17-LGR	1257.01	225.38	1031.63	X			6/12/2020
CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW24-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9 9	CS-MW18-LGR	1283.61	256.48	1027.13	Х			6/12/2020
CS-MW20-LGR 1209.42 156.43 1052.99 X 6/12/ CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9 9	CS-MW19-LGR		210.15	1045.38				6/12/2020
CS-MW21-LGR 1184.53 150.17 1034.36 X 6/12/ CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ Mumber of wells screened in each formation. 37 4 9 6/12/								6/12/2020
CS-MW22-LGR 1280.49 254.62 1025.87 X 6/12/ CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW24-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ Mumber of wells screened in each formation. 37 4 9								6/12/2020
CS-MW23-LGR 1258.20 233.18 1025.02 X 6/12/ CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9								6/12/2020
CS-MW24-LGR 1253.90 230.74 1023.16 X 6/12/ CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9 9								6/12/2020
CS-MW25-LGR 1293.01 265.19 1027.82 X 6/12/ CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9 9								6/12/2020
CS-MW35-LGR 1186.97 165.78 1021.19 X 6/12/ CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9								
CS-MW36-LGR 1218.74 178.89 1039.85 X 6/12/ CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9								6/12/2020
CS-MW37-LGR 1205.83 180.37 1025.46 X 6/12/ FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9								6/12/2020
FO-20 1327.00 263.48 1063.52 ALL 6/12/ Number of wells screened in each formation. 37 4 9								6/12/2020
Number of wells screened in each formation. 37 4 9					X			6/12/2020
			263.48	1063.52				6/12/2020
Average groundwater elevation in each formation given in feet (non pumping wells). 1032.12 1029.68 1025.54			-	1				
	00	in each formation given in	n feet (non pumping wells).		1032.12	1029.68	1025.54	

Notes:

Bold wells: CS-2, CS-10, CS-12, CS-13, and FO-20 are open boreholes across more than one formational unit.

? = Exact screening information unknown for this well.

Shaded wells are routinely pumped for either domestic, livestock, or environmental remediation purposes, and therefore are not used in calculating statistics.

CS-1, CS-10, CS-12, and CS-13 are current active drinking water wells.

CS-MW16-LGR, CS-MW16-CC, B3-EXW01 through B3-EXW05 pumps are cycling continuously to feed the B-3 Bioreactor.

* = submersible pump running at time of water level measurement.

Formational average groundwater elevation is calculated from non-pumping wells screened in only one formation.

All measurements given in feet. NA = Data not available

Table 2.2
Change in Groundwater Elevation from Previous Quarter
June 2020

Weil ID Mar. 2020 Elevations Jun. 2020 Elevations Jun. minus Mar CS-1* 981.30 1022.04 44.11 CS-2 981.30 1022.04 40.74 CS-3 985.25 1025.35 40.10 CS-10 975.81 1024.48 49.07 CS-13 964.30 1017.23 52.95 CS-14 1003.420 1048.52 14.32 CS-MWH-LGR 1031.420 1048.52 14.32 CS-MWH-LGR 989.44 1029.22 40.48 CS-MWH-LGR 989.44 1022.17 30.68 CS-MWH-LGR 989.74 1014.69 22.15 CS-MW2-LGR 989.74 1028.72 38.86 CS-MW2-LGR 989.74 1028.72 38.55 CS-MW2-LGR 989.74 1029.75 42.56 CS-MW4-LGR 1031.40 104.69 22.15 CS-MW4-LGR 1031.40 1040.05 56.56 CS-MW4-LGR 1031.75 39.45 CS-MW4-LGR	ge LCD	Formations Screen						
CS-2 981.30 1022.04 40.74 CS-3 985.25 1023.35 40.10 CS-10 975.81 1024.88 49.07 CS-12 1008.59 1021.04 12.45 CS-13 964.30 1017.23 52.93 CS-10 983.41 1020.25 36.84 CS-MWG-LGR 1034.20 1048.52 14.32 CS-MWH-LGR 1030.57 1038.06 7.49 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-LGR 989.44 1029.22 40.48 CS-MW1-LGR 989.44 1029.22 30.68 CS-MW2-LGR 989.88 1028.28 40.00 CS-MW2-LGR 987.4 1028.72 38.98 CS-MW3-LGR 987.4 1028.72 38.98 CS-MW4-LGR 1031.26 1095.84 64.38 CS-MW6-LGR 1031.26 1095.84 64.55 CS-MW6-LGR 992.30 1031.71 37.97 CS-MW6-LGR 99) LGR		CC					
CS-3 985.25 1025.35 40.10 CS-10 975.81 1022.488 49.07 CS-12 1008.59 1021.104 12.45 CS-13 964.30 1017.23 52.93 CS-50 983.41 1022.52 36.84 CS-MWG-LGR 1034.20 1048.52 14.32 CS-MWH-LGR 1021.47 1047.89 26.42 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-LGR 989.44 102.92.8 40.00 CS-MW1-CC 991.49 102.17 30.68 CS-MW2-LGR 989.88 1028.72 38.98 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW3-LGR 989.74 1028.75 42.56 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW4-LGR 989.82 1035.53 46.94 CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-LGR		ALL						
CS-10 975.81 1024.88 49.07 CS-12 1008.59 1021.04 12.45 CS-13 964.30 1017.23 52.93 CS-D 983.41 1020.25 36.84 CS-MWFLGR 1030.57 1038.06 7.49 CS-I 1021.47 1047.89 26.42 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-LGR 989.94 1022.17 30.68 CS-MW2-LGR 989.88 1029.88 40.00 CS-MW2-LGR 989.74 1028.72 38.98 CS-MW3-LGR 987.19 1029.75 42.56 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-LGR 992.30 1031.71 37.97 CS-MW8-LGR 1000.20 1038.17 37.94 CS-MW7-LGR	Х							
CS-12 1008.59 1021.04 12.45 CS-D 983.41 1020.25 36.84 CS-MWG-LGR 1034.20 1048.52 14.32 CS-MWH-LGR 1030.57 1038.06 7.49 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-LGR 989.44 1022.17 30.68 CS-MW2-LGR 989.58 1021.48 40.01 CS-MW2-LGR 989.74 1028.72 38.98 CS-MW3-LGR 1031.26 1095.74 46.55 CS-MW4-LGR 1031.26 1035.53 46.94 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.20 1035.53 46.94 CS-MW7-C 984.08 1030.94 46.86 CS-MW7-C 984.08 1030.94 46.85 CS-MW7-C 984.08 1031.75 39.45 CS-MW7-C </td <td>X</td> <td>X</td> <td></td>	X	X						
CS-13 964.30 1017.23 52.93 CS-D 983.41 1020.25 36.84 CS-MWGLGR 1034.20 1048.52 14.32 CS-MWHLGR 1030.57 1038.06 7.49 CS-I 1021.47 1047.89 26.42 CS-MW1-BS 990.71 1002.38 11.67 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW2-LGR 999.88 1029.88 40.00 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW3-LGR 987.19 1029.75 42.36 CS-MW3-LGR 987.19 1029.75 42.36 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.20 1031.75 39.45 CS-MW6-LGR 982.30 1031.75 39.45 CS-MW7-LGR 992.20 1031.75 39.45 CS-MW8-CC 988.53 1032.30 46.97 CS-MW8-CC 985.33 1032.30 46.97 CS-MW9-LGR		ALL						
CS-D 983.41 1020.25 36.84 CS-MWG-LGR 1034.20 1048.52 14.32 CS-MWI-LGR 1030.57 1038.06 7.49 CS-I 1021.47 1047.89 26.42 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-LGR 998.98 1022.17 30.68 CS-MW2-LGR 998.98 1029.88 40.00 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW3-LGR 1031.26 1095.84 64.58 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW8-CC 988.33 1032.30 46.97 CS-MW9-LGR 1000.20 1038.17 37.97 CS-MW9-LGR 992.71 1024.92 32.65 CS-MW9-		ALL						
CS-MWG-LGR 1034.20 1048.52 14.32 CS-MWH-LGR 1030.57 1038.06 7.49 CS-MWH-LGR 989.44 1029.92 40.48 CS-MWH-BS 990.71 1002.38 11.67 CS-MW1-CC 991.49 1022.17 30.68 CS-MW2-LGR 989.88 1029.88 40.00 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW3-LGR 987.19 1029.75 42.56 CS-MW3-LGR 987.19 1029.75 42.56 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW7-LGR 987.19 1029.75 42.56 CS-MW7-LGR 982.20 1031.75 39.45 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-LGR 992.27 1024.92 32.65 CS-MW7-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 32.65		ALL						
CS-MWH-LGR 1030.57 1038.06 7.49 CS-MWH-LGR 989.44 1029.22 40.48 CS-MWH-BS 990.71 1002.38 11.67 CS-MWH-CC 991.49 1022.17 30.68 CS-MW2-LGR 989.88 1029.88 40.00 CS-MW2-LGR 989.74 1028.72 38.98 CS-MW2-LGR 989.74 1029.75 42.56 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW4-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1000.20 1031.75 39.45 CS-MW7-CC 988.59 1035.53 46.94 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 995.81 1032.30 46.97 <	Х	X						
CS-I 1021.47 1047.89 26.42 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-BS 990.71 1002.38 11.67 CS-MW1-CC 991.49 1022.17 30.68 CS-MW2-LGR 989.88 1029.88 40.00 CS-MW2-LGR 989.74 1028.72 38.98 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW5-LGR 1031.26 1095.84 64.58 CS-MW5-LGR 987.19 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW8-CC 985.33 1032.30 46.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 22.65 CS-MW9-LGR 979.91 1017.73 37.82 CS-MU1	Х	X						
CS-I 1021.47 1047.89 26.42 CS-MW1-LGR 989.44 1029.92 40.48 CS-MW1-BS 990.71 1002.38 11.67 CS-MW1-CC 991.49 1022.17 30.68 CS-MW2-LGR 989.88 1029.88 40.00 CS-MW2-LGR 989.74 1028.72 38.98 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW5-LGR 987.19 1029.75 42.56 CS-MW5-LGR 987.19 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-C 988.82 1031.75 39.45 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW8-CC 985.33 1032.30 46.97 CS-MW8-LGR 1000.02 1038.17 37.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 22.65 CS-MW9-LGR 979.91 1017.73 37.82 CS-MW10-	Х							
CS-MW1-BS 990.71 1002.38 11.67 CS-MW2-CC 991.49 1022.17 30.68 CS-MW2-GR 998.98 1022.17 30.68 CS-MW2-CC 992.54 1014.69 22.15 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW4-LGR 1031.26 1005.84 64.58 CS-MW4-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 992.30 1031.75 39.45 CS-MW7-CC 988.59 1035.53 46.94 CS-MW7-CC 984.08 1030.94 46.86 CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 978.64 1020.51 41.87 CS-MW1-LGR 978.64 1025.02 1.79 CS-	Х							
CS-MW1-BS 990.71 1002.38 11.67 CS-MW1-CC 991.49 1022.17 30.68 CS-MW2-LGR 992.54 1014.69 22.15 CS-MW2-LGR 998.74 1028.72 38.98 CS-MW4-LGR 1031.26 1005.84 64.58 CS-MW4-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1035.53 46.94 CS-MW6-LGR 992.30 1031.75 39.45 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-CC 984.08 1030.94 46.86 CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-LGR 978.64 1020.51 41.87 CS-MW1-LGR 979.91 1017.73 37.82 <td< td=""><td>X</td><td></td><td></td></td<>	X							
CS-MW1-CC 991.49 1022.17 30.68 CS-MW2-LGR 989.88 1029.88 40.00 CS-MW3-LGR 989.74 1014.69 22.15 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW5-LGR 987.19 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 982.30 1031.75 39.45 CS-MW7-LGR 992.20 1035.53 46.94 CS-MW7-LGR 992.27 1024.92 32.65 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW1-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.51 1015.49 42.33		X						
CS-MW2-LGR 989.88 1029.88 40.00 CS-MW2-CC 992.54 1014.69 22.15 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW3-LGR 1031.26 1095.84 64.58 CS-MW5-LGR 989.719 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 992.30 1031.75 39.45 CS-MW6-CC 988.59 1030.94 46.86 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 41.35 CS-MW9-BG 978.64 1020.51 41.87 CS-MW10-CC 978.64 1020.51 44.23 CS-MW10-CC 972.96 1017.73 37.82 CS-MW10-CC 992.93 1035.79 39.98 <td< td=""><td></td><td></td><td>Х</td></td<>			Х					
CS-MW2-CC 992.54 1014.69 22.15 CS-MW3-LGR 989.74 1028.72 38.98 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW4-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-LGR 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW8-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 73.97 CS-MW8-LGR 992.27 1024.92 32.65 CS-MW8-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.73 1025.02 21.79 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 979.91 1017.73 37.82 CS-MW10-LGR 979.91 1017.73 37.82 CS-MW12-LGR 985.87 1030.07 44.20	Х	x						
CS-MW3-LGR 989.74 1028.72 38.98 CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW5-LGR 987.19 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-BS 989.82 1036.74 46.92 CS-MW7-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-LGR 972.27 1024.92 32.65 CS-MW1-LGR 978.64 1020.51 41.87 CS-MW10-CC 972.96 1015.49 42.53 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 985.87 1003.07 44.20 CS-MW10-LGR 978.64 1025.19 29.93	28	28	X					
CS-MW4-LGR 1031.26 1095.84 64.58 CS-MW5-LGR 987.19 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-BS 989.82 1035.73 46.94 CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW8-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 992.27 1024.92 32.65 CS-MW8-CC 985.33 1032.30 46.97 CS-MW9-LGR 992.27 1024.92 21.79 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 979.91 1017.73 37.82 CS-MW10-LGR 979.91 1017.73 37.82 CS-MW10-LGR 985.87 1030.07 44.20 CS-MW12-LGR 985.87 1030.07 44.20	х	v	А					
CS-MW5-LGR 987.19 1029.75 42.56 CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-BS 989.82 1036.74 46.92 CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-BC 1003.23 1020.51 41.87 CS-MW9-C 1003.23 1020.51 41.87 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.94 1035.79 39.98 CS-MW10-LGR 978.91 1017.73 37.82 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-LGR 984.11 1000.85 16.74 <	X							
CS-MW6-LGR 1003.40 1040.05 36.65 CS-MW6-BS 989.82 1036.74 46.92 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 990.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 978.64 1025.02 21.79 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-CC 972.96 1015.49 42.53 CS-MW11A-LGR 979.91 1017.73 37.82 CS-MW12-LGR 985.81 1035.79 39.98 CS-MW12-LGR 985.81 1035.79 39.98 CS-MW12-LGR 984.11 1000.85 16.74 CS-MW16-LGR 984.36 1002.16 39.08								
CS-MW6-BS 989.82 1036.74 46.92 CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-CC 985.33 1032.30 46.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-BC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.96 1015.73 37.82 CS-MW1A-LGR 1000.27 1002.11 1.84 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-LGR 985.87 1038.79 39.98 CS-MW12-LGR 985.87 1038.79 39.98 CS-MW12-LGR 984.11 1000.85 16.74 CS-MW16-LGR 984.11 1008.57 40.94	X							
CS-MW6-CC 988.59 1035.53 46.94 CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.64 1002.11 1.84 CS-MW11A-LGR 979.91 1017.73 37.82 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-LGR 984.11 1000.85 16.74 CS-MW12-LGR 984.11 1000.85 16.74 CS-MW12-LGR 984.11 1000.85 16.74 CS-MW16-LGR 984.11 1000.85 16.74	Х							
CS-MW7-LGR 992.30 1031.75 39.45 CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LC 985.33 1032.30 46.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-C 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 972.96 1015.49 42.53 CS-MW11A-LGR 979.91 1017.73 37.82 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-BS 995.81 1035.79 39.98 CS-MW12-BS 995.81 1035.79 39.98 CS-MW12-BS 995.81 1035.79 39.98 CS-MW12-C 998.26 1028.19 29.93 CS-MW12-LGR 984.11 1000.85 16.74 CS-MW12-LGR 984.11 1000.57 40.94		Х						
CS-MW7-CC 984.08 1030.94 46.86 CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 990.20 1032.30 46.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-LGR 978.91 1017.73 37.82 CS-MW11A-LGR 1000.27 1002.11 1.84 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-LGR 985.61 1028.19 29.93 CS-MW12-CC 998.26 1028.19 29.93 CS-MW12-CC 998.26 1028.19 29.93 CS-MW12-CC 998.26 1028.19 29.93 CS-MW12-CC 998.26 1028.19 29.93			Х					
CS-MW8-LGR 1000.20 1038.17 37.97 CS-MW8-LGR 985.33 1032.30 46.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-BS 996.48 1043.80 47.32 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-CC 972.96 1015.49 42.53 CS-MW11A-LGR 979.91 1017.73 37.82 CS-MW11B-LGR 1000.27 1002.11 1.84 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-BS 995.81 1035.79 39.98 CS-MW12-CC 998.26 1028.19 29.93 CS-MW16-CC* 910.74 1019.01 108.27 B3-EXW01* 937.21 978.61 41.40 B3-EXW02* 951.56 967.94 16.38 B3-EXW03* 968.63 1009.57 40.94 B3-EXW04 986.99 1025.43 38.44 <td< td=""><td>Х</td><td>X</td><td></td></td<>	Х	X						
CS-MW8-CC 985.33 1032.30 46.97 CS-MW9-LGR 992.27 1024.92 32.65 CS-MW9-LGR 996.48 1043.80 47.32 CS-MW9-CC 1003.23 1025.02 21.79 CS-MW10-LGR 978.64 1020.51 41.87 CS-MW10-CC 972.96 1015.49 42.53 CS-MW11A-LGR 979.91 1017.73 37.82 CS-MW11B-LGR 1000.27 1002.11 1.84 CS-MW12-LGR 985.87 1030.07 44.20 CS-MW12-BS 995.81 1035.79 39.98 CS-MW12-CC 998.26 1028.19 29.93 CS-MW16-CC* 910.74 1019.01 108.27 B3-EXW01* 937.21 978.61 41.40 B3-EXW03* 968.63 1009.57 40.94 B3-EXW04 986.99 1025.43 38.44 B3-EXW05 983.08 1022.16 39.08 CS-MW17-LGR 981.81 1031.63 49.82 <td< td=""><td></td><td></td><td>Х</td></td<>			Х					
CS-MW9-LGR992.271024.9232.65CS-MW9-BS996.481043.8047.32CS-MW9-CC1003.231025.0221.79CS-MW10-LGR978.641020.5141.87CS-MW10-CC972.961015.4942.53CS-MW11A-LGR979.911017.7337.82CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-LGR995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW12-CC998.261028.1929.93CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW04986.991022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW19-LGR993.341032.7134.467CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.0237.31CS-MW22-LGR977.841025.8748.03CS-MW22-LGR987.711025.0237.31CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.511025.4639.95FO-201062.491063.52-1.03	Х	X						
CS-MW9-BS996.481043.8047.32CS-MW9-CC1003.231025.0221.79CS-MW10-LGR978.641020.5141.87CS-MW10-CC972.961015.4942.53CS-MW11A-LGR979.911017.7337.82CS-MW11A-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR99.331045.3855.05CS-MW18-LGR99.331045.3855.05CS-MW12-LGR993.841052.9959.15CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.0237.31CS-MW22-LGR977.841025.8748.03CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.511025.4639.95FO-201062.491063.52-1.03			Х					
CS-MW9-CC1003.231025.0221.79CS-MW10-LGR978.641020.5141.87CS-MW10-CC972.961015.4942.53CS-MW11A-LGR979.911017.7337.82CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR993.841052.9959.15CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.0237.31CS-MW21-LGR987.711025.0237.31CS-MW21-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR977.841025.8748.03CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.511025.46 <td>Х</td> <td>X</td> <td></td>	Х	X						
CS-MW10-LGR978.641020.5141.87CS-MW10-CC972.961015.4942.53CS-MW11A-LGR979.911017.7337.82CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW19-LGR990.331045.3855.05CS-MW19-LGR993.841052.9959.15CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.0237.31CS-MW22-LGR977.841025.8748.03CS-MW25-LGR992.961027.8234.86CS-MW35-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.19 </td <td></td> <td>Х</td> <td></td>		Х						
CS-MW10-CC972.961015.4942.53CS-MW11A-LGR979.911017.7337.82CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-LGR985.871035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW19-LGR993.341052.9959.15CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.0237.31CS-MW22-LGR977.841025.8748.03CS-MW24-LGR984.561023.1638.60CS-MW25-LGR977.841025.8748.03CS-MW25-LGR978.691021.1942.50CS-MW35-LGR978.691023.1638.60CS-MW35-LGR978.691023.1638.60CS-MW35-LGR978.691021.8234.86CS-MW35-LGR978.691023.1638.60CS-MW35-LGR978.691023.1638.60CS-MW35-LGR978.691023.1639.95FO-201062.491063.52-1.03			Х					
CS-MW11A-LGR979.911017.7337.82CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW17-LGR990.331045.3855.05CS-MW19-LGR993.841052.9959.15CS-MW20-LGR993.841052.8748.03CS-MW23-LGR987.711025.0237.31CS-MW23-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR992.961027.8234.86CS-MW35-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	Х	X						
CS-MW11A-LGR979.911017.7337.82CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW17-LGR990.331045.3855.05CS-MW19-LGR993.841052.9959.15CS-MW20-LGR993.841052.8748.03CS-MW23-LGR987.711025.0237.31CS-MW23-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR992.961027.8234.86CS-MW35-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03			Х					
CS-MW11B-LGR1000.271002.111.84CS-MW12-LGR985.871030.0744.20CS-MW12-LGR995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR990.331045.3855.05CS-MW19-LGR993.841052.9959.15CS-MW20-LGR993.841052.9959.15CS-MW23-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW23-LGR987.711025.0237.31CS-MW23-LGR992.961027.18234.86CS-MW35-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	Х	X						
CS-MW12-LGR985.871030.0744.20CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.0237.31CS-MW22-LGR977.841025.8748.03CS-MW23-LGR984.561023.1638.60CS-MW24-LGR984.561023.1638.60CS-MW25-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	Х							
CS-MW12-BS995.811035.7939.98CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
CS-MW12-CC998.261028.1929.93CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR987.711025.8748.03CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03		X						
CS-MW16-LGR984.111000.8516.74CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03			Х					
CS-MW16-CC*910.741019.01108.27B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X	v						
B3-EXW01*937.21978.6141.40B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW35-LGR978.691021.1942.50CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	~	л	X					
B3-EXW02*951.56967.9416.38B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR984.561023.1638.60CS-MW24-LGR984.561027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	х	Y	Λ					
B3-EXW03*968.631009.5740.94B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03								
B3-EXW04986.991025.4338.44B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03								
B3-EXW05983.081022.1639.08CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03								
CS-MW17-LGR981.811031.6349.82CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
CS-MW18-LGR982.461027.1344.67CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
CS-MW19-LGR990.331045.3855.05CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
CS-MW20-LGR993.841052.9959.15CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
CS-MW21-LGR982.431034.3651.93CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
CS-MW22-LGR977.841025.8748.03CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	Х							
CS-MW23-LGR987.711025.0237.31CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	Х							
CS-MW24-LGR984.561023.1638.60CS-MW25-LGR992.961027.8234.86CS-MW35-LGR978.691021.1942.50CS-MW36-LGR1002.581039.8537.27CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	Х							
CS-MW25-LGR 992.96 1027.82 34.86 CS-MW35-LGR 978.69 1021.19 42.50 CS-MW36-LGR 1002.58 1039.85 37.27 CS-MW37-LGR 985.51 1025.46 39.95 FO-20 1062.49 1063.52 -1.03	Х							
CS-MW25-LGR 992.96 1027.82 34.86 CS-MW35-LGR 978.69 1021.19 42.50 CS-MW36-LGR 1002.58 1039.85 37.27 CS-MW37-LGR 985.51 1025.46 39.95 FO-20 1062.49 1063.52 -1.03	Х	X						
CS-MW35-LGR 978.69 1021.19 42.50 CS-MW36-LGR 1002.58 1039.85 37.27 CS-MW37-LGR 985.51 1025.46 39.95 FO-20 1062.49 1063.52 -1.03	Х	X						
CS-MW36-LGR 1002.58 1039.85 37.27 CS-MW37-LGR 985.51 1025.46 39.95 FO-20 1062.49 1063.52 -1.03	Х							
CS-MW37-LGR985.511025.4639.95FO-201062.491063.52-1.03	X							
FO-20 1062.49 1063.52 -1.03	X							
		ALL						
verage groundwater elevation change (all wells minus pumping wells) 37.37								
rage groundwater elevation change (an wens minus pumping wens) 57.57	40.55	40.55 36.47	35.98					

Notes:

Bold wells: CS-2, CS-10, CS-12, CS-13, and FO-20 are open boreholes across more than one formational unit.

? = Exact screening information unknown for this well.

Shaded wells are routinely pumped for either domestic, livestock, or environmental remediation purposes, and therefore are not used in calculating statistics. CS-1, CS-10, CS-12, and CS-13 are current active drinking water wells.


CS-MW16-LGR, CS-MW16-CC, B3-EXW01 through B3-EXW05 pumps are cycling continuously to feed the B-3 Bioreactor.


* = submersible pump running at time of water level measurement.


Formational average groundwater elevation change is calculated from non-pumping wells screened in only one formation.

All measurements given in feet.

NA = Data not available

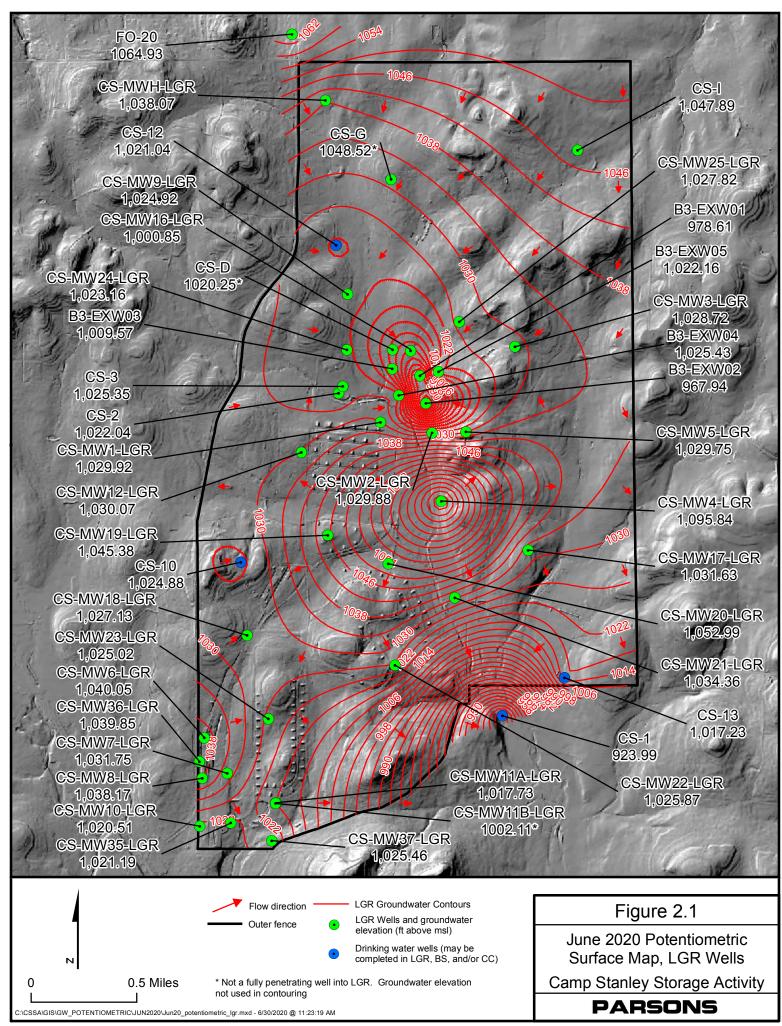

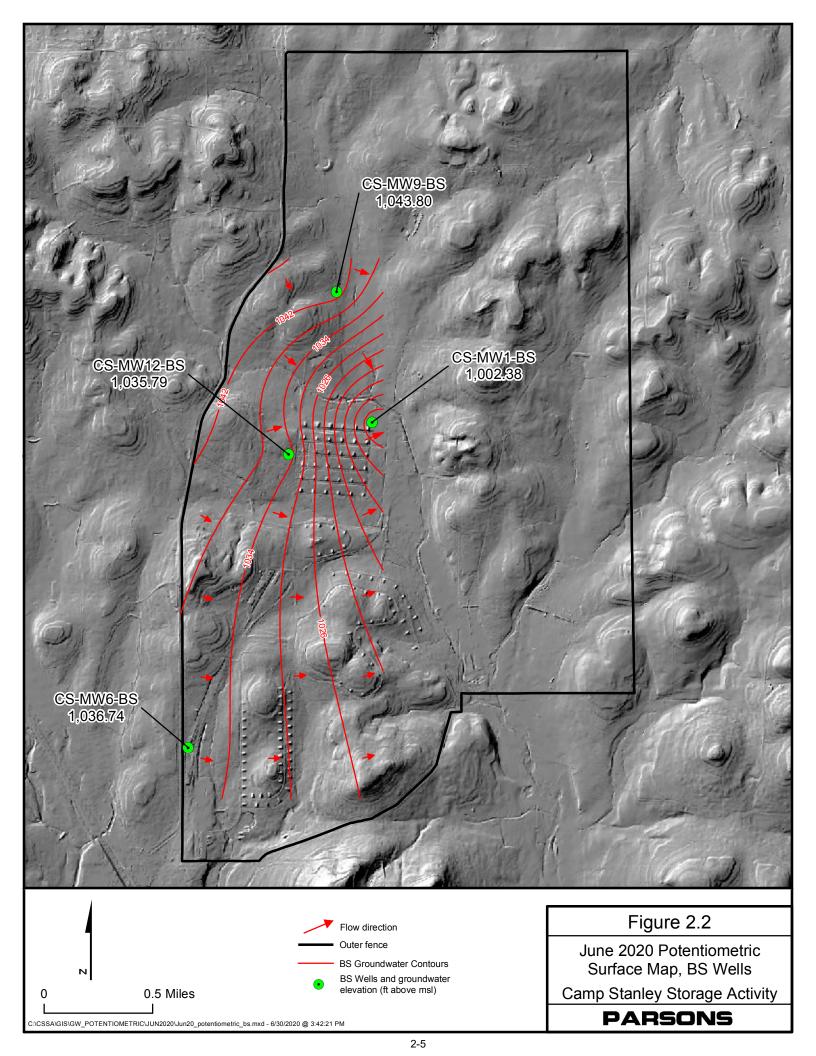

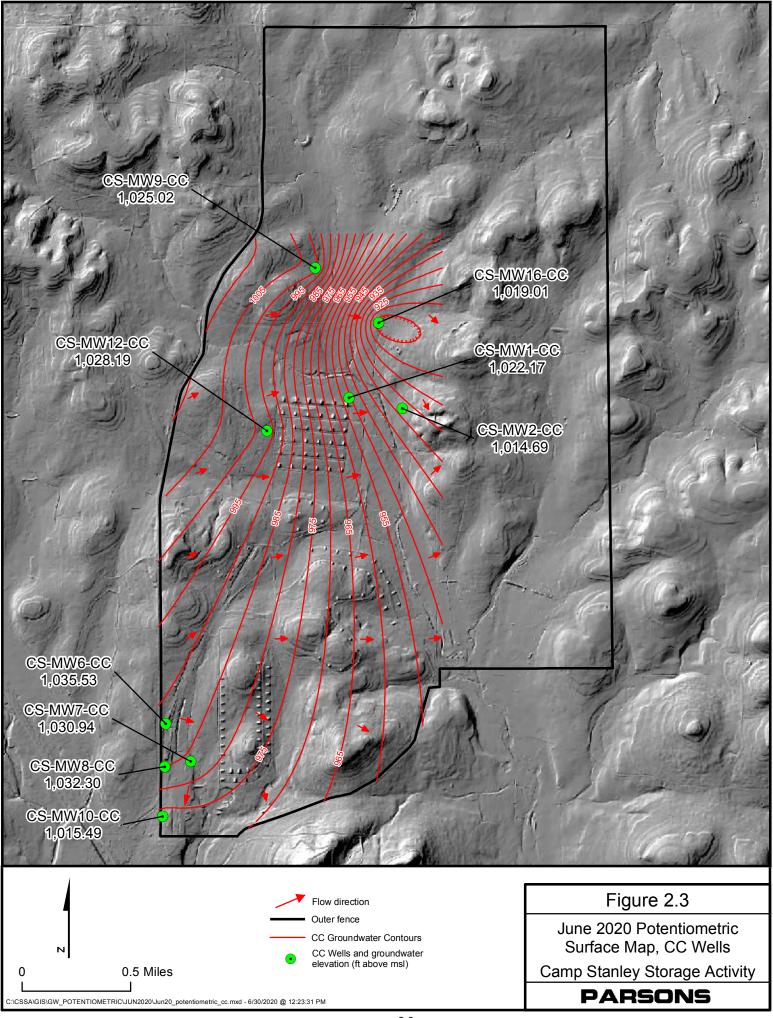

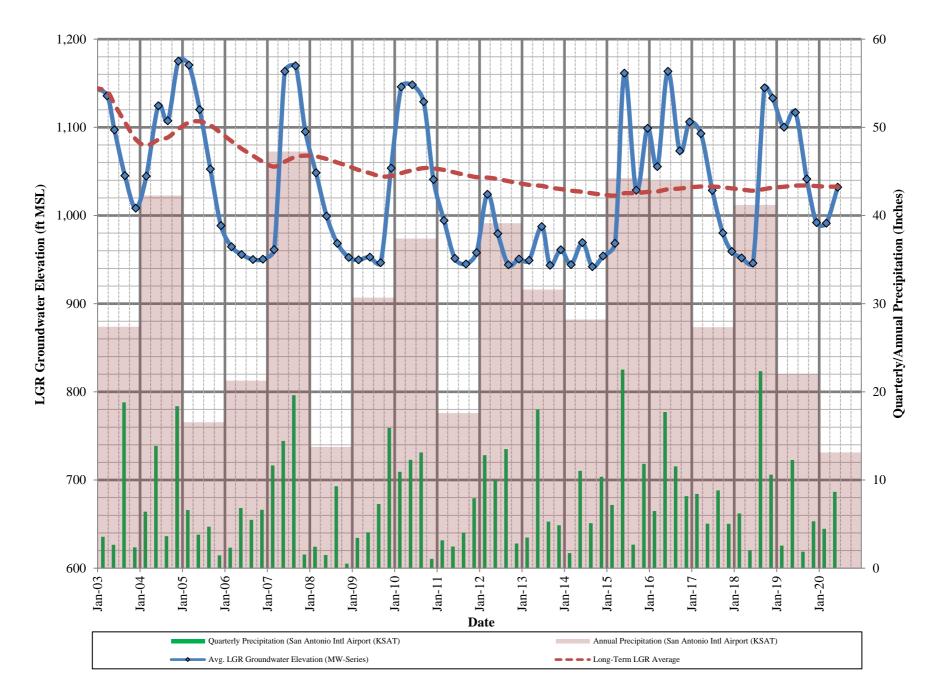


Figure 2.4 - Average LGR Groundwater Elevations and Quarterly/Annual Precipitation

J:\CSSA Program\Restoration\Groundwater\Surfer GW Files\Cumulative GW Map Elevations3.xlsx

It should be noted that well pumping on and around CSSA affects the potentiometric surface. On-post wells CS-MW16-LGR, CS-MW16-CC, B3-EXW01, B3-EXW02, B3-EXW03, B3-EXW04, and B3-EXW05 are cyclically pumped as part of the Bioreactor remediation system at Solid Waste Management Unit (SWMU) B-3. These remediation wells provide groundwater to the Bioreactor system and are automatically operated based upon water level within each well and availability within the storage tanks. Influences from the pumping of the Bioreactor extraction wells may be manifested as "cones of depression". The typical "cone of depression" is observed in the June 2020 LGR potentiometric surface map. The Bioreactor cone of depression is induced into the aquifer to extract contaminated water within its direct zone of influence, and otherwise retard the flow of the groundwater that cannot be directly captured by the extraction wells away from the site.

CSSA drinking water wells CS-1, CS-10, CS-12, and CS-13 are also cycled on and off to maintain the drinking water system currently in place at CSSA and, as a result, may manifest a cone of depression. Additionally, off-post water supply wells along Ralph Fair Road may also exert a subtle influence on gradients along the western and southern boundaries of the post. In June, a cone of depression is observed centered on the drinking water well CS-1 and slight depressions are observed at CS-10 and CS-12, however, no discernable off-post influences on the LGR potentiometric surface are observed.

Historical groundwater monitoring at CSSA has demonstrated that the aquifer gradient typically slopes in a south-southeast direction; however, variable aquifer levels and well-pumping scenarios can affect the localized and regional gradients (**Figure 2.1**). Average precipitation recorded during the quarter has resulted in an increase in water levels from those recorded in March 2020. The typical south-southeasterly gradient is not observed in the northern portion of the post in March 2020; instead, a more south-southwesterly gradient is present. In the central portion of the post, groundwater flow is interrupted by the cone of depression centered on bioreactor extraction wells and the groundwater mound at CS-MW4-LGR. In the south-central portion of the post, water levels are depressed at well CS-1, likely due to pumping action. In the southwest corner of the post, water levels indicate a more easterly component of groundwater flow which is in part due to the depressed water level at well CS-1. At the time water level measurements were collected, pumps were running at drinking water well CS-1, and B3-EXW-03-LGR which is reflected in the lower water levels at these wells and depicted cone(s) of depression on the LGR potentiometric surface map (Figure 2.1).

Pumping action at wells CS-1, CS-10, CS-12, CS-13, CS-MW16-LGR/CC, B3-EXW01 through B3-EXW05, CS-MWH-LGR, CS-I, and even off-post wells (Fair Oaks Ranch) can significantly alter the LGR groundwater gradient. The regional gradient calculation, an overall groundwater gradient averaged across CSSA, is measured from CS-MWH-LGR to CS-1 (0.0071299 ft/ft) indicating a southeasterly flow, however, flow is interrupted by a cone of depression in the north and mounding in the central portion of the post. At the southern end of the post a more steeply dipping south-southeasterly gradient of 0.0309187 ft/ft is observed, as measured between CS-MW4-LGR (top of the groundwater mound) and CS-1 (where active pumping was occurring at the time the well was gauged).

Under normal conditions, the potentiometric surface in both the BS and CC members of the aquifer generally trend in a southerly direction, similar to the LGR, but during periods of above-

average water levels or intense aquifer recharge, an eastward component in both the BS and CC may develop. In June 2020, the average groundwater elevation of the BS was 1,029.68 feet MSL, an increase of 36.47 feet since March; and groundwater flow was mainly to the southeast in the northern portion of the post and to the east in the southern portion of the post (**Figure 2.2**).

A review of historical data has shown that the CC potentiometric surface develops a predominantly easterly gradient when the average CC groundwater elevation is higher than 995 feet MSL. Below 995 feet MSL, the gradient resumes a more southerly flow direction. In June 2020, the average groundwater elevation for all non-pumping CC wells was 1,024.82 feet MSL and an easterly gradient is observed (**Figure 2.3**).

Groundwater elevations have been measured and recorded since 1992. Previous droughts resulted in water levels decreasing substantially in 1996, 1999, 2000, 2006, 2008, 2009, 2011 through 2014 and most recently from June 2017 to August 2018. In September 2018, historic rainfalls and above-average rains in the fourth quarter contributed to an average LGR groundwater elevation of 1,133.18 feet MSL by December (101.62 feet above the 16-year long-term average). Below average rainfall in the third and fourth quarters of 2019 resulted in a 124.76-foot decline in water level elevation from June to December. Slightly below average rainfall during the first quarter of 2020 resulted in only a marginal decline in water level elevation since December 2019 (0.66-foot loss). In the second quarter, slightly below average rains resulted in a modest increase in aquifer water levels. Currently, the groundwater elevation is 0.60 feet below the long-term average of 1032.75 feet (now at 17.75 years).

It is worth noting that, based on more than 17.75 years of program history, the post wide LGR groundwater level has declined by 112.59 feet (see **Figure 2.4**). As can be expected with sparse data sets, the largest rate of change/decline (90 feet) came during the initial 4 years of the groundwater monitoring program. Over the past 10 years, the average decline rate has subdued, losing an additional 18.58 feet of average groundwater elevation. This 10-year period included 6 years of prolonged drought and four years of above average precipitation (2010, 2015, 2016, and 2018). The past 17.75-year history of CSSA groundwater monitoring indicates that the aquifer level is "below average" approximately 63.4 percent of the time. Over the last three years (12 monitoring events), the aquifer has been "below average" 58.3 percent of the time.

3.0 JUNE ANALYTICAL RESULTS

3.1 Monitoring Wells

Under the provisions of the groundwater monitoring DQOs and the 2015 LTMO evaluation, the schedule for sampling on-post in June 2020 included 4 wells. The 4 wells sampled included drinking water production wells: CS-1, CS-10, CS-12, and CS-13 (see **Table 3.1**). Two additional wells (CS-2 and CS-3) were added to the sampling event to assess whether CS-3 is a viable replacement for damaged well CS-4. In conjunction with the off-post monitoring initiative (under a separate report) the June 2020 groundwater sampling constituted a "quarterly" event as outlined in the 2015 LTMO schedule, which was implemented in December 2016.

All 4 wells scheduled for monitoring in June 2020 were sampled along with the two additional wells (CS-2 and CS-3). Additional samples were collected as part of the AOC-65 in-situ chemical oxidation (ISCO) and SWMU B-3 bioreactor Corrective Measures operations; these results will be documented in separate reports. **Tables 3.1** and **3.2** provide a sampling overview for June 2020 and the schedule under the LTMO recommendations. The wells listed in **Table 3.1** are sampled using dedicated low-flow gas-operated bladder pumps. Wells CS-1, CS-10, CS-12, and CS-13 were sampled using dedicated electric submersible pumps. Well CS-3 was sampled using a bailer, a low flow gas-operated bladder pump will be installed in the near future. **Figure 3.1** shows well sampling locations.

Wells sampled by low-flow pumps were purged until the field parameters of pH, temperature, and conductivity stabilized. The on-post monitoring wells were sampled in June 2020 for volatile organic compounds (VOCs) analytes which include *cis*-1,2-dichloroethene (*cis*-1,2-DCE), tetrachloroethene (PCE), trichloroethene (TCE), and vinyl chloride. Effective in September 2016 per the recently-approved DQOs, metals are no longer obtained from on-post monitoring wells. Metals analyses will continue to be collected from active groundwater remediation sites (AOC-65 and B-3), as well as on-post drinking water wells. As such, active drinking water wells CS-1, CS-10, CS-12, and CS-13 were analyzed for the same VOC analytes and metals (arsenic, barium, chromium, copper, zinc, cadmium, mercury, and lead).

Samples were analyzed by Agriculture & Priority Pollutant Laboratories (APPL) in Clovis, California. All detected concentrations of VOCs and metals are presented in **Table 3.3**. Full analytical results are presented in **Appendix B**.

No wells sampled this quarter had VOCs detected above the applicable Maximum Contaminant Levels (MCL). A comparison of VOC concentrations versus water level for select wells is presented in **Figure 3.2**. The overall trend for CS-D, CS-MW1-LGR, CS-MW5-LGR, CS-MW36-LGR last sampled in December 2019 was a slight increase in VOC concentrations with a significant decrease in groundwater elevation. CS-MW5-LGR has been sampled since 2001, but it did not show concentrations of PCE and TCE above the MCL until December 2015. PCE and TCE remained above the MCL through 2017 then dropped back below in 2018. TCE was detected above the MCL again in December 2019. This quarter the overall groundwater elevation in all wells indicates the depleted aquifer began a slight recovery from the average rainfall that fell in early 2020. Wells presented in **Figure 3.2** are sampled every 15 months according to the current LTMO, with the next scheduled event occurring in March 2021. It should be noted that well CS-4, depicted in Figure 3.2, is currently out of service. Attempts to rehabilitate this CS-4 were

unsuccessful and the well is scheduled for abandonment. Replacement options for this well are currently being evaluated.

Table 3-1 **Overview of On-Post Sampling for June 2020**

Count	Well ID	Analytes	Last Sample Date	Sep-19	Dec-19 (30 month)	Mar-20	Jun-20	LTMO Sampling Frequency*
	CS-MW1-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW1-BS	VOCs	Dec-12	NS	NS	NS	NS	as needed
	CS-MW1-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW2-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW2-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW3-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW4-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW5-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW6-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW6-BS	VOCs	Dec-12	NS	NS	NS	NS	as needed
	CS-MW6-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW7-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW7-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW8-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW8-CC	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW9-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW9-BS	VOCs	Dec-12	NS	NS	NS	NS	as needed
	CS-MW9-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW10-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW10-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW11A-LGR	VOCs	Dec-19	NS	Š	NS	NS	15 months
	CS-MW11B-LGR	VOCs	Sep-18	NS	NS dry	NS	NS	15 months
	CS-MW12-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW12-BS	VOCs	Dec-12	NS	NS	NS	NS	as needed
	CS-MW12-CC	VOCs	Dec-19	NS	S	NS	NS	30 months
	CW-MW17-LGR	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MW18-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW19-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
1	CS-1	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Mar-20	S	S	S	S	Quarterly
2	CS-2	VOCs	Dec-19	NS	S	NS	Added	30 months
3	CS-3	VOCs	Dee 17	NA	NA	NA	Added	Quarterly
5	CS-4	VOCs	Sep-18	NS	NS pump out	NS	NS	15 months
4	CS-10	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Mar-20	S	S	S	S	Quarterly
5	CS-12	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Mar-20	S	S	S	S	Quarterly
6	CS-12 CS-13	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Mar-20	S	S	S	S	Quarterly
	CS-D	VOCs	Dec-19	NS	S	NS	NS	15 months
	CS-MWG-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	30 months
	CS-MWH-LGR	VOCs	Jun-17	NS	NS pump out	NS	NS	30 months
	CS-I	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW20-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW21-LGR	VOCs	Dec-19	NS	S	NS	NS	30 months
	CS-MW21-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	30 months
	CS-MW23-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	30 months
	CS-MW23-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	30 months
	CS-MW25-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	30 months
	CS-MW25-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	15 months
	CS-MW35-LGR CS-MW36-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	15 months
	CS-MW30-LGR CS-MW37-LGR	VOCs	Dec-19 Dec-19	NS	S	NS	NS	15 months

 Notes/Abreviations:
 Notes/Abreviations:

 * New LTMO sampling frequency implemented September 2016. Metals analysis removed from monitoring wells and drinking water wells metals analysis remains the same.

 S = Sample

 NS = No Sample

J:\CSSA Program\Restoration\Groundwater\GW Monitoring Reports\2020\June

Table 3-2Overview of Westbay Sampling for June 2020

	Last					LTMO Sampling
	Sample		Dec-19 (30			Frequency (as of Sept.
Westbay Interval	Date	Sep-19	month)	Mar-20	Jun-20	2016)
CS-WB01-UGR-01	Sep-18	NS	S	NS	NS	15 months
CS-WB01-LGR-01	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-02	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-03	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-04	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-05	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-06	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-07	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-08	Dec-19	NS	S	NS	NS	15 months
CS-WB01-LGR-09	Dec-19	NS	S	NS	NS	15 months
CS-WB02-UGR-01	Dec-04	NS	Clogged	NS	NS	15 months
CS-WB02-LGR-01	Sep-18	NS	S	NS	NS	15 months
CS-WB02-LGR-02	Sep-18	NS	S	NS	NS	15 months
CS-WB02-LGR-03	Dec-19	NS	S	NS	NS	15 months
CS-WB02-LGR-04	Dec-19	NS	S	NS	NS	15 months
CS-WB02-LGR-05	Dec-19	NS	S	NS	NS	15 months
CS-WB02-LGR-06	Dec-19	NS	S	NS	NS	15 months
CS-WB02-LGR-07	Dec-19	NS	S	NS	NS	15 months
CS-WB02-LGR-08	Dec-19	NS	S	NS	NS	15 months
CS-WB02-LGR-09	Dec-19	NS	S	NS	NS	15 months
CS-WB03-UGR-01	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-01	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-02	Jun-16	NS	S	NS	NS	15 months
CS-WB03-LGR-03	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-04	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-05	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-06	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-07	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-08	Dec-19	NS	S	NS	NS	15 months
CS-WB03-LGR-09	Dec-19	NS	S	NS	NS	15 months
CS-WB04-UGR-01	Nov-04	NS	S	NS	NS	15 months
CS-WB04-LGR-01	Dec-19	NS	S	NS	NS	30 months
CS-WB04-LGR-02	Mar-10	NS	S	NS	NS	30 months
CS-WB04-LGR-03	Dec-19	NS	S	NS	NS	30 months
CS-WB04-LGR-04	Dec-19	NS	S	NS	NS	30 months
CS-WB04-LGR-06	Dec-19	NS	S	NS	NS	15 months
CS-WB04-LGR-07	Dec-19	NS	S	NS	NS	15 months
CS-WB04-LGR-08	Dec-19	NS	S	NS	NS	15 months
CS-WB04-LGR-09	Dec-19	NS	S	NS	NS	15 months
CS-WB04-LGR-10	Dec-19	NS	S	NS	NS	15 months
CS-WB04-LGR-11	Dec-19	NS	S	NS	NS	15 months
CS-WB04-BS-01	Dec-19	NS	S	NS	NS	30 months
CS-WB04-BS-02	Dec-19	NS	S	NS	NS	30 months
CS-WB04-CC-01	Dec-19	NS	S	NS	NS	30 months
CS-WB04-CC-02	Dec-19	NS	S	NS	NS	30 months
CS-WB04-CC-03	Dec-19	NS	S	NS	NS	30 months

Profiling performed quarterly, in conjunction with post wide water levels.

S = sample

NS = no sample

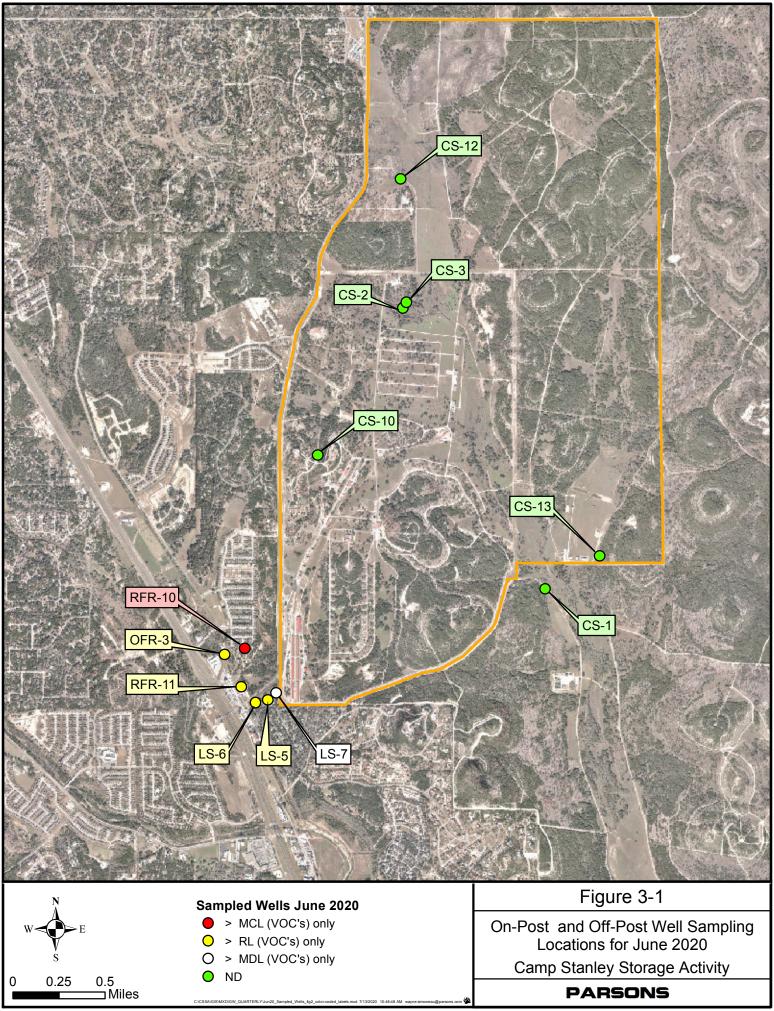


Table 3.3 June 2020 On-Post Quarterly Groundwater Results, Detected Analytes

Well ID	Sample Date	Arsenic	Barium	Cadmium	Chromium	Copper	Lead	Zinc	Mercury	
CSSA Drinking Water Well System										
CS-1	6/3/2020		0.0358					0.044F		
CS-1 FD	6/3/2020		0.0417			0.010		0.070		
CS-10	6/3/2020		0.0391			0.007F		0.377		
CS-12	6/3/2020		0.0302					0.204		
CS-13	6/3/2020	0.00055F	0.0367			0.004F		0.422		
Comparison Criteria										
Method Detection	n Limit (MDL)	0.00022	0.0003	0.0005	0.001	0.003	0.0019	0.008	0.0001	
Report	Reporting Limit (RL)		0.005	0.007	0.01	0.01	0.025	0.05	0.001	
Max. Contaminar	nt Level (MCL)	0.01	2	0.005	0.1	AL=1.3	AL=0.015	SS=5.0	0.002	

Well ID	Sample Date	cis-1,2- DCE	PCE	TCE	Vinyl Chloride				
CS-2	6/3/2020								
CS-3	6/3/2020								
	CSSA Drin	king Water	Well System						
CS-1	6/3/2020								
CS-1 FD	6/3/2020								
CS-10	6/3/2020								
CS-12	6/3/2020								
CS-13	6/3/2020								
Comparison Criteria									
Method Detection	on Limit (MDL)	0.07	0.06	0.05	0.08				
Repor	ting Limit (RL)	1.2	1.4	1	1.1				
Max. Contamina	nt Level (MCL)	70	5	5	2				

BOLD	≥MDL	Precipitation per Quarter:	Mar-20	Jun-20
BOLD	≥RL	AOC-65 Weather Station (AOC-65 WS)	5.07	8.23
BOLD	≥MCL	B-3 Weather Station (B-3 WS)	NA	11.09

All samples were analyzed by APPL, Inc.

VOC data reported in ug/L & metals data reported in mg/L.

Abbreviations/Notes	•
FD	Field Duplicate
FD TCE	Trichloroethene
PCE	Tetrachloroethene
PCE DCE	Dichloroethene
AL SS	Action Level
SS	Secondary Standard

Data Qualifiers:


--The analyte was analyzed for, but not detected. The associated numerical value is at or below the MDL.

F-The analyte was positively identified but the associated numerical value is below the RL.

J - Analyte detected, concentration estimated.

NA - data not available

Figure 3.2 On-Post Cumulative Analytical vs. Groundwater Elevation

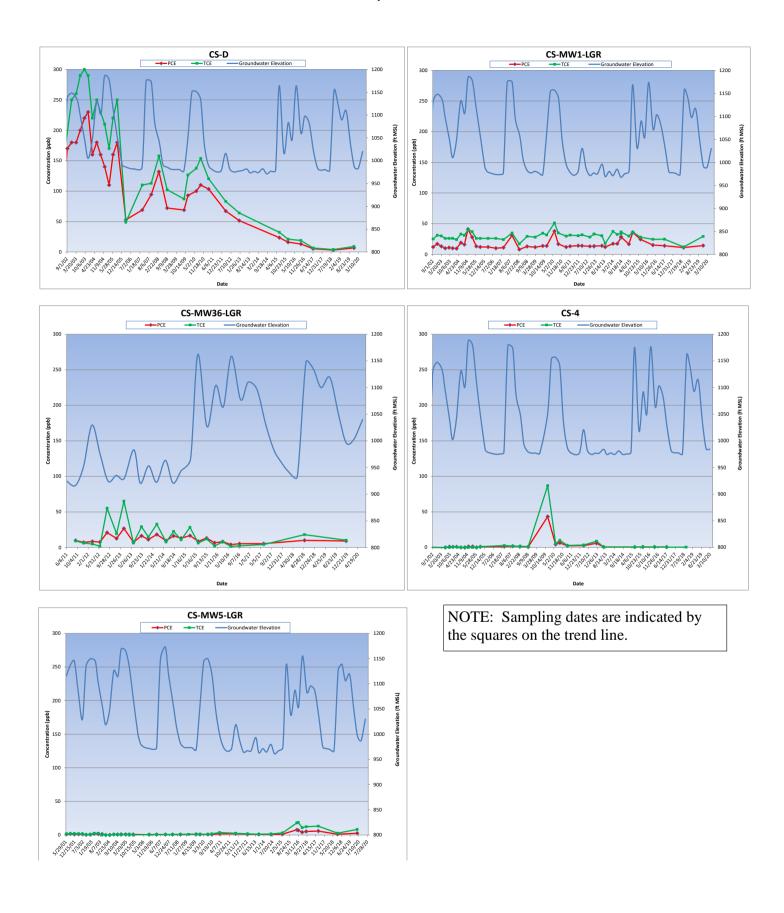

Results from on-post monitoring wells are considered definitive data and are subject to data validation and verification under provisions of the CSSA Quality Assurance Project Plan (QAPP). Parsons data package numbered CS12FF-#3 containing the analytical results from this sampling event, were received by Parsons June 29, 2020. Data validation was conducted, and data validation reports are presented in **Appendix D**.

3.2 Westbay-equipped Wells

The latest updated LTMO schedule was implemented in December 2016. In June 2020, no Westbay Well zones were scheduled for sampling. However, these wells (CS-WB01, CS-WB02, CS-WB03, and CS-WB04) were profiled to capture water level data. These Westbay wells are located in the vicinity of AOC-65 and are part of the post-wide quarterly groundwater monitoring program. Per the approved 2015 LTMO, the Upper Glen Rose (UGR)/LGR zones are to be sampled on a 15-month schedule and the BS/CC zones are sampled on a 30-month schedule. The sampling of these wells began in September 2003.

There are four other Westbay wells (CS-WB05, CS-WB06, CS-WB07, and CS-WB08) that are located at the SWMU B-3 remediation site. Those wells are sampled on a separate schedule in association with the SWMU B-3 bioreactor monitoring. Results for those wells are presented in the SWMU B-3 Performance Status Reports.

4.0 JUNE 2020 SUMMARY

- Groundwater samples were collected from 4 on-post wells scheduled for monitoring in June 2020 at CSSA. Two additional wells (CS-2 and CS-3) were added to determine if well CS-3 is a viable replacement for damaged well CS-4.
- From April 1st through June 30th, 2020, CSSA's AOC-65 weather station recorded 8.23 inches of rainfall and the SWMU B-3 weather station recorded 11.09 inches. Over half of the rainfall this quarter fell in May. The AOC-65 WS recorded 1.51 inches in April, 4.2 inches in May, and 2.52 inches in June. Three events had greater than one inch of daily rainfall during this period. The B-3 weather station recorded 1.82 inches in April, 7.36 inches in May, and 1.91 inches in June. This station also recorded 3 rain daily rain events greater than 1 inch.
- The Middle Trinity aquifer levels (LGR, BS, and CC) increased an average of 37.37 feet per non-pumping well since last quarter. The average water level in June 2020 (excluding pumping wells) was 210.59 feet BTOC (1037.29 feet MSL).
- No VOCs were detected above the MCL in wells sampled in June 2020. (Table 3.3).
- There were no metals detected above the MCL/AL/SS in the wells sampled in June 2020.
- Westbay Wells 01-04 were not sampled in June 2020 per LTMO sampling schedule. However, these wells were profiled to capture water level data in the area. These wells are scheduled to be sampled in March 2021.

APPENDIX A

EVALUATION OF DATA QUALITY OBJECTIVES ATTAINMENT

Activity	Objectives	Action	Objective Attained?	Recommendations
Field Sampling	Conduct field sampling in accordance with procedures defined in the project work plan, SAP, QAPP, HSP, and LTMO recommendations.	All sampling was conducted in accordance with the procedures described in the project plans.	Yes.	NA
Characterization	Prepare water-level contour and/or potentiometric maps for each formation of the Middle Trinity Aquifer (3.5.3).	Potentiometric surface maps were prepared based on water levels measured in each of CSSA's wells screened in three formations on June 12, 2020.	To the extent possible with data available. Due to the limited data available and the fact that wells are completed across multiple water-bearing units, potentiometric maps should only be used for regional water flow direction, not local. Ongoing pumping in the CSSA area likely affects the natural groundwater flow direction.	As additional wells are installed screened in distinct formations, future evaluations will eliminate reliance on wells screened across multiple formations.
of Environmental Setting (Hydrogeology)	Describe the flow system, including the vertical and horizontal components of flow (2.1.9).	Potentiometric maps were created using June 12, 2020 water level data, and horizontal flow direction was tentatively identified. Insufficient data are currently available to determine vertical component of flow.	As described above, due to the lack of aquifer-specific water level information, potentiometric surface maps should only be used as an estimate of regional flow direction.	Same as above.
	Define formation(s) in the Middle Trinity Aquifer are impacted by the VOC contaminants (2.1.3).	Quarterly groundwater monitoring provides information on Middle Trinity Aquifer impacts. Monitoring wells equipped with Westbay [®] - multi-port samplers are sampled every 15 or 30 months.	Yes.	Continue sampling.

Appendix A Evaluation of Data Quality Objectives Attainment

Activity	Objectives	Action	Objective Attained?	Recommendations
Characterization of Environmental Setting (Hydrogeology) (Continued)	Identify any temporal changes in hydraulic gradients due to seasonal influences (2.1.5).	Downloaded data from continuous-reading transducers in wells: CS-MW4-LGR, CS- MW9-LGR, CS-MW12-LGR, CS-MW12-CC, and CS-MW8-CC. Additional continuous reading transducers were added to the program through the SCADA project. The following wells can be uploaded to see real time water level data: CS-MW16-LGR, CS-MW16-CC, CS-1, CS-12, CS-13, and CS-10. Data was also downloaded from the AOC-65 and B-3 weather stations. Water levels will be graphed at these wells against precipitation data through December 2020 and included in the annual groundwater report.	Yes.	Continue collection of transducer data and possibly install transducers in other cluster wells.
	Characterize the horizontal and vertical extent of any immiscible or dissolved plume(s) originating from the Facility (3.1.2).	Samples for laboratory analysis were collected from all 4 CSSA drinking water wells and 2 monitoring wells. The 4 BS wells are sampled on an 'as needed' basis as part of the groundwater program.	The horizontal and vertical extent of groundwater contamination is continuously monitored.	Continue groundwater monitoring and construct additional wells as necessary.
Contamination Characterization (Ground Water Contamination)	Determine the horizontal and vertical concentration profiles of all constituents of concern (COC) in the groundwater that are measured by USEPA-approved procedures (3.1.2). COCs are those chemicals that have been detected in groundwater in the past and their daughter (breakdown) products.	Groundwater samples were collected from wells: CS-1, CS-2, CS-3, CS-10, CS-12, and CS-13. Samples were analyzed for the short list of VOCs using USEPA method SW8260B. The drinking water wells were also sampled for metals (arsenic, barium, chromium, copper, cadmium, mercury, lead, and zinc). Analyses were conducted in accordance with the CSSA QAPP and approved variances. All reporting limits (RL) were below MCLs, as listed below:	Yes.	Continue sampling.

Activity	Objectives		Action		Objective Attained?	Recommendations
	Determine the horizontal and vertical concentration profiles of all constituents of concern (COC) in the groundwater that are measured by USEPA-approved	ANALYTE cis-1,2-DCE PCE TCE Vinyl chloride	RL (μg /L) 1.2 1.4 1.0 1.1	MCL(μg/L) 70 5 5 2	Yes.	Continue sampling.
Contamination Characterization (Ground Water Contamination) (Continued)	procedures (3.1.2). COCs are those chemicals that have been detected in groundwater in the past and their daughter (breakdown) products.	ANALYTE Barium Chromium Copper Zinc Arsenic Cadmium Lead Mercury	RL (μg/L) 5 10 10 50 30 7 25 1	MCL/AL (μg /L) 2,000 100 1,300 5,000 10 5 15 2	Yes.	Continue sampling.
	Meet CSSA QAPP quality assurance requirements.		and approved v	cordance with the variances. Parsons	Yes.	NA
	requirements.	are usable for	characterizing	"J," "M," and "F" contamination. sidered unusable.	Yes.	NA

Activity	Objectives	Action	Objective Attained?	Recommendations
Contamination Characterization (Ground Water Contamination) (Continued)	Meet CSSA QAPP quality assurance requirements. (Continued)	Previously, a method detection limit (MDL) study for arsenic, cadmium, and lead was not performed within a year of the analyses, as required by the AFCEE QAPP.	The laboratory performed new MDL studies in February 2001 for these metals and the new MDL values were found to be almost identical to the previous MDLs and all met the associated AFCEE QAPP requirements. MDLs for these three metals are well below MCLs. In addition, the laboratory performed daily calibrations and RL verifications for these metals, both of which demonstrate the laboratory's ability to detect and quantitate these metals at RL levels. These daily analyses also indicate that concentrations above the laboratory RL for these compounds were not affected by the expired MDL study.	Use results for groundwater characterization purposes.
Remediation	Determine goals and create cost-effective and technologically appropriate methods for remediation (2.2.1).	Continued data collection will provide analytical results for accomplishing this objective.	Ongoing.	Continue sampling and evaluation, including quarterly groundwater monitoring teleconferences to address remediation.
	Determine placement of new wells for monitoring (2.3.1, 3.6)	Sampling frequency and sample locations to be monitored (including any new wells) will be based on trend data from monitoring event(s) (3.1.5).	Ongoing.	Continue quarterly groundwater teleconferences to discuss sampling frequency and placement of new monitor wells.
Project schedule/ Reporting	Produce a quarterly monitoring project schedule as a road map for sampling, analysis, validation, verification, reviews, and reports.	Prepare schedules and sampling guidelines prior to each quarterly sampling event.	Yes.	Continue sampling schedule preparation each quarter.

APPENDIX B

QUARTERLY ON-POST GROUNDWATER MONITORING ANALYTICAL RESULTS JUNE 2020

Appendix B Quarterly On-Post Groundwater Monitoring Analytical Results, June 2020

Well ID	Sample Date	Arsenic	Barium	Cadmium	Chromium	Copper	Lead	Zinc	Mercury
			CSSA Drin	king Water	Well System				
CS-1	6/3/2020	0.00022U	0.0358	0.0005U	0.0010U	0.003U	0.0019U	0.044F	0.0001U
CS-1 FD	6/3/2020	0.00022U	0.0417	0.0005U	0.0010U	0.010	0.0019U	0.070	0.0001U
CS-10	6/3/2020	0.00022U	0.0391	0.0005U	0.0010U	0.007F	0.0019U	0.377	0.0001U
CS-12	6/3/2020	0.00022U	0.0302	0.0005U	0.0010U	0.003U	0.0019U	0.204	0.0001U
CS-13	6/3/2020	0.00055F	0.0367	0.0005U	0.0010U	0.004F	0.0019U	0.422	0.0001U
			Cor	nparison Cri	teria				
Method Detection	n Limit (MDL)	0.00022	0.0003	0.0005	0.001	0.003	0.0019	0.008	0.0001
Report	ing Limit (RL)	0.03	0.005	0.007	0.01	0.01	0.025	0.05	0.001
Max. Contaminan	t Level (MCL)	0.01	2	0.005	0.1	AL=1.3	AL=0.015	SS=5.0	0.002

Well ID	Sample Date	cis-1,2- DCE	PCE	TCE	Vinyl Chloride
CS-2	6/3/2020	0.07U	0.06U	0.05U	0.08U
CS-3	6/3/2020	0.07U	0.06U	0.05U	0.08U
	CSSA Drin	king Water	Well System		
CS-1	6/3/2020	0.07U	0.06U	0.05U	0.08U
CS-1 FD	6/3/2020	0.07U	0.06U	0.05U	0.08U
CS-10	6/3/2020	0.07U	0.06U	0.05U	0.08U
CS-12	6/3/2020	0.07U	0.06U	0.05U	0.08U
CS-13	6/3/2020	0.07U	0.06U	0.05U	0.08U
	Con	nparison Cri	teria		
Method Detection	n Limit (MDL)	0.07	0.06	0.05	0.08
Report	ing Limit (RL)	1.2	1.4	1.0	1.1
Max. Contaminan	t Level (MCL)	70	5	5	2

BOLD	≥MDL
BOLD	\geq RL
BOLD	\geq MCL

All samples were analyzed by APPL, Inc.

VOC data reported	in ug/L & metals data reported in mg/L.
Abbreviations/Not	es:
FD TCE PCE	Field Duplicate
TCE	Trichloroethene
PCE	Tetrachloroethene

PCE Tetrachloroethe DCE Dichloroethene

Data Qualifiers:

F-The analyte was positively identified but the associated numerical value is below the RL.

J - Analyte detected, concentration estimated.

U-The analyte was analyzed for, but not detected. The associated numerical value is at or below the MDL.

NA - data not available

APPENDIX C

DATA VALIDATION REPORT SDG 92390

DATA VERIFICATION SUMMARY REPORT

for groundwater samples collected from

CAMP STANLEY STORAGE ACTIVITY

BOERNE, TEXAS

Data Verification by: Sandra de las Fuentes Parsons - Austin

INTRODUCTION

The following data verification summary report covers eight water samples collected from Camp Stanley Storage Activity (CSSA) June 3, 2020. The samples were assigned to the following Sample Delivery Group (SDG).

92390

The field QC sample associated with this SDG was one trip blank (TB), one matrix spike/matrix spike duplicate (MS/MSD) set, and one field duplicate (FD). No ambient blanks were collected. During the initiation of this project, it was determined that ambient blanks were not necessary due to the absence of a source at these sites.

All samples were collected by Parsons and analyzed by APPL, Inc. following the procedures outlined in the Statement of Work and CSSA QAPP, Version 1.0. Samples in this SDG were shipped to the laboratory in a single cooler, which was received by the laboratory at an acceptable temperature of 3.4°C.

Sample ID	Matrix	VOCs	Metals	Mercury	Comments
TB-1	Water	Х			Trip Blank
CS-2	Water	Х			
CS-3	Water	Х			
CS-12	Water	Х	Х	Х	MS/MSD
CS-13	Water	Х	Х	Х	
CS-1	Water	Х	Х	Х	
CS-1-FD	Water	Х	Х	Х	FD of CS-1
CS-10	Water	Х	Х	Х	

SAMPLE IDs AND REQUESTED PARAMETERS

EXTRACTION, ANALYTICAL, AND REPORTING DETAILS

|--|

Parameter	Matrix	Prep Method	Analytical Method	Units
VOC	WATER	SW5030B	SW8260B	μg/L
METALS	WATER	SW3010A	SW6010B	mg/L
MERCURY	WATER	SW7470A	SW7470A	mg/L

EVALUATION CRITERIA

The data submitted by the laboratory has been reviewed and verified following the guidelines outlined in the CSSA QAPP, Version 1.0. Information reviewed in the data package included sample results; field and laboratory quality control samples; calibrations; case narratives; raw data; chain-of-custody (COC) forms and the sample receipt checklist. The findings presented in this report are based on the reviewed information, and whether the guidelines in the CSSA QAPP, Version 1.0, were met.

VOLATILES

General

The volatiles portion of this data package consisted of six (6) groundwater samples, one (1) TB and one (1) FD. All samples were collected on June 3, 2020 and analyzed for a reduced list of VOCs which included: *cis*-1,2-dichloroethene (cis 1,2-DCE), tetrachloroethene, trichloroethene (TCE), and vinyl chloride.

The VOC analyses were performed using United States Environmental Protection Agency (USEPA) SW846 Method 8260B. The samples were analyzed in one analytical batch, #253391, under one initial calibration (ICAL). All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery (%R) obtained from the laboratory control sample (LCSs), MS/MSD, and the surrogate spikes. Sample CS-12 was designated as the MS/MSD on the COC.

All LCS, MS/MSD, and surrogate spike recoveries were within acceptance criteria.

Precision

Precision was evaluated using the relative percent difference (RPD) obtained from the MS/MSD results. Precision was further evaluated by comparing the field duplicate analyte results. Sample CS-1-FD was collected and analyzed as the field duplicate of CS-1.

The MS/MSD RPDs were within acceptance criteria.

All FD/parent sample results were non-detect; therefore, RPD could not be evaluated.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining laboratory blank and TB for cross contamination of samples during sample collection, transportation, and analysis.

All samples in this data package were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. All samples were prepared and analyzed within the holding time required by the method.

- All instrument performance check criteria were met.
- All initial calibration criteria were met.
- All initial calibration verification (ICV) criteria were met. The ICV was prepared using a secondary source standard.
- All continuing calibration verification (CCV) criteria were met.
- All internal standard criteria were met.

One method blank was associated with the VOC analyses in this SDG. The MB was non-detect for all target VOCs.

There was one trip blank sample associated with the VOC analyses in this SDG. The TB was also non-detect for all target VOCs.

Completeness

Completeness has been evaluated in accordance with the CSSA QAPP. The number of usable results has been divided by the number of possible individual analyte results and expressed as a percentage to determine the completeness of the data set.

All VOC results for the samples in this SDG were considered usable. The completeness for this SDG is 100%, which meets the minimum acceptance criteria of 95%.

ICP-AES METALS

General

The ICP-AES portion of this SDG consisted of four (4) groundwater samples and one (1) FD. All samples were collected on June 3, 2020. The samples were analyzed for arsenic, barium, cadmium, chromium, copper, lead, and zinc.

The ICP-AES metals analyses were performed using USEPA SW846 Method 6010B. All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method.

The samples for ICP-AES metals were digested in batch #253965. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery obtained from the LCS, MS, and MSD. Sample CS-12 was designated as the MS/MSD on the COC.

All LCS, MS, and MSD recoveries were within acceptance.

Precision

Precision was measured based on the RPD of MS/MSD results and parent/FD sample results. Sample CS-1-FD was collected and analyzed as the field duplicate of CS-1.

All RPDs were compliant for the MS/MSD.

All target metals were non-detected or below the reporting limit (RL) in the parent and FD samples except Barium which was within RPD criteria. Copper was detected at the RL in the FD and non-detect in the parent sample. Zinc was detected above the RL in the FD and below the RL in the parent.

Copper was qualified as estimated and flagged "UJ" and "J" in the parent and FD due to the variability. Zinc was not qualified since the FD result was less than 2x the RL.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating preservation and holding times; and
- Examining laboratory blank for cross contamination of samples during analysis.

All samples were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0, prepared and analyzed within the holding time required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The ICV was prepared using a secondary source.
- All CCV criteria were met.
- All interference check (ICSA/ICSAB) criteria were met.
- Dilution test (DT) was not applicable since all target metals met criteria in the MS/MSD.

- Post digestion spike (PDS) was also not applicable since all target metals met criteria in the MS/MSD samples.
- The initial calibration blank (ICB) and continuing calibration blank (CCB) samples were all non-detect.

One method blank was analyzed in association with the ICP-AES analyses in this SDG. The method blank was free of target metals at or above the RL.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

All ICP-AES metals results for the samples in this SDG were considered usable. The completeness for the ICP metals portion of this SDG is 100%, which meets the minimum acceptance criteria of 95%.

MERCURY

General

The mercury portion of this SDG consisted of four (4) groundwater samples and one (1) FD. All samples were collected on June 3, 2020 and were analyzed for mercury.

The mercury analyses were performed using USEPA SW846 Method 7470A. The sample was analyzed following the procedures outlined in the CSSA QAPP, prepared and analyzed within the holding time required by the method.

The mercury samples were prepared in batch #253784. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery obtained from the LCS and MS/MSD.

The LCS and MS/MSD recoveries were within acceptance criteria.

Precision

Precision was measured based on the RPD of MS/MSD results and parent/FD sample results. Sample CS-1-FD was collected and analyzed as the field duplicate of CS-1.

All RPDs were compliant for the MS/MSD.

The FD/parent sample results were non-detect; therefore, FD RPD could not be evaluated.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining laboratory blanks for cross contamination of samples during analysis.

All samples were analyzed following the COC and the analytical procedures described in the CSSA QAPP, prepared and analyzed within the holding times required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The ICV was prepared using a secondary source.
- All CCV criteria were met.

There was one method blank and several calibration blanks associated with the mercury analyses in this SDG. All blanks were free of mercury.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

Mercury result for the samples in this SDG was considered usable. The completeness for the mercury portion of this SDG is 100%, which meets the minimum acceptance criteria of 95%.