

JUNE 2017

On-Post

Quarterly Groundwater Monitoring Report



Prepared For

**Department of the Army
Camp Stanley Storage Activity
Boerne, Texas**

October 2017

EXECUTIVE SUMMARY

- Groundwater samples were collected from 43 on-post monitoring wells scheduled for sampling at Camp Stanley Storage Activity (CSSA) in June 2017.
- CSSA experienced below average precipitation volumes during the 2nd quarter of 2017 and the aquifer experienced a moderate decrease from March to June, 2017. The weather station (WS) at Area of Concern (AOC)-65 (AOC-65 WS) recorded 5.31 inches of rainfall from March to June, and the B-3 weather station (B-3 WS) recorded 6.86 inches of rainfall during this same timeframe. The average rainfall for this area from March to June is 10.63 inches.
- At CSSA, the Middle Trinity aquifers' average groundwater elevation in June 2017 decreased 62.97 feet from the elevations measured in March 2017. The average depth to water in the wells was 212.48 feet below top of casing (BTOC) or 1029.06 feet above mean sea level (MSL). As such, the Trinity-Glen Rose Groundwater Conservation District (TGRGCD) remains in Stage 1 Moderate Drought conditions since August 13, 2015. For the adjacent Edwards aquifer, the San Antonio Water System (SAWS) has moved to Stage 1 water restrictions implemented July 13, 2017.
- The maximum contaminant level (MCL) for VOCs was exceeded in wells CS-D, CS-MW1-LGR, CS-MW5-LGR, and CS-MW36-LGR, sampled in June 2017.
- No wells sampled had metal detections above their corresponding MCL, action level (AL), or secondary standard (SS) in June 2017.
- Of the 46 Westbay zones scheduled for sampling 6 zones (WB01-UGR-01, WB02-LGR-01 and -02, WB03-LGR-02, WB04-UGR-01 and -LGR-02) were dry and 1 zone (WB02-UGR-01) has a clogged sample port. Eleven zones had PCE and/or TCE above the MCL, 17 zones above the RL, and 7 zones above the MDL. Four of the 39 zones sampled were non-detect.
- All samples collected in June 2017 were in accordance with the 2015 long term monitoring optimization (LTMO) report that has been approved by the TCEQ and USEPA.


GEOSCIENTIST CERTIFICATION


JUNE 2017 ON-POST QUARTERLY GROUNDWATER MONITORING REPORT

FOR

**DEPARTMENT OF THE ARMY
CAMP STANLEY STORAGE ACTIVITY
BOERNE, TEXAS**

I, Adrien Lindley, Professional Geologist (P.G.), hereby certify that the June 2017 On-Post Quarterly Groundwater Monitoring Report for the Camp Stanley Storage Activity installation in Boerne, Texas accurately represents the site conditions of the subject area. This certification is limited only to geoscientific products contained in the subject report and is made on the basis of written and oral information provided by the CSSA Environmental Office, laboratory data provided by APPL Laboratories, and field data obtained during groundwater monitoring conducted at the site in June 2017, and is true and accurate to the best of my knowledge and belief.





Adrien Lindley, P.G.
State of Texas
Geology License No. 10487

10-17-17

Date

TABLE OF CONTENTS

EXECUTIVE SUMMARY	ii
GEOSCIENTIST CERTIFICATION.....	iii
APPENDICES	iv
LIST OF TABLES	v
LIST OF FIGURES	v
ACRONYMS AND ABBREVIATIONS.....	vi
1.0 INTRODUCTION.....	1-1
2.0 POST-WIDE FLOW DIRECTION AND GRADIENT	2-1
3.0 JUNE ANALYTICAL RESULTS	3-1
3.1 Monitoring Wells	3-1
3.2 Westbay-equipped Wells	3-7
4.0 JUNE 2017 SUMMARY.....	4-1

APPENDICES

Appendix A	Evaluation of Data Quality Objectives Attainment
Appendix B	Quarterly On-Post Groundwater Monitoring Analytical Results, June 2017
Appendix C	Westbay Analytical Results, June 2017
Appendix D	Data Validation Report

LIST OF TABLES

Table 2.1 Measured Groundwater Elevations – June 2017 2-2
Table 2.2 Changes in Groundwater Elevation from Previous Quarter – June 2017 2-3
Table 3.1 Overview of the On-Post Monitoring Program 3-2
Table 3.2 Overview of the On-Post Monitoring Program (Westbay)..... 3-3
Table 3.3 June 2017 On-Post Quarterly Groundwater Results, Detected Analytes 3-5
Table 3.4 June 2017 Westbay Analytical Results, Detected Analytes

LIST OF FIGURES

Figure 2.1 June 2017 Potentiometric Surface Map, LGR Wells Only 2-4
Figure 2.2 June 2017 Potentiometric Surface Map, BS Wells Only 2-5
Figure 2.3 June 2017 Potentiometric Surface Map, CC Wells Only 2-6
Figure 2.4 Average LGR Groundwater Elevations and Quarterly Precipitation 2-7
Figure 3.1 On-Post & Off-Post Well Sampling Locations for June 2017..... 3-4
Figure 3.2 Cumulative VOC Concentrations vs. Groundwater Elevation 3-6

ACRONYMS AND ABBREVIATIONS

µg/L	microgram per liter
§3008(h) Order	RCRA 3008(h) Administrative Order on Consent
AL	Action Level
AOC	Area of Concern
APPL	Agriculture and Priority Pollutants Laboratories, Inc.
BS	Bexar Shale
BTOC	below top of casing
CC	Cow Creek
<i>cis</i> -1,2-DCE	<i>cis</i> -1,2-Dichloroethene
COC	constituents of concern
CSSA	Camp Stanley Storage Activity
DQO	Data Quality Objectives
HSP	Health and Safety Plan
ISCO	In-Situ Chemical Oxidation
LGR	Lower Glen Rose
LTMO	Long-Term Monitoring Optimization
MCL	Maximum Contaminant Level
MDL	Method Detection Limit
MSL	mean sea level
NA	Not Available
PCE	Tetrachloroethene
P.G.	Professional Geologist
Parsons	Parsons Government Services, Inc.
QAPP	Quality Assurance Project Plan
RCRA	Resource Conservation and Recovery Act
RL	Reporting Limit
SAP	Sampling and Analysis Plan
SAWS	San Antonio Water System
SS	Secondary Standard
SWMU	Solid Waste Management Units
TCE	Trichloroethene
TCEQ	Texas Commission on Environmental Quality
TGRGCD	Trinity-Glen Rose Groundwater Conservation District
<i>trans</i> -1,2-DCE	<i>trans</i> -1,2-Dichloroethene
UGR	Upper Glen Rose
USEPA	United States Environmental Protection Agency
VOC	Volatile Organic Compound
WS	Weather Station

JUNE 2017 GROUNDWATER MONITORING REPORT CAMP STANLEY STORAGE ACTIVITY, TEXAS

1.0 INTRODUCTION

This report presents results from the on-post quarterly sampling performed at Camp Stanley Storage Activity (CSSA) in June 2017. Laboratory analytical results are presented along with potentiometric contour maps. Results from all four 2017 quarterly monitoring events (March, June, September, and December) will be described in detail in the 2017 Annual Report. The Annual Report will also provide an interpretation of all analytical results and an evaluation of any temporal or spatial trends observed in the groundwater contaminant plume during investigations. For this specific quarter, groundwater monitoring was performed June 8 through July 12, 2017 by Parsons Government Services, Inc. (Parsons).

Current objectives of the groundwater monitoring program are to determine groundwater flow direction and elevations, determine groundwater contaminant concentrations for characterization purposes, and identify meteorological and seasonal variations in physical and chemical properties. **Appendix A** identifies the data quality objectives (DQOs) for CSSA's groundwater monitoring program, along with an evaluation of whether each DQO was attained. The objectives listed in **Appendix A** also reference appropriate sections of the Resource Conservation and Recovery Act (RCRA) §3008(h) **Administrative Order on Consent** [§3008(h) Order].

The CSSA groundwater monitoring program follows the provisions of the groundwater monitoring program DQOs as well as the recommendations of the **Three-Tiered Long Term Monitoring Network Optimization (LTMO) Evaluation (Parsons, 2015)** which provided recommendations for sampling based on an LTMO study performed for the CSSA groundwater monitoring program. The LTMO evaluation was updated in 2015 using groundwater data from monitoring conducted between 2010 and 2015. The proposed LTMO changes/updates were approved by the TCEQ and USEPA April 22 and May 5, 2016, respectively. These changes were briefed to the public in the 2016 Annual Fact Sheet. The updated LTMO study sampling frequencies were implemented in December 2016.

2.0 POST-WIDE FLOW DIRECTION AND GRADIENT

After above average rainfall in 2016 followed by continued steady rain events in early 2017, the rainfall began to taper off in May 2017. The San Antonio Water System (SAWS) restrictions moved from 'year-round watering hours' to 'Stage 1' on July 13, 2017. The Trinity-Glen Rose Groundwater Conservation District (TGRGCD) remains in Stage 1 water restrictions since August 13, 2015.

The 30-year precipitation normal for the San Antonio area is 10.63 inches of rainfall for the three-month period of April through June. Over the 3-month period of record, the weather station (WS) at B-3 (B-3 WS), recorded 6.86 inches of rainfall (3.12 inches in April, 2.91 inches in May, and 0.83 inches in June). One day in April and 1 days in May had daily rainfall totals in excess of 1 inch at B-3. The Area of Concern (AOC-65) weather station (AOC-65 WS) recorded 5.31 inches of rainfall during the same period (2.41 inches in April, 2.61 inches in May, 0.29 inches in June). One day in May had a daily rainfall total of more than 1 inch.

Fifty-six water level measurements were recorded on June 30, 2017 from on- and off-post monitoring wells completed in the Lower Glen Rose (LGR), Bexar Shale (BS), and Cow Creek (CC) formational members of the Middle Trinity Aquifer (**Tables 2.1 and 2.2**). The groundwater potentiometric surface maps illustrating groundwater elevations from the LGR, BS, and CC zones in June 2017 are shown in **Figures 2.1, 2.2, and 2.3**, respectively.

The June 2017 potentiometric surface map for LGR-screened wells (**Figure 2.1**) exhibited a wide range of groundwater elevations, from a minimum of 967.06 feet above mean sea level (MSL) at B3-EXW05 to a maximum of 1078.22 feet above MSL at CS-MW4-LGR. Groundwater elevations are generally higher in the northern and central portions of CSSA, and decrease to the southwest and southeast. As measured in all non-pumping wells, the average groundwater elevation in June 2017 decreased 64.38 feet from the elevations measured in March 2017 to 1028.54 feet. This is 4.28 feet below the 14.5-year average groundwater elevation for the area (1032.82 feet) (**Figure 2.4**).

Well CS-MW4-LGR, located in the central portion of CSSA, typically has one of the highest groundwater elevations of LGR-screened wells. Under average and above-average aquifer elevations, the groundwater level is 20 to 30 feet higher than the nearest comparable wells (CS-MW2-LGR and CS-MW5-LGR), creating a pronounced groundwater mound in the central portion of the facility. In June 2017, this mounding effect was observable as the elevation in CS-MW4-LGR was approximately 42 feet higher than CS-MW2-LGR and 45 feet higher than CS-MW5-LGR. Long-term monitoring has ascertained that when groundwater in the vicinity of CS-MW4-LGR rises above about 970 feet MSL, the mounding effect is evident. As measured in June 2017, the water elevation at CS-MW4-LGR was 1078.22 feet MSL, and the typical mounding effect was evident.

**Table 2.1
Measured Groundwater Elevation
June 2017**

Well ID:	TOC elevation (ft MSL)	Depth to Groundwater (ft BTOC)	Groundwater Elevation (ft MSL)	Formations Screened			Date
				LGR	BS	CC	
CS-1	1169.27	151.60	1017.67	ALL			6/30/2017
CS-2	1237.59	219.16	1018.43	X	?		6/30/2017
CS-3	1240.17	218.17	1022.00	X			6/30/2017
CS-4	1229.28	206.67	1022.61	X			6/30/2017
CS-10	1331.51	309.20	1022.31	ALL			6/30/2017
CS-12	1274.09	259.00	1015.09	ALL			6/30/2017
CS-13	1193.26	169.83	1023.43	ALL			6/30/2017
CS-D	1236.03	216.32	1019.71	X			6/30/2017
CS-MWG-LGR	1328.14	286.55	1041.59	X			6/30/2017
CS-MWH-LGR	1319.19	295.05	1024.14	X			6/30/2017
CS-I	1315.20	275.30	1039.90	X			6/30/2017
CS-MW1-LGR	1220.73	188.96	1031.77	X			6/30/2017
CS-MW1-BS	1221.09	181.47	1039.62		X		6/30/2017
CS-MW1-CC	1221.39	198.27	1023.12			X	6/30/2017
CS-MW2-LGR	1237.08	201.18	1035.90	X			6/30/2017
CS-MW2-CC	1240.11	209.99	1030.12			X	6/30/2017
CS-MW3-LGR	1334.14	305.58	1028.56	X			6/30/2017
CS-MW4-LGR	1209.71	131.49	1078.22	X			6/30/2017
CS-MW5-LGR	1340.24	306.98	1033.26	X			6/30/2017
CS-MW6-LGR	1232.25	201.16	1031.09	X			6/30/2017
CS-MW6-BS	1232.67	156.71	1075.96		X		6/30/2017
CS-MW6-CC	1233.21	203.02	1030.19			X	6/30/2017
CS-MW7-LGR	1202.27	176.72	1025.55	X			6/30/2017
CS-MW7-CC	1201.84	176.82	1025.02			X	6/30/2017
CS-MW8-LGR	1208.35	178.80	1029.55	X			6/30/2017
CS-MW8-CC	1206.13	179.93	1026.20			X	6/30/2017
CS-MW9-LGR	1257.27	236.55	1020.72	X			6/30/2017
CS-MW9-BS	1256.73	224.03	1032.70		X		6/30/2017
CS-MW9-CC	1255.95	234.41	1021.54			X	6/30/2017
CS-MW10-LGR	1189.53	179.76	1009.77	X			6/30/2017
CS-MW10-CC	1190.04	175.18	1014.86			X	6/30/2017
CS-MW11A-LGR	1204.03	188.93	1015.10	X			6/30/2017
CS-MW11B-LGR	1203.52	191.11	1012.41	X			6/30/2017
CS-MW12-LGR	1259.07	233.42	1025.65	X			6/30/2017
CS-MW12-BS	1258.37	211.95	1046.42		X		6/30/2017
CS-MW12-CC	1257.31	233.66	1023.65			X	6/30/2017
CS-MW16-LGR	1244.60	225.40	1019.20	X			6/30/2017
CS-MW16-CC	1244.51	233.80	1010.71			X	6/30/2017
B3-EXW01	1245.26	232.60	1012.66	X			6/30/2017
B3-EXW02	1249.66	227.60	1022.06	X			6/30/2017
B3-EXW03	1235.11	210.71	1024.40	X			6/30/2017
B3-EXW04	1228.46	201.00	1027.46	X			6/30/2017
B3-EXW05*	1279.46	312.40	967.06	X			6/30/2017
CS-MW17-LGR	1257.01	228.26	1028.75	X			6/30/2017
CS-MW18-LGR	1283.61	259.87	1023.74	X			6/30/2017
CS-MW19-LGR	1255.53	216.44	1039.09	X			6/30/2017
CS-MW20-LGR	1209.42	164.73	1044.69	X			6/30/2017
CS-MW21-LGR	1184.53	154.12	1030.41	X			6/30/2017
CS-MW22-LGR	1280.49	256.32	1024.17	X			6/30/2017
CS-MW23-LGR	1258.20	236.88	1021.32	X			6/30/2017
CS-MW24-LGR	1253.90	234.48	1019.42	X			6/30/2017
CS-MW25-LGR	1293.01	266.70	1026.31	X			6/30/2017
CS-MW35-LGR	1186.97	170.68	1016.29	X			6/30/2017
CS-MW36-LGR	1218.74	187.88	1030.86	X			6/30/2017
CS-MW37-LGR	NA	184.37	NA	X			6/30/2017
FO-20	1327.00	282.93	1044.07		ALL		6/30/2017
Number of wells screened in each formation.				37	4	9	
Average groundwater elevation in each formation given in feet (non pumping wells).				1028.02	1048.68	1024.34	
Notes:							
Bold wells: CS-2, CS-10, CS-12, CS-13, and FO-20 are open boreholes across more than one formational unit.							
? = Exact screening information unknown for this well.							
Shaded wells are routinely pumped for either domestic, livestock, or environmental remediation purposes, and therefore are not used in calculating statistics.							
CS-1, CS-10, CS-12, and CS-13 are current or future drinking water wells.							
CS-MW16-LGR, CS-MW16-CC, B3-EXW01 through B3-EXW05 pumps are cycling continuously to feed the B-3 Bioreactor.							
* = submersible pump running at time of water level measurement.							
Formational average groundwater elevation is calculated from non-pumping wells screened in only one formation.							
All measurements given in feet.							
NA = Data not available							

Table 2.2
Change in Groundwater Elevation from Previous Quarter
June 2017

Well ID	Mar. 2017 Elevations	June 2017 Elevations	GW elevation change (Mar. minus Dec.)	Formations Screened		
				LGR	BS	CC
CS-1	1044.97	1017.67	-27.30	ALL		
CS-2	1085.93	1018.43	-67.50	X	?	
CS-3	1086.24	1022.00	-64.24	X		
CS-4	1083.11	1022.61	-60.50	X		
CS-10*	1217.90	1022.31	-195.59	ALL		
CS-12	1088.99	1015.09	-73.90	ALL		
CS-13	1076.39	1023.43	-52.96	ALL		
CS-D	1082.65	1019.71	-62.94	X		
CS-MWG-LGR	1107.03	1041.59	-65.44	X		
CS-MWH-LGR	1103.37	1024.14	-79.23	X		
CS-I	1101.25	1039.90	-61.35	X		
CS-MW1-LGR	1081.55	1031.77	-49.78	X		
CS-MW1-BS	1085.15	1039.62	-45.53		X	
CS-MW1-CC	1077.84	1023.12	-54.72			X
CS-MW2-LGR	1083.57	1035.90	-47.67	X		
CS-MW2-CC	1075.66	1030.12	-45.54			X
CS-MW3-LGR	1088.99	1028.56	-60.43	X		
CS-MW4-LGR	1146.56	1078.22	-68.34	X		
CS-MW5-LGR	1087.04	1033.26	-53.78	X		
CS-MW6-LGR	1097.49	1031.09	-66.40	X		
CS-MW6-BS	1104.44	1075.96	-28.48		X	
CS-MW6-CC	1098.01	1030.19	-67.82			X
CS-MW7-LGR	1090.77	1025.55	-65.22	X		
CS-MW7-CC	1094.04	1025.02	-69.02			X
CS-MW8-LGR	1095.42	1029.55	-65.87	X		
CS-MW8-CC	1095.08	1026.20	-68.88			X
CS-MW9-LGR	1091.27	1020.72	-70.55	X		
CS-MW9-BS	1104.42	1032.7	-71.72		X	
CS-MW9-CC	1091.13	1021.54	-69.59			X
CS-MW10-LGR	1086.63	1009.77	-76.86	X		
CS-MW10-CC	1083.04	1014.86	-68.18			X
CS-MW11A-LGR	1075.45	1015.10	-60.35	X		
CS-MW11B-LGR	1073.05	1012.41	-60.64	X		
CS-MW12-LGR	1092.49	1025.65	-66.84	X		
CS-MW12-BS	1108.31	1046.42	-61.89		X	
CS-MW12-CC	1089.87	1023.65	-66.22			X
CS-MW16-LGR	1083.31	1019.20	-64.11	X		
CS-MW16-CC*	972.05	1010.71	38.66			X
B3-EXW01*	934.75	1012.66	77.91	X		
B3-EXW02*	971.08	1022.06	50.98	X		
B3-EXW03	1085.71	1024.40	-61.31	X		
B3-EXW04*	951.12	1027.46	76.34	X		
B3-EXW05*	1076.23	967.06	-109.17	X		
CS-MW17-LGR	1090.51	1028.75	-61.76	X		
CS-MW18-LGR	1094.03	1023.74	-70.29	X		
CS-MW19-LGR	1105.22	1039.09	-66.13	X		
CS-MW20-LGR	1110.42	1044.69	-65.73	X		
CS-MW21-LGR	1085.43	1030.41	-55.02	X		
CS-MW22-LGR	1089.97	1024.17	-65.80	X		
CS-MW23-LGR	1085.81	1021.32	-64.49	X		
CS-MW24-LGR	1086.46	1019.42	-67.04	X		
CS-MW25-LGR	1089.59	1026.31	-63.28	X		
CS-MW35-LGR	1085.12	1016.29	-68.83	X		
CS-MW36-LGR	1096.55	1030.86	-65.69	X		
CS-MW37-LGR	NA	NA	NA	X		
FO-20	1107.63	1044.07	-63.56	ALL		
Average groundwater elevation change (all wells minus pumping wells)			-62.97			
Average groundwater elevation change in each formation (non pumping wells)				-64.34	-51.91	-63.75
Notes:						
Bold wells: CS-2, CS-10, CS-12, CS-13, and FO-20 are open boreholes across more than one formational unit.						
? = Exact screening information unknown for this well.						
Shaded wells are routinely pumped for either domestic, livestock, or environmental remediation purposes, and therefore are not used in calculating statistics.						
CS-1, CS-9, CS-10, CS-12, and CS-13 are current, inactive, or future drinking water wells.						
CS-MW16-LGR, CS-MW16-CC, B3-EXW01 through B3-EXW05 pumps are cycling continuously to feed the B-3 Bioreactor.						
* = submersible pump running at time of water level measurement.						
Formational average groundwater elevation change is calculated from non-pumping wells screened in only one formation.						
All measurements given in feet.						
NA = Data not available						




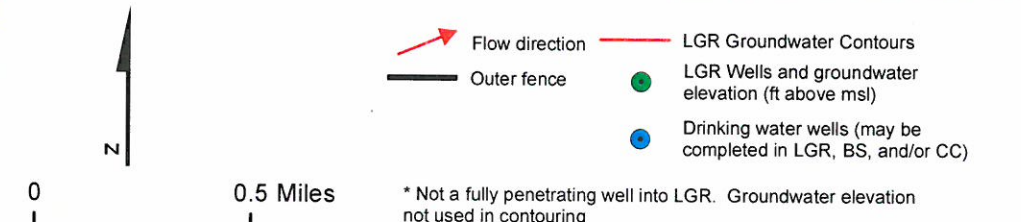


Figure 2.1
 June 2017 Potentiometric Surface Map, LGR Wells
 Camp Stanley Storage Activity
PARSONS

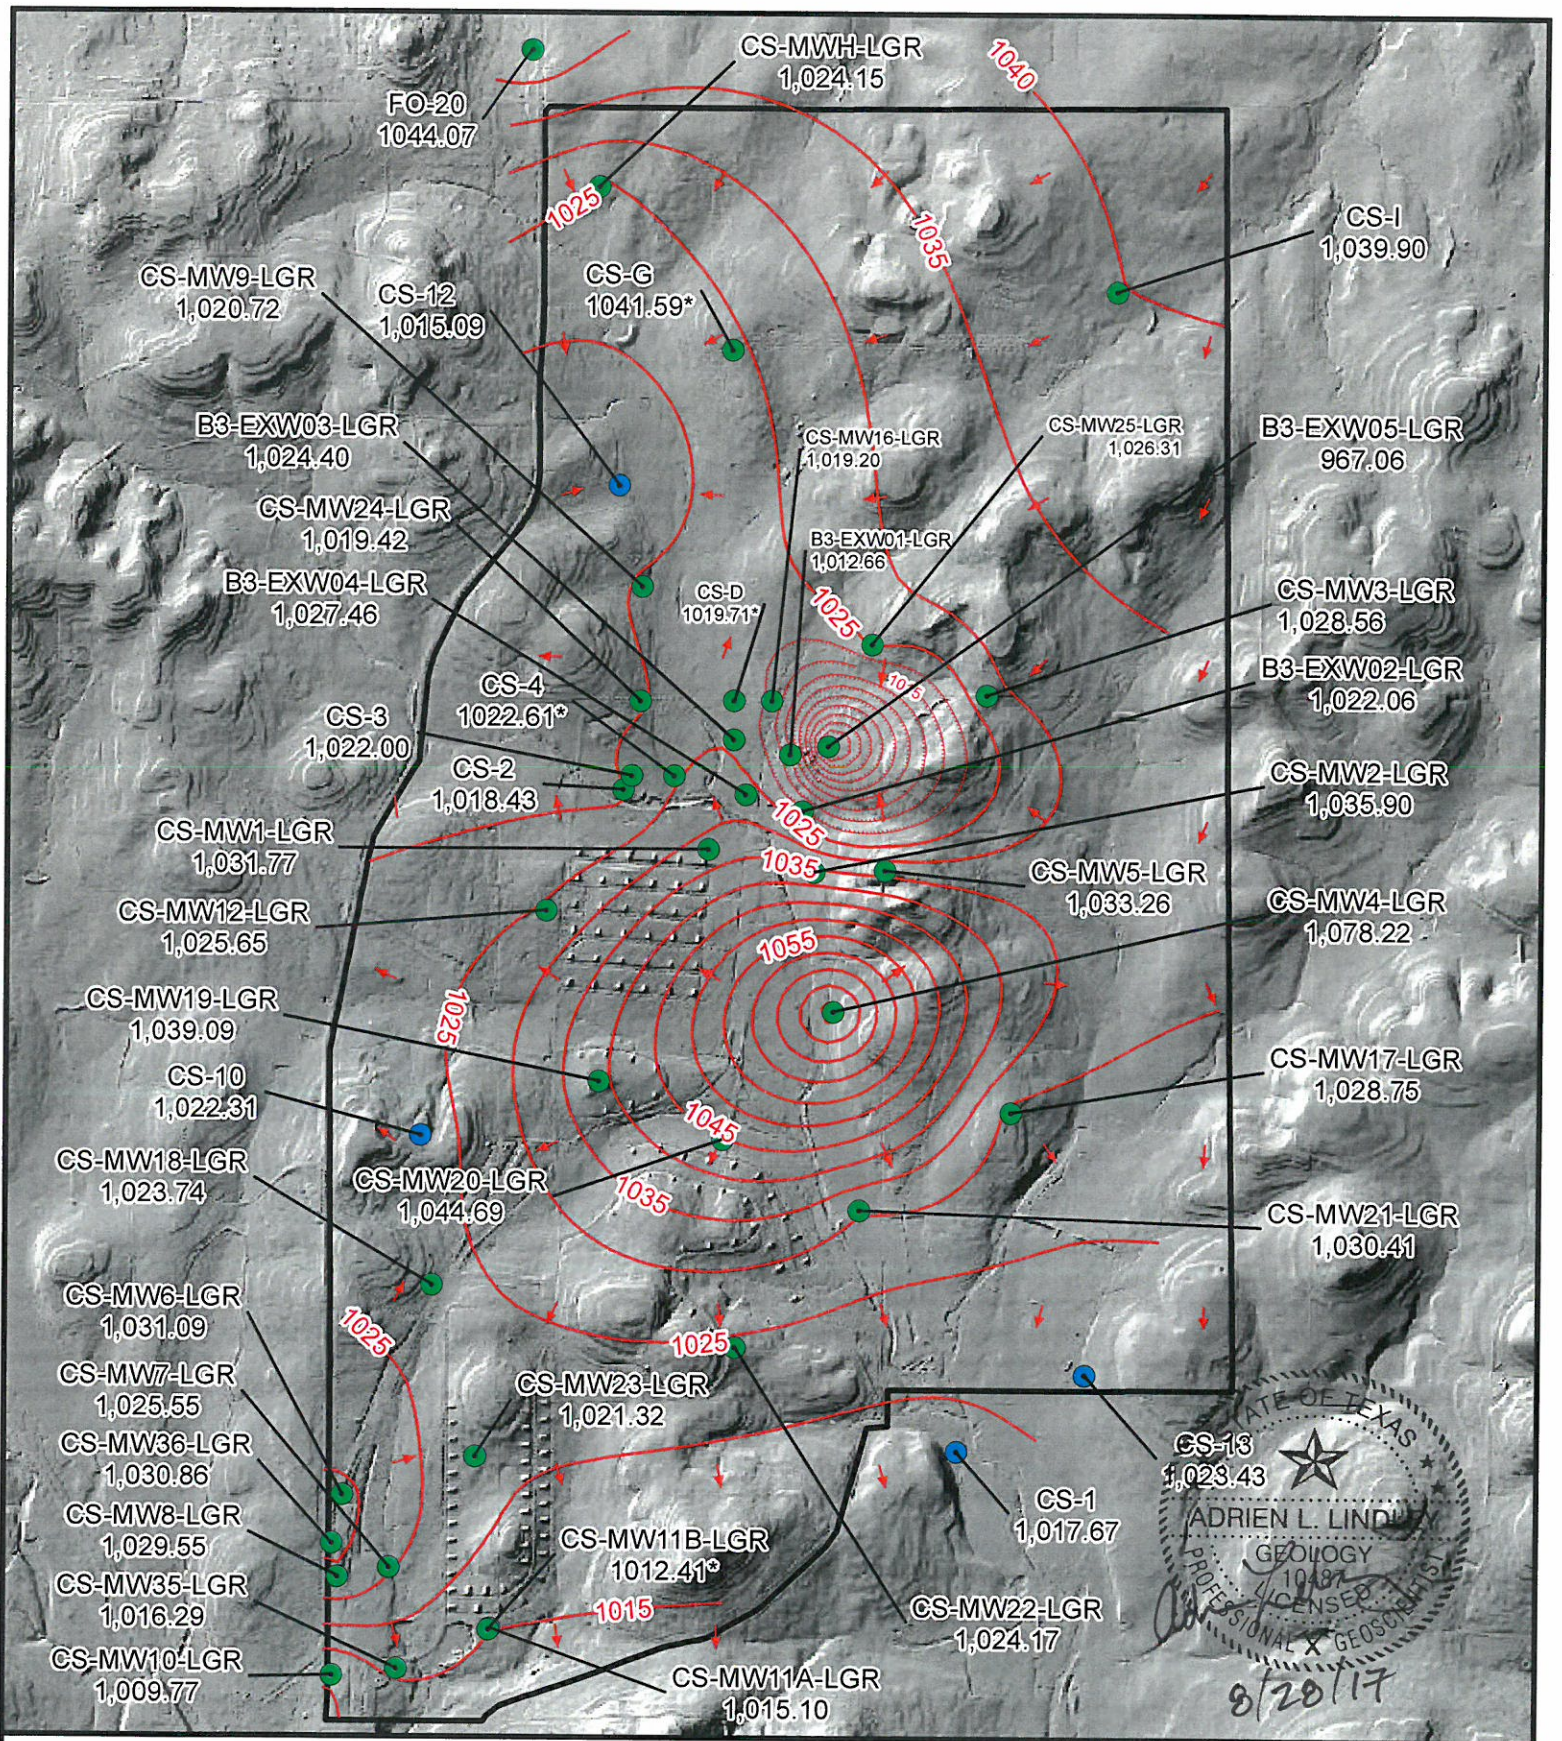
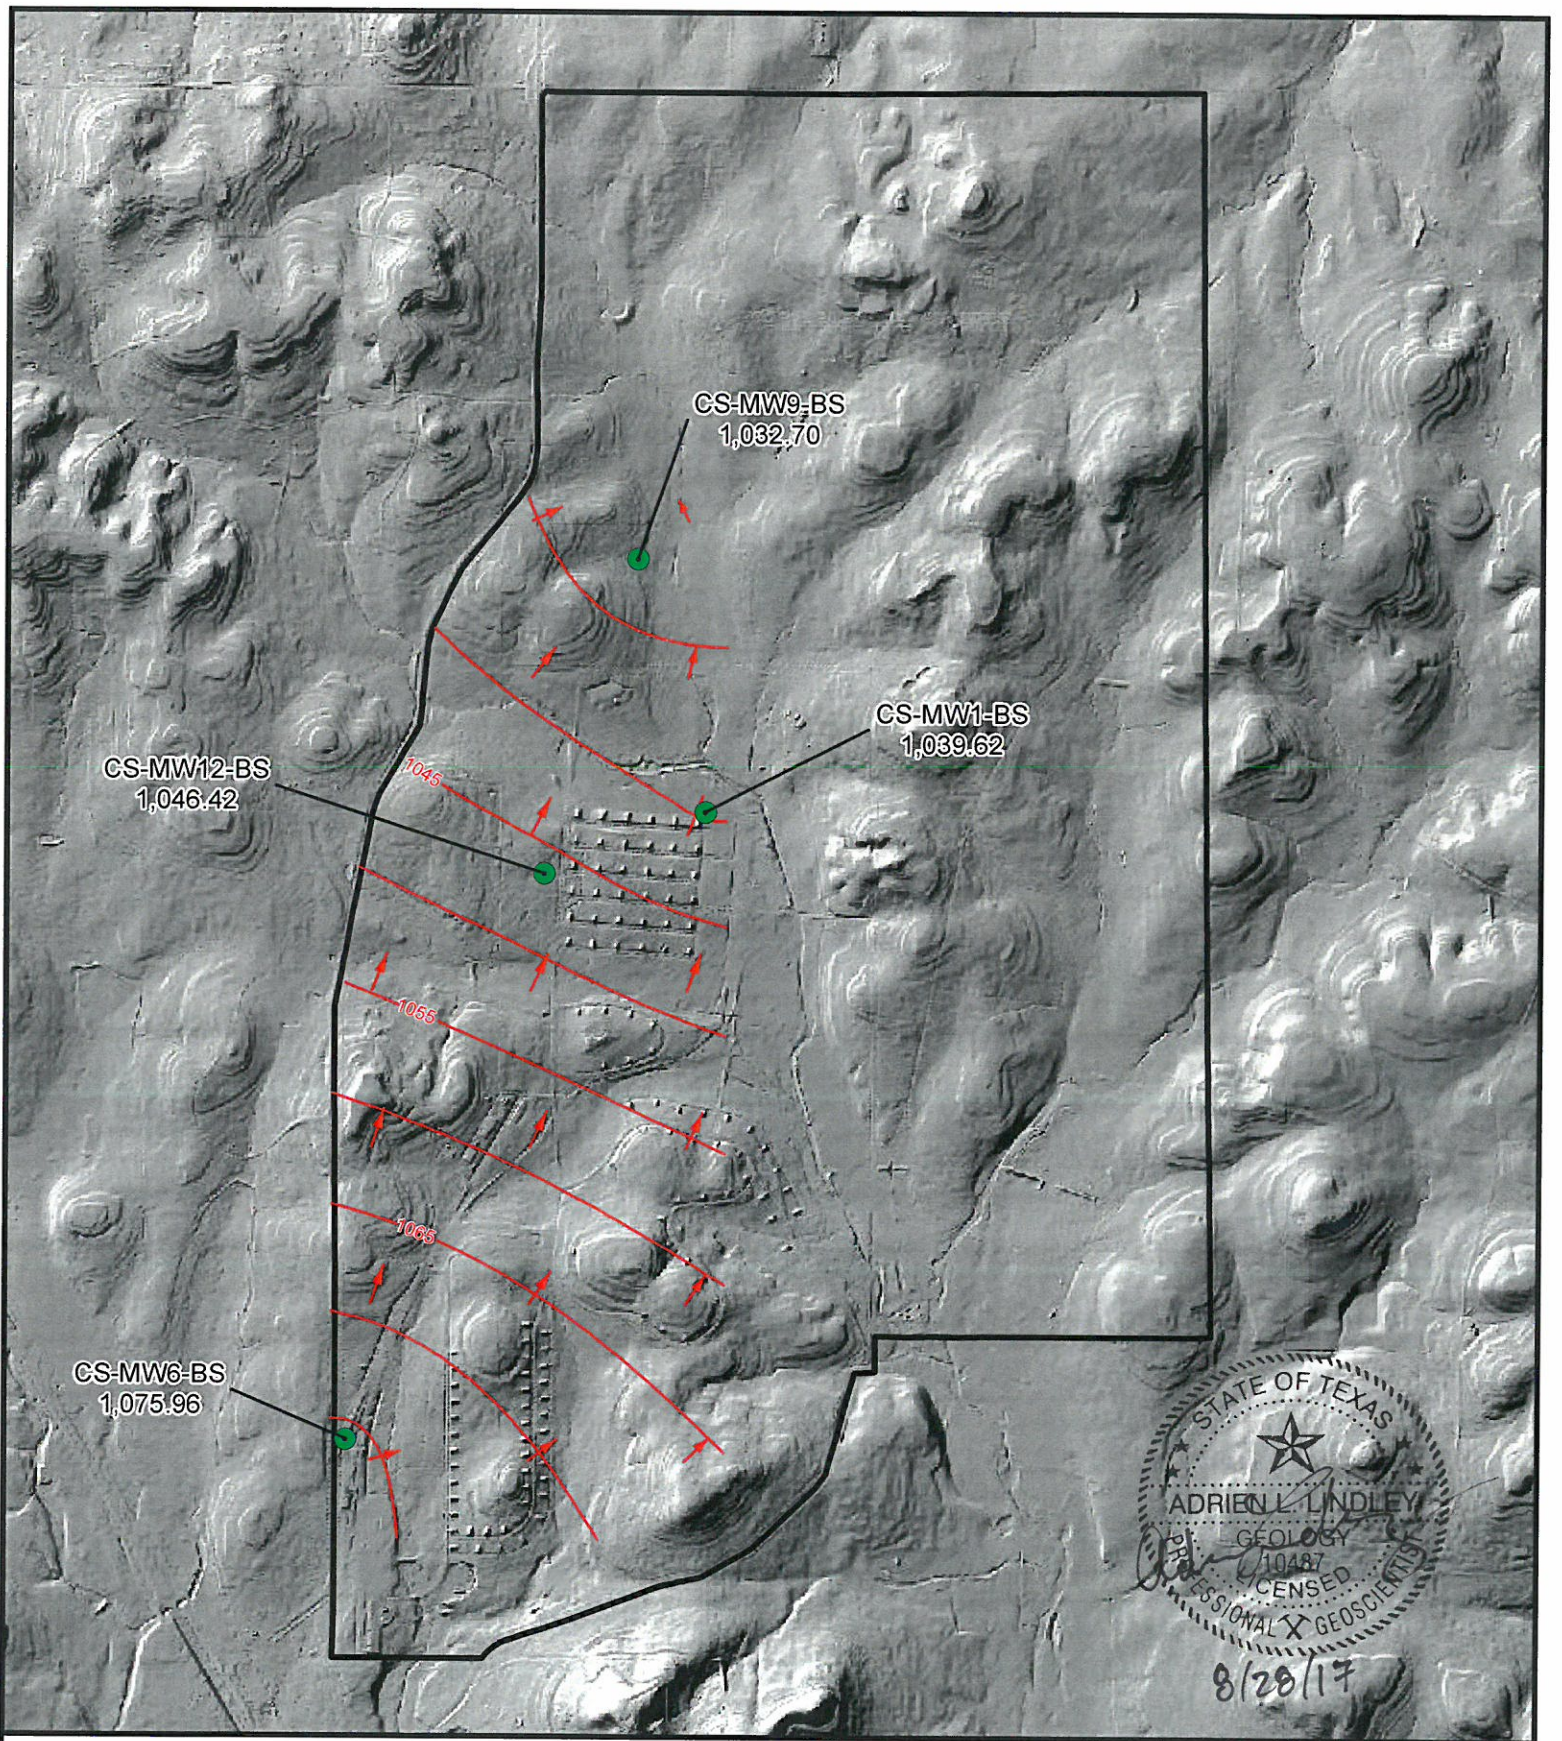


STATE OF TEXAS
 ADRIEN LINDLEY
 GEOLOGY
 10487
 LICENSED
 PROFESSIONAL GEOSCIENTIST
 8/28/17



- Flow direction
- Outer fence
- BS Groundwater Contours
- BS Wells and groundwater elevation (ft above msl)

Figure 2-2
 June 2017 Potentiometric
 Surface Map, BS Wells
 Camp Stanley Storage Activity
PARSONS

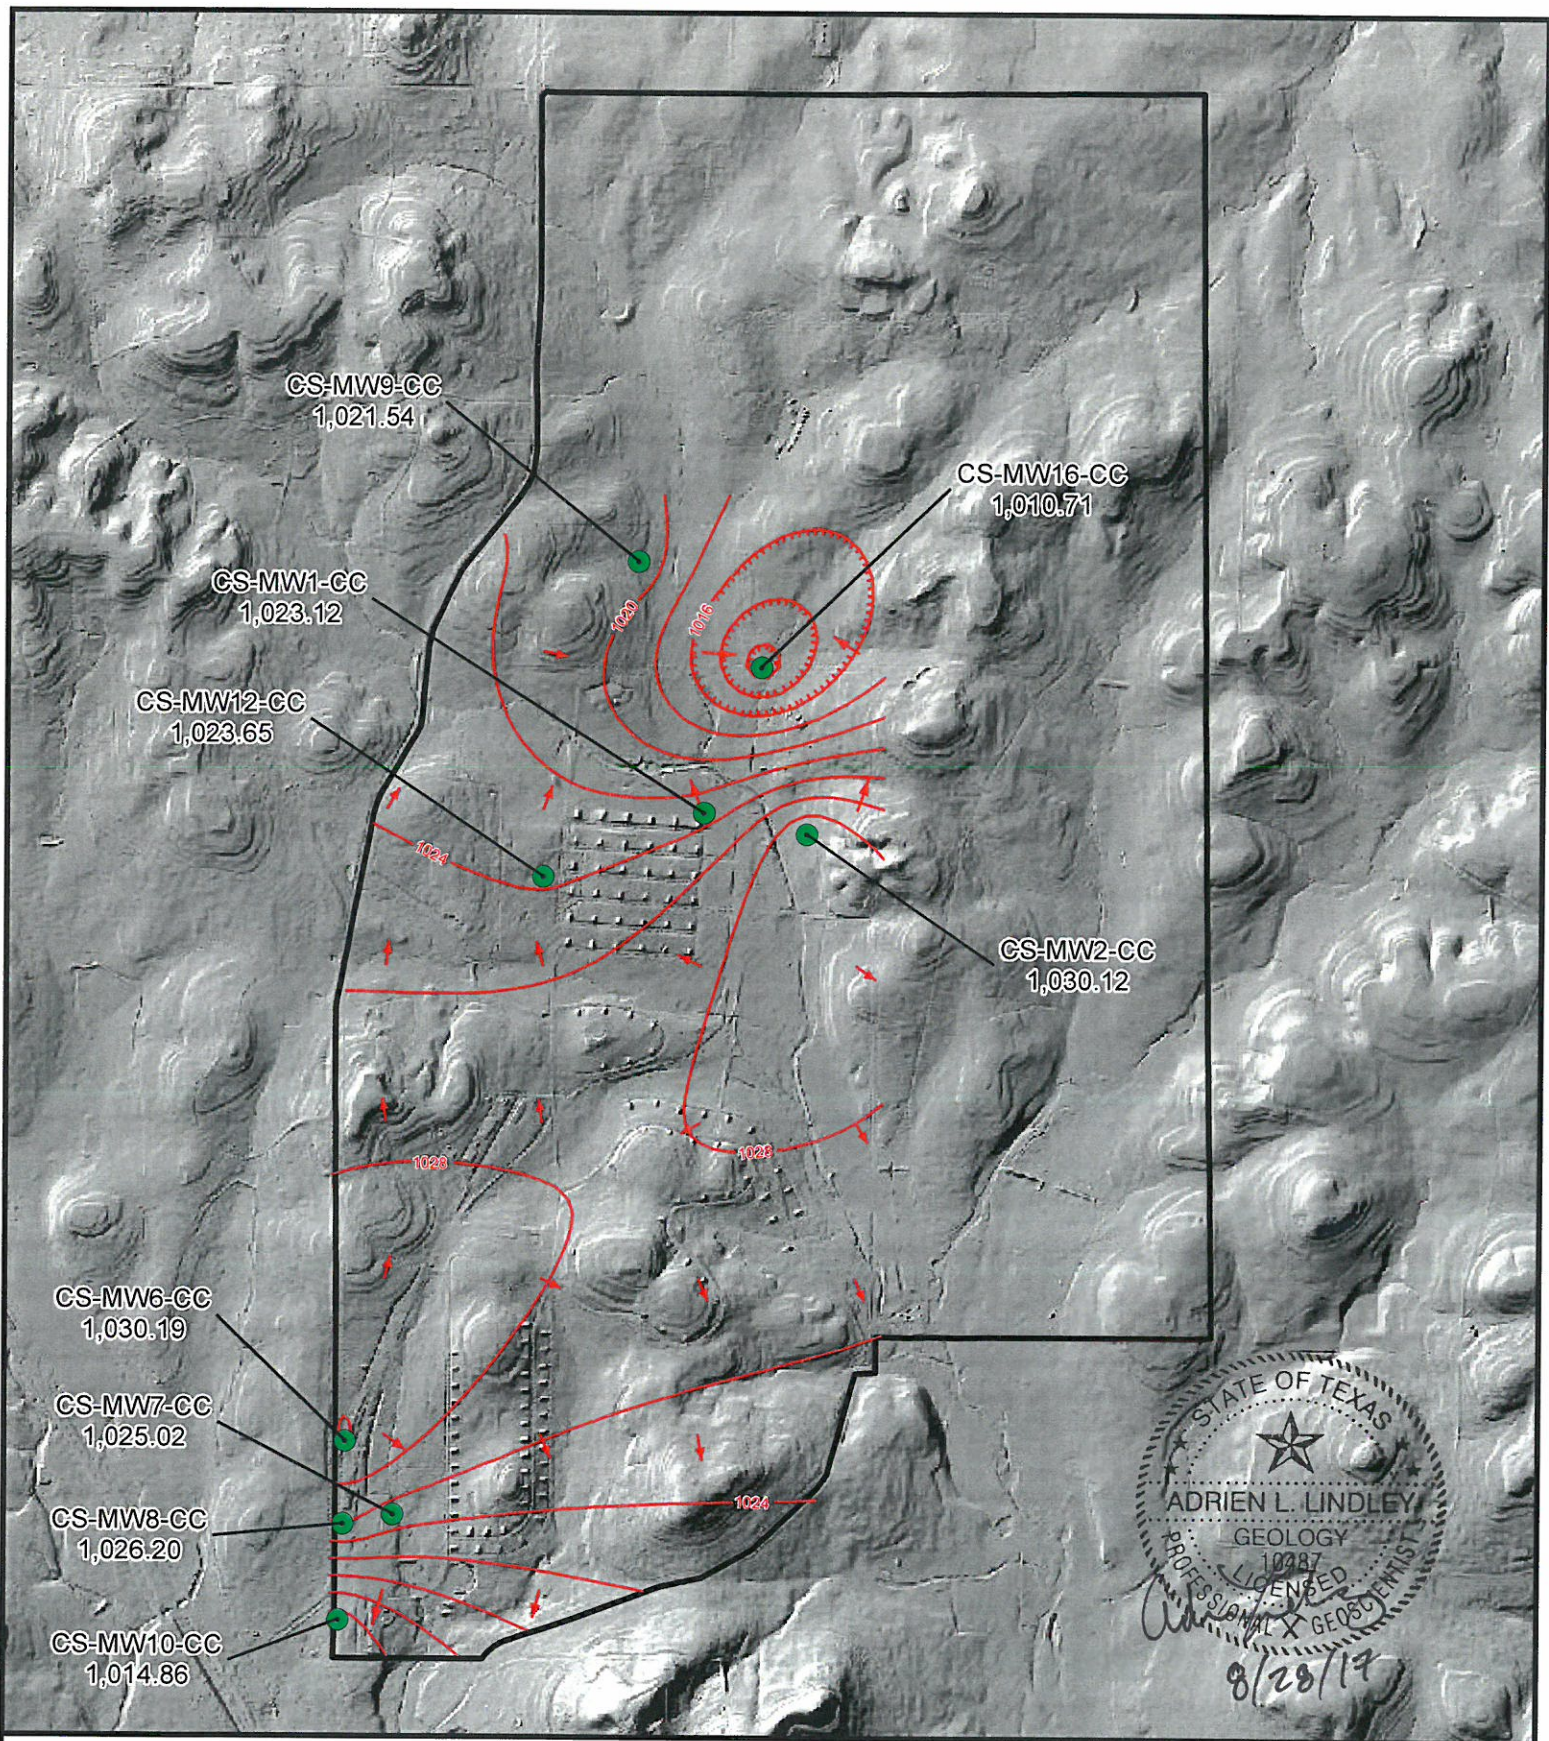

- Flow direction
- Outer fence
- CC Groundwater Contours
- CC Wells and groundwater elevation (ft above msl)


Figure 2-3

June 2017 Potentiometric
Surface Map, CC Wells

Camp Stanley Storage Activity

PARSONS

Figure 2.4 - Average LGR Groundwater Elevations and Quarterly/Annual Precipitation

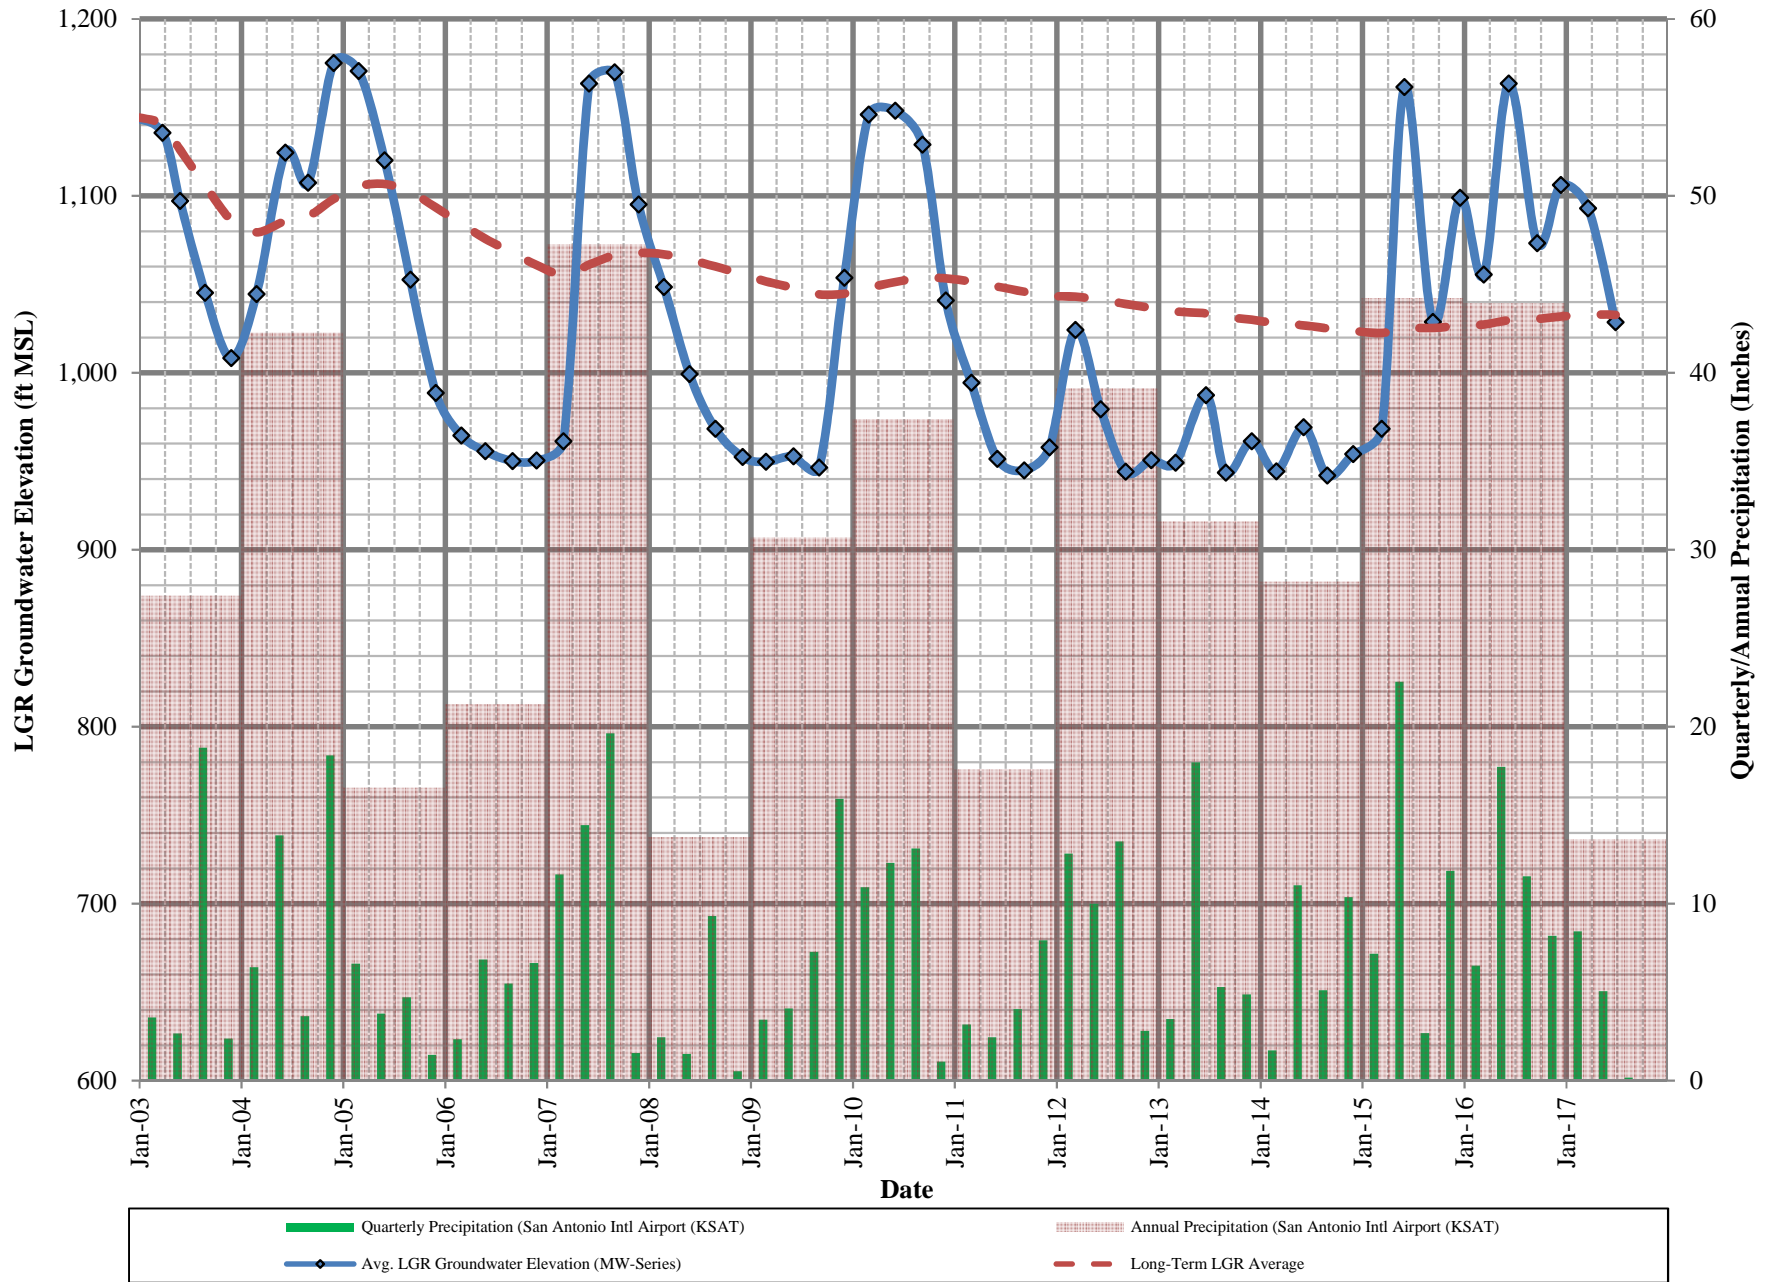

It should be noted that well pumping on and around CSSA affects the potentiometric surface. On-post wells CS-MW16-LGR, CS-MW16-CC, B3-EXW01, B3-EXW02, B3-EXW03, B3-EXW04, and B3-EXW05 are cyclically pumped as part of the Bioreactor remediation system at Solid Waste Management Unit (SWMU) B-3. These remediation wells provide groundwater to the Bioreactor system, and are automatically operated based upon water level within each well and availability within the storage tanks. Influences from the pumping of the Bioreactor wells B3-EXW01 through B3-EXW05 are manifested as “cones of depression” in **Figure 2.1**. The Bioreactor cone of depression is induced into the aquifer to extract contaminated water within its direct zone of influence, and otherwise retard the flow of the groundwater that cannot be directly captured by the extraction wells away from the site.

CSSA drinking water wells CS-1, CS-10, CS-12, and CS-13 are also cycled on and off to maintain the drinking water system currently in place at CSSA. Off-post water supply wells along Ralph Fair Road may also exert a subtle influence to gradients along the western and southern boundaries of the post. In fact, the northern end of CSSA exhibits a southwesterly gradient from well CS-I towards CS-12. In the central portion of CSSA, a westerly gradient is evident between the groundwater mound at CS-MW4-LGR and supply well CS-10. In the southern end of the base, a southerly groundwater gradient is evident.

Historical groundwater monitoring at CSSA has demonstrated that the aquifer gradient typically slopes in a south-southeast direction; however, variable aquifer levels and well-pumping scenarios can affect the localized and regional gradients (**Figure 2.1**). In particular, pumping action at wells CS-1, CS-10, CS-12, CS-13, CS-MW16-LGR/CC, B3-EXW01 through B3-EXW05, CS-MWH-LGR, CS-I, and even off-post wells (Fair Oaks Ranch) can significantly alter the LGR groundwater gradient. The regional gradient calculation, an overall groundwater gradient averaged across CSSA, is measured from CS-MWH-LGR to CS-1 (0.0004044 ft/ft) indicating a southerly flow. However because of the groundwater trough between CS-12 and the Bioreactor, this typical flow is interrupted in June 2017. North Pasture groundwater from CS-I flows towards CS-12 at a gradient of 0.0038 ft/ft. Localized gradients of 0.0107 ft/ft to the west were measured between CS-MW4-LGR and CS-10. A south-southeasterly gradient of 0.0040 ft/ft was present between CS-MW21-LGR and CS-1 at the southern end of the camp.

Under normal conditions, the potentiometric surface in both the BS and CC members of the aquifer generally trend in a southerly direction, like the LGR. But during periods of above-average water levels or intense aquifer recharge, a strongly dominant eastward component in both the BS and CC is often observed. The cone of depression from pumping at CS-MW16-CC can interrupt the typical flow patterns within the CC and BS (**Figures 2.2 and 2.3**). The BS potentiometric surface has a distinctly north-northeasterly gradient towards CS-MW9-BS (**Figure 2.2**), with an average groundwater elevation of 1,048.68 feet MSL. The CC potentiometric surface shows a groundwater divide in the southern third of the post, with flow toward the northeast and the cone of depression centered on CS-MW16-CC in the central portion of the post and a more southerly flow in the southern portion of the post. The CC average elevation in June 2017 was 1,022.82 feet MSL.

A review of historical data has shown that the CC potentiometric surface develops a predominantly easterly gradient when the average CC groundwater elevation is higher than 995 feet MSL. Below that elevation, the gradient resumes a more southerly direction. Notable for June 2017 is the well-developed cone of depression around the Bioreactor extraction well, CS-

MW16-CC. That well is used for continuous groundwater extraction for the SWMU B-3 Bioreactor system. The cone of depression was last observed in September and 2016 and March 2017 events, however, the CC aquifer previously showed a predominantly east-southeasterly flow gradient which is interrupted by the well-developed cone of depression around well CS-MW16-CC.

Groundwater elevations have been measured and recorded since 1992. Previous droughts resulted in water levels decreasing substantially in 1996, 1999, 2000, 2006, 2008, 2009, 2011 through 2014. In 2015, approximately 44 inches of rainfall in the San Antonio area ended the drought cycle, resulting in a net gain of 145 feet in aquifer level over the course of the year. Through June 2017, approximately 13.47 inches of rainfall has been realized in the San Antonio area. By the end of June 2017, the postwide average level in the LGR wells decreased approximately 65 feet from March 2017. With this decrease, the June 2017 LGR groundwater average elevation (1,028.54 feet MSL) is now 4.5 feet below the long-term (14.5 year) average groundwater elevation (1,032.82 feet MSL).

It is worth noting that, based on more than 14.5 years of program history, the postwide LGR groundwater level has declined by 112.5 feet (see **Figure 2.4**). As can be expected with sparse data sets, the largest rate of change/decline (90 feet) came during the initial 4 years of the groundwater monitoring program. Over the past 10 years, the average decline rate has subdued, losing an additional 20 feet of average groundwater elevation over 7 years of prolonged drought (with the exception of 2010). The past 14.5-year history of CSSA groundwater monitoring indicates that the aquifer level is “below average” approximately 66 percent of the time. However, the past eight monitoring events prior to the June 2017 monitoring event (June, September, December 2015, March, June, September, December 2016, and March 2017) have shown above-average aquifer levels. Above average groundwater elevations have been recorded only nine times in the past 28 monitoring events (7 years). Prior to June 2015, the LGR had not been above the long-term “average” water elevation since September 2010.

3.0 JUNE ANALYTICAL RESULTS

3.1 Monitoring Wells

Under the provisions of the groundwater monitoring DQOs and the 2015 LTMO evaluation, the schedule for sampling on-post in June 2017 included 43 wells. The samples included four production wells (CS-1, CS-10, CS-12, and CS-13) and 39 monitoring wells (see **Table 3.1**). In conjunction with the off-post monitoring initiative (under a separate report) the June 2017 groundwater sampling constituted a “30 month” event as outlined in the 2015 LTMO updated schedule, which was implemented in December 2016.

All 43 wells scheduled for monitoring in June 2017 were sampled. Additional samples were collected as part of the AOC-65 in-situ chemical oxidation (ISCO) and SWMU B-3 bioreactor Corrective Measures operations; these results will be documented in separate reports. **Tables 3.1** and **3.2** provide a sampling overview for June 2017 and the schedule under the LTMO recommendations. The wells listed in **Table 3.1** are sampled using dedicated low-flow gas-operated bladder pumps. Wells CS-1, CS-10, CS-12, CS-13, CS-I, and CS-MWH-LGR were sampled using dedicated electric submersible pumps. **Figure 3.1** shows well sampling locations.

Wells sampled by low-flow pumps were purged until the field parameters of pH, temperature, and conductivity stabilized. The on-post monitoring wells were sampled in June 2017 for volatile organic compounds (VOCs) analytes which include *cis*-1,2-dichloroethene (*cis*-1,2-DCE), tetrachloroethene (PCE), trichloroethene (TCE), and vinyl chloride. Effective in September 2016 per the recently-approved DQOs, metals are no longer obtained from on-post monitoring wells. Metals analyses will continue to be collected from active groundwater remediation sites (AOC-65 and B-3), as well as on-post drinking water wells. As such, active and future drinking water wells CS-1, CS-10, CS-12, and CS-13 were analyzed for the same VOC analytes and metals (arsenic, barium, chromium, copper, zinc, cadmium, mercury, and lead). Newly installed monitoring well CS-MW37-LGR was sampled for an expanded list of analytes in accordance with the groundwater DQO's.

Samples were analyzed by Agriculture & Priority Pollutant Laboratories (APPL) in Clovis, California. All detected concentrations of VOCs and metals are presented in **Table 3.3**. Full analytical results are presented in **Appendix B**.

VOCs were detected above the Maximum Contaminant Level (MCL) of 5 micrograms per liter ($\mu\text{g/L}$) in wells CS-D, CS-MW1-LGR, CS-MW5-LGR, and CS-MW36-LGR sampled this quarter. A comparison of VOC concentrations versus water level for select wells is presented in **Figure 3.2**. The overall trend for CS-D, CS-4, CS-MW1-LGR, CS-MW5-LGR, CS-MW36-LGR sampled in June 2017 was a slight decrease in VOC concentrations with a decrease in groundwater elevation. CS-MW5-LGR has been sampled since 2001, but it did not show concentrations of PCE and TCE above the MCL until December 2015.

**Table 3.1
Overview of the On-Post Monitoring Program**

Count	Well ID	Analytes	Last Sample Date	Dec-16	Mar-17	Jun-17	Sampling Frequency*
1	CS-MW1-LGR	VOCs	Sep-16	NS	NS	S	15 months / semi annual B-3
	CS-MW1-BS	VOCs	Dec-12	NS	NS	NS	as needed
2	CS-MW1-CC	VOCs	Dec-15	NS	NS	S	30 months
3	CS-MW2-LGR	VOCs	Sep-16	NS	NS	S	30 months
4	CS-MW2-CC	VOCs	Dec-15	NS	NS	S	30 months
5	CS-MW3-LGR	VOCs	Sep-16	NS	NS	S	30 months
6	CS-MW4-LGR	VOCs	Sep-16	NS	NS	S	30 months
7	CS-MW5-LGR	VOCs	Sep-16	NS	NS	S	15 months / semi annual B-3
8	CS-MW6-LGR	VOCs	Sep-16	NS	NS	S	15 months GW / Qtrly ISCO
	CS-MW6-BS	VOCs	Dec-12	NS	NS	NS	as needed
9	CS-MW6-CC	VOCs	Dec-15	NS	NS	S	30 months
10	CS-MW7-LGR	VOCs	Sep-16	NS	NS	S	15 months GW / Qtrly ISCO
11	CS-MW7-CC	VOCs	Dec-15	NS	NS	S	30 months
12	CS-MW8-LGR	VOCs	Sep-16	NS	NS	S	15 months GW / Qtrly ISCO
13	CS-MW8-CC	VOCs	Dec-15	NS	NS	S	15 months
14	CS-MW9-LGR	VOCs	Sep-16	NS	NS	S	30 months
	CS-MW9-BS	VOCs	Dec-12	NS	NS	NS	as needed
15	CS-MW9-CC	VOCs	Dec-15	NS	NS	S	30 months
16	CS-MW10-LGR	VOCs	Sep-16	NS	NS	S	15 months
17	CS-MW10-CC	VOCs	Dec-15	NS	NS	S	30 months
18	CS-MW11A-LGR	VOCs	Sep-16	NS	NS	S	15 months
19	CS-MW11B-LGR	VOCs	Sep-16	NS	NS	S	15 months
20	CS-MW12-LGR	VOCs	Sep-16	NS	NS	S	15 months
	CS-MW12-BS	VOCs	Dec-12	NS	NS	NS	as needed
21	CS-MW12-CC	VOCs	Dec-15	NS	NS	S	30 months
22	CW-MW17-LGR	VOCs	Sep-16	NS	NS	S	15 months
23	CS-MW18-LGR	VOCs	Sep-16	NS	NS	S	30 months
24	CS-MW19-LGR	VOCs	Sep-16	NS	NS	S	30 months
25	CS-1	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Dec-16	S	S	S	Quarterly
26	CS-2	VOCs	Sep-16	NS	NS	S	30 months
27	CS-4	VOCs	Sep-16	NS	NS	S	15 months
28	CS-10	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Dec-16	S	S	S	Quarterly
29	CS-12	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Dec-16	S	S	S	Quarterly
30	CS-13	VOCs & metals (As,Ba,Cr, Cu,Cd,Hg,Pb,Zn)	Sep-16	offline	S	S	Quarterly
31	CS-D	VOCs	Sep-16	NS	NS	S	15 months GW / semi annual B3
32	CS-MWG-LGR	VOCs	Dec-15	NS	NS	S	30 months
33	CS-MWH-LGR	VOCs	Dec-15	NS	NS	S	30 months
34	CS-I	VOCs	Dec-15	NS	NS	S	30 months
35	CS-MW20-LGR	VOCs	Sep-16	NS	NS	S	30 months
36	CS-MW21-LGR	VOCs	Sep-16	NS	NS	S	30 months
37	CS-MW22-LGR	VOCs	Sep-16	NS	NS	S	30 months
38	CS-MW23-LGR	VOCs	Sep-16	NS	NS	S	30 months
39	CS-MW24-LGR	VOCs	Sep-16	NS	NS	S	30 months
40	CS-MW25-LGR	VOCs	Sep-16	NS	NS	S	30 months
41	CS-MW35-LGR	VOCs	Sep-16	NS	NS	S	30 months
42	CS-MW36-LGR	VOCs	Sep-16	NS	NS	S	15 months GW / Qtrly ISCO
43	CS-MW37-LGR	VOCs	Sep-16			S	quarterly for 1 yr

* New LTMO sampling frequency to be implemented in December 2016

S = Sample

NS = No Sample

NSWL = No Sample due to low water level

Table 3.2 Westbay Sampling Frequency


Westbay Interval	Last Sample Date	Jun-16 (9 month)	Sep-16 (transition event)	Dec-16	Mar-17	Jun-17	LTMO Sampling Frequency (as of Dec. 2016)
CS-WB01-UGR-01	Dec-04	NSWL	NSWL	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB01-LGR-01	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB01-LGR-02	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-03	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-04	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-05	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-06	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-07	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-08	Sep-16	S	S	NS	NS	S	15 months
CS-WB01-LGR-09	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB02-UGR-01	Dec-04	NS	NS	NS	NS	S	port clogged, no sample
CS-WB02-LGR-01	Dec-14	NSWL	NSWL	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB02-LGR-02	Mar-10	NSWL	NSWL	NS	NS	S	15 months
CS-WB02-LGR-03	Sep-16	S	S	NS	NS	S	15 months
CS-WB02-LGR-04	Sep-16	S	S	NS	NS	S	15 months
CS-WB02-LGR-05	Sep-16	S	S	NS	NS	S	15 months
CS-WB02-LGR-06	Sep-16	S	S	NS	NS	S	15 months
CS-WB02-LGR-07	Sep-16	S	S	NS	NS	S	15 months
CS-WB02-LGR-08	Sep-16	S	S	NS	NS	S	15 months
CS-WB02-LGR-09	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB03-UGR-01	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB03-LGR-01	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB03-LGR-02	Oct-07	NSWL	NSWL	NS	NS	S	15 months
CS-WB03-LGR-03	Sep-16	S	S	NS	NS	S	15 months
CS-WB03-LGR-04	Sep-16	S	S	NS	NS	S	15 months
CS-WB03-LGR-05	Sep-16	S	S	NS	NS	S	15 months
CS-WB03-LGR-06	Sep-16	S	S	NS	NS	S	15 months
CS-WB03-LGR-07	Sep-16	S	S	NS	NS	S	15 months
CS-WB03-LGR-08	Sep-16	S	S	NS	NS	S	15 months
CS-WB03-LGR-09	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB04-UGR-01	Mar-04	NSWL	NSWL	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB04-LGR-01	Sep-15	NS	NS	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB04-LGR-02	Mar-14	NS	NS	NS	NS	S	15 months
CS-WB04-LGR-03	Sep-15	NS	NS	NS	NS	S	15 months
CS-WB04-LGR-04	Sep-15	NS	NS	NS	NS	S	15 months
CS-WB04-LGR-06	Sep-16	S	S	NS	NS	S	15 months
CS-WB04-LGR-07	Sep-16	S	S	NS	NS	S	15 months
CS-WB04-LGR-08	Sep-16	S	S	NS	NS	S	15 months
CS-WB04-LGR-09	Sep-16	S	S	NS	NS	S	15 months
CS-WB04-LGR-10	Sep-16	S	S	NS	NS	S	15 months
CS-WB04-LGR-11	Sep-16	S	S	NS	NS	S	15 months GW/Qtrly ISCO
CS-WB04-BS-01	Sep-15	NS	NS	NS	NS	S	30 months
CS-WB04-BS-02	Sep-15	NS	NS	NS	NS	S	30 months
CS-WB04-CC-01	Sep-15	NS	NS	NS	NS	S	30 months
CS-WB04-CC-02	Sep-15	NS	NS	NS	NS	S	30 months
CS-WB04-CC-03	Sep-15	NS	NS	NS	NS	S	30 months

Profiling performed quarterly, in conjunction with post wide water levels.

S = Sample

NS = No Sample

NSWL = No sample due to low water level

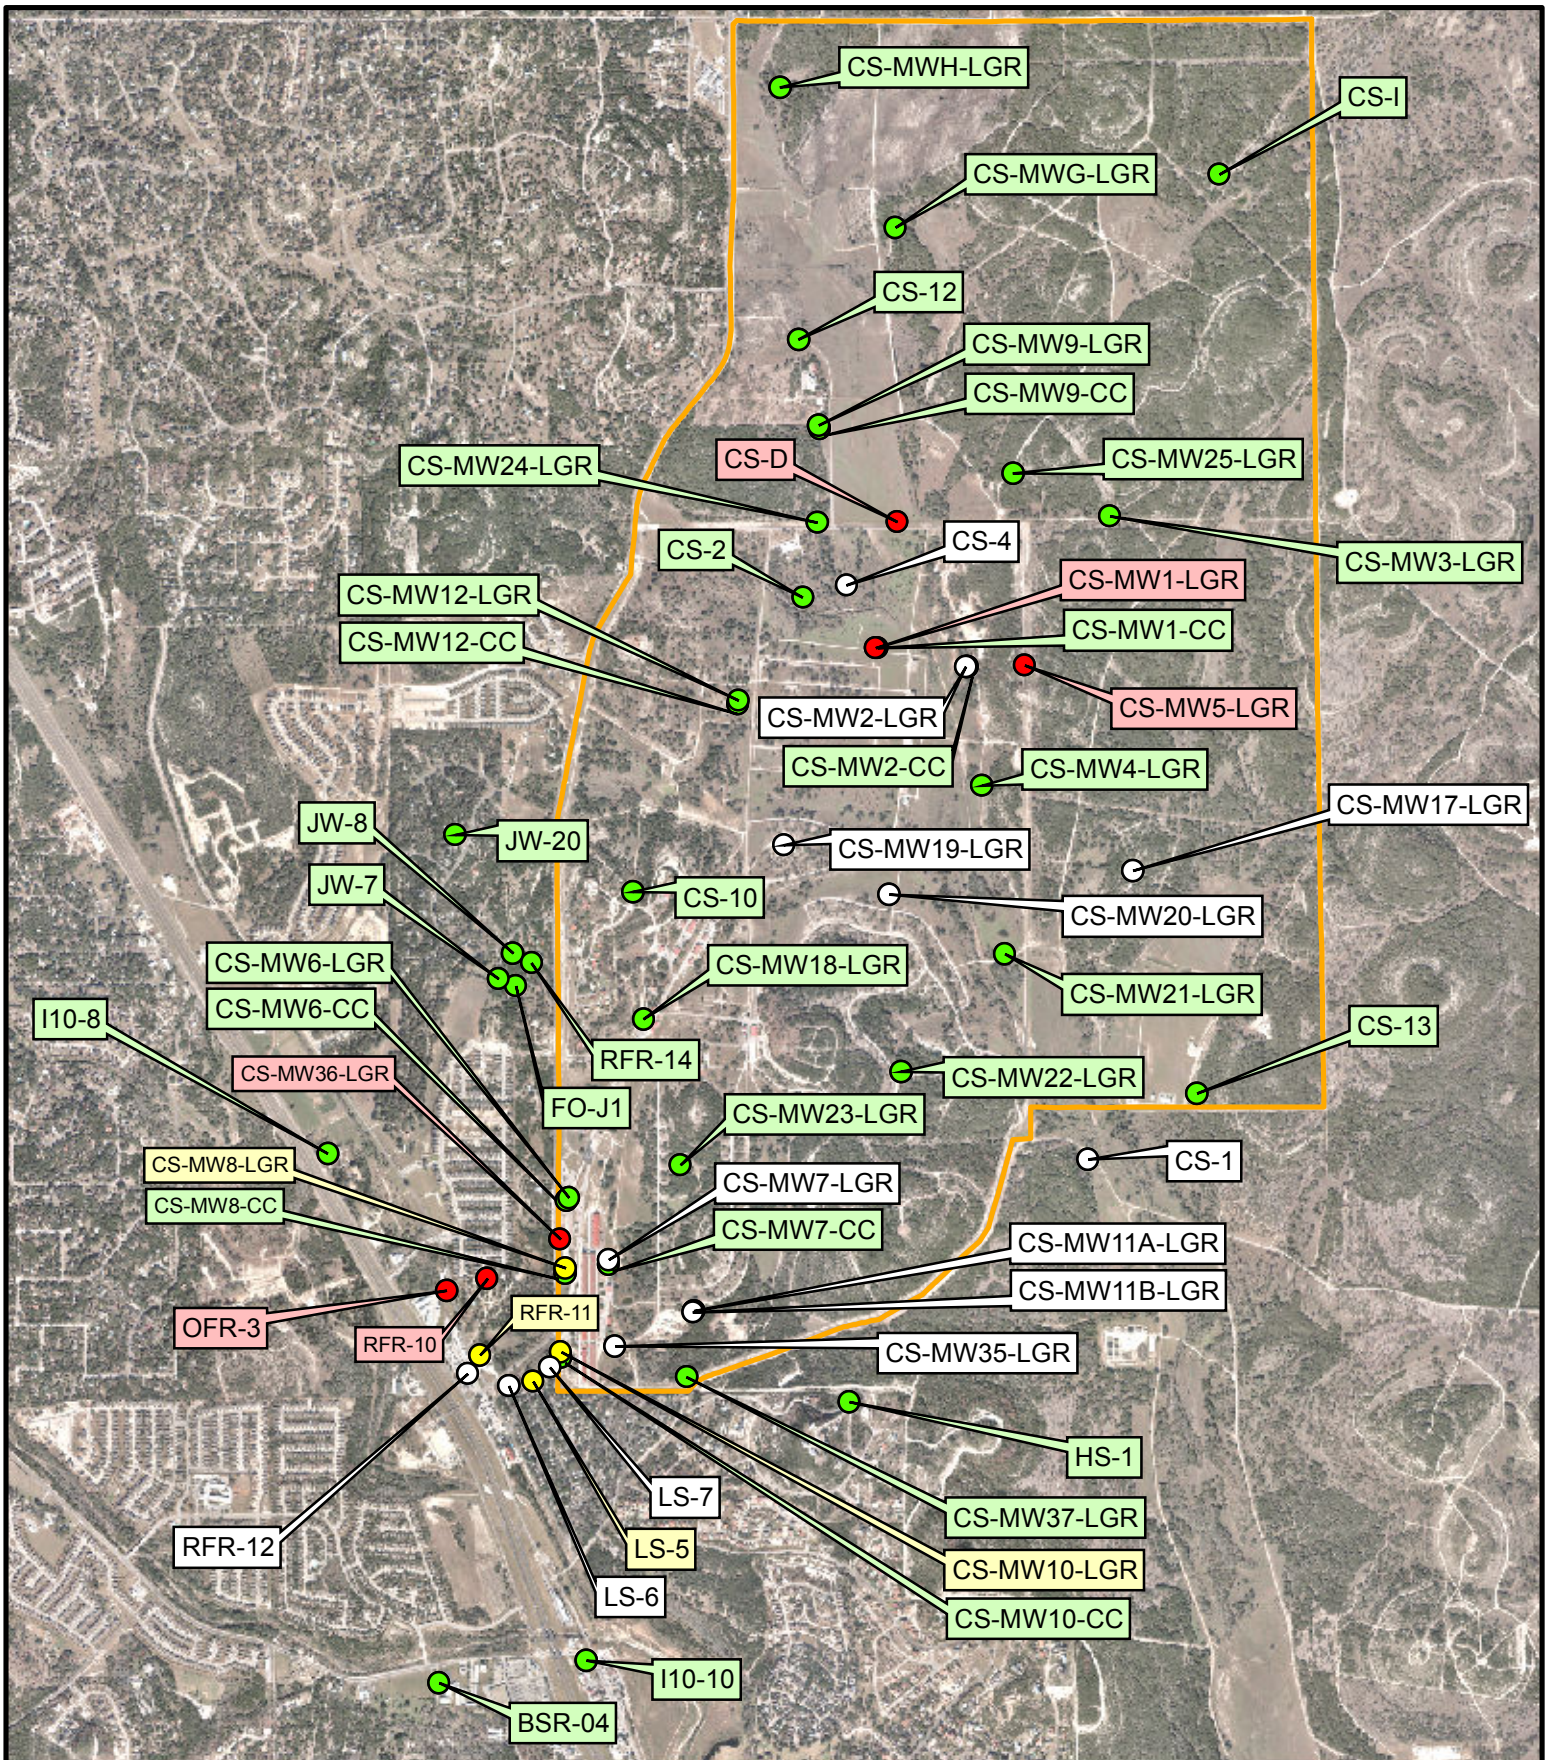

0 0.25 0.5
Miles

Sampled Wells June 2017

- > MCL (VOC's) only
- > RL (VOC's) only
- > MDL (VOC's) only
- ND

Figure 3-1

On-Post and Off-Post Well Sampling Locations for June 2017

Camp Stanley Storage Activity

PARSONS

**Table 3.3
June 2017 On-Post Quarterly Groundwater Results, Detected Analytes**

Well ID	Sample Date	Arsenic	Barium	Cadmium	Chromium	Copper	Lead	Zinc	Mercury
CSSA Drinking Water Well System									
CS-1	6/27/2017	--	0.0331	--	--	0.014	0.0057F	0.175	--
CS-1 FD	6/27/2017	0.00101F	0.0357	--	--	0.015	0.0043F	0.145	--
CS-10	6/27/2017	0.00121F	0.0376	--	0.0012F	--	0.0027F	0.387	--
CS-12	6/27/2017	0.00125F	0.03	--	0.0746	--	0.0031F	0.033F	--
CS-13	6/28/2017	0.00418F	0.0319	--	0.0016F	--	0.0034F	0.435	--
Comparison Criteria									
Method Detection Limit (MDL)		0.00022	0.0003	0.0005	0.001	0.003	0.0019	0.008	0.0001
Reporting Limit (RL)		0.03	0.005	0.007	0.01	0.01	0.025	0.05	0.001
Max. Contaminant Level (MCL)		0.01	2	0.005	0.1	AL=1.3	AL=0.015	SS=5.0	0.002

Well ID	Sample Date	cis-1,2-DCE	PCE	TCE	Vinyl Chloride
CS-D	6/19/2017	4.47	5.32	6.56	--
CS-MWG-LGR	6/26/2017	--	--	--	--
CS-MWH-LGR	6/20/2017	--	--	--	--
CS-I	6/20/2017	--	--	--	--
CS-2	6/16/2017	--	--	--	--
CS-4	6/16/2017	--	0.61F	0.22F	--
CS-4 FD	6/16/2017	--	0.59F	0.25F	--
CS-MW1-LGR	6/19/2017	20.49	13.98	24.73	--
CS-MW1-CC	6/28/2017	--	--	--	--
CS-MW2-LGR	6/19/2017	0.36F	--	--	--
CS-MW2-CC	6/28/2017	--	--	--	--
CS-MW3-LGR	6/19/2017	--	--	--	--
CS-MW4-LGR	6/28/2017	--	--	--	--
CS-MW5-LGR	6/16/2017	11.65	5.87	13.16	--
CS-MW6-LGR	6/8/2017	--	--	--	--
CS-MW6-CC	6/8/2017	--	--	--	--
CS-MW7-LGR	6/20/2017	--	0.88F	--	--
CS-MW7-CC	6/26/2017	--	--	--	--
CS-MW7-CC FD	6/26/2017	--	--	--	--
CS-MW8-LGR	6/8/2017	--	2.62	--	--
CS-MW8-CC	6/8/2017	--	--	--	--
CS-MW9-LGR	6/19/2017	--	--	--	--
CS-MW9-LGR FD	6/19/2017	--	--	--	--
CS-MW9-CC	6/19/2017	--	--	--	--
CS-MW10-LGR	6/26/2017	--	1.89	--	--
CS-MW10-CC	6/26/2017	--	--	--	--
CS-MW11A-LGR	6/26/2017	--	0.89F	--	--
CS-MW11B-LGR	6/26/2017	--	0.98F	--	--
CS-MW12-LGR	6/16/2017	--	--	--	--
CS-MW12-CC	6/16/2017	--	--	--	--
CS-MW17-LGR	6/28/2017	--	0.67F	--	--
CS-MW17-LGR FD	6/28/2017	--	0.76F	--	--
CS-MW18-LGR	6/16/2017	--	--	--	--
CS-MW19-LGR	6/16/2017	--	0.68F	--	--
CS-MW20-LGR	6/26/2017	--	1.23F	--	--
CS-MW21-LGR	6/28/2017	--	--	--	--
CS-MW22-LGR	6/26/2017	--	--	--	--
CS-MW23-LGR	6/26/2017	--	--	--	--
CS-MW24-LGR	6/19/2017	--	--	--	--
CS-MW25-LGR	6/27/2017	--	--	--	--
CS-MW35-LGR	6/26/2017	--	0.66F	--	--
CS-MW36-LGR	6/8/2017	--	5.43	4.2	--

**Table 3.3
June 2017 On-Post Quarterly Groundwater Results, Detected Analytes**

CSSA Drinking Water Well System					
CS-1	6/27/2017	--	--	0.16F	--
CS-1 FD	6/27/2017	--	--	0.19F	--
CS-10	6/27/2017	--	--	--	--
CS-12	6/27/2017	--	--	--	--
CS-13	6/28/2017	--	--	--	--
Comparison Criteria					
Method Detection Limit (MDL)		0.07	0.06	0.05	0.08
Reporting Limit (RL)		1.2	1.4	1	1.1
Max. Contaminant Level (MCL)		70	5	5	2

BOLD	= Above the MDL
BOLD	= Above the RL
BOLD	= Above the MCL

Precipitation per Quarter:	Mar-17	Jun-17
AOC-65 Weather Station (AOC-65 WS)	NA	5.31
B-3 Weather Station (B-3 WS)	7.61	6.86

All samples were analyzed by APPL, Inc.
 VOC data reported in ug/L & metals data reported in mg/L.


Abbreviations/Notes:

FD Field Duplicate
 TCE Trichloroethene
 PCE Tetrachloroethene
 DCE Dichloroethene
 AL Action Level
 SS Secondary Standard

Data Qualifiers:

--The analyte was analyzed for, but not detected. The associated numerical value is at or below the MDL.
 F-The analyte was positively identified but the associated numerical value is below the RL.
 NA - data not available

Figure 3.2
On-Post Cumulative Analytical vs. Groundwater Elevation

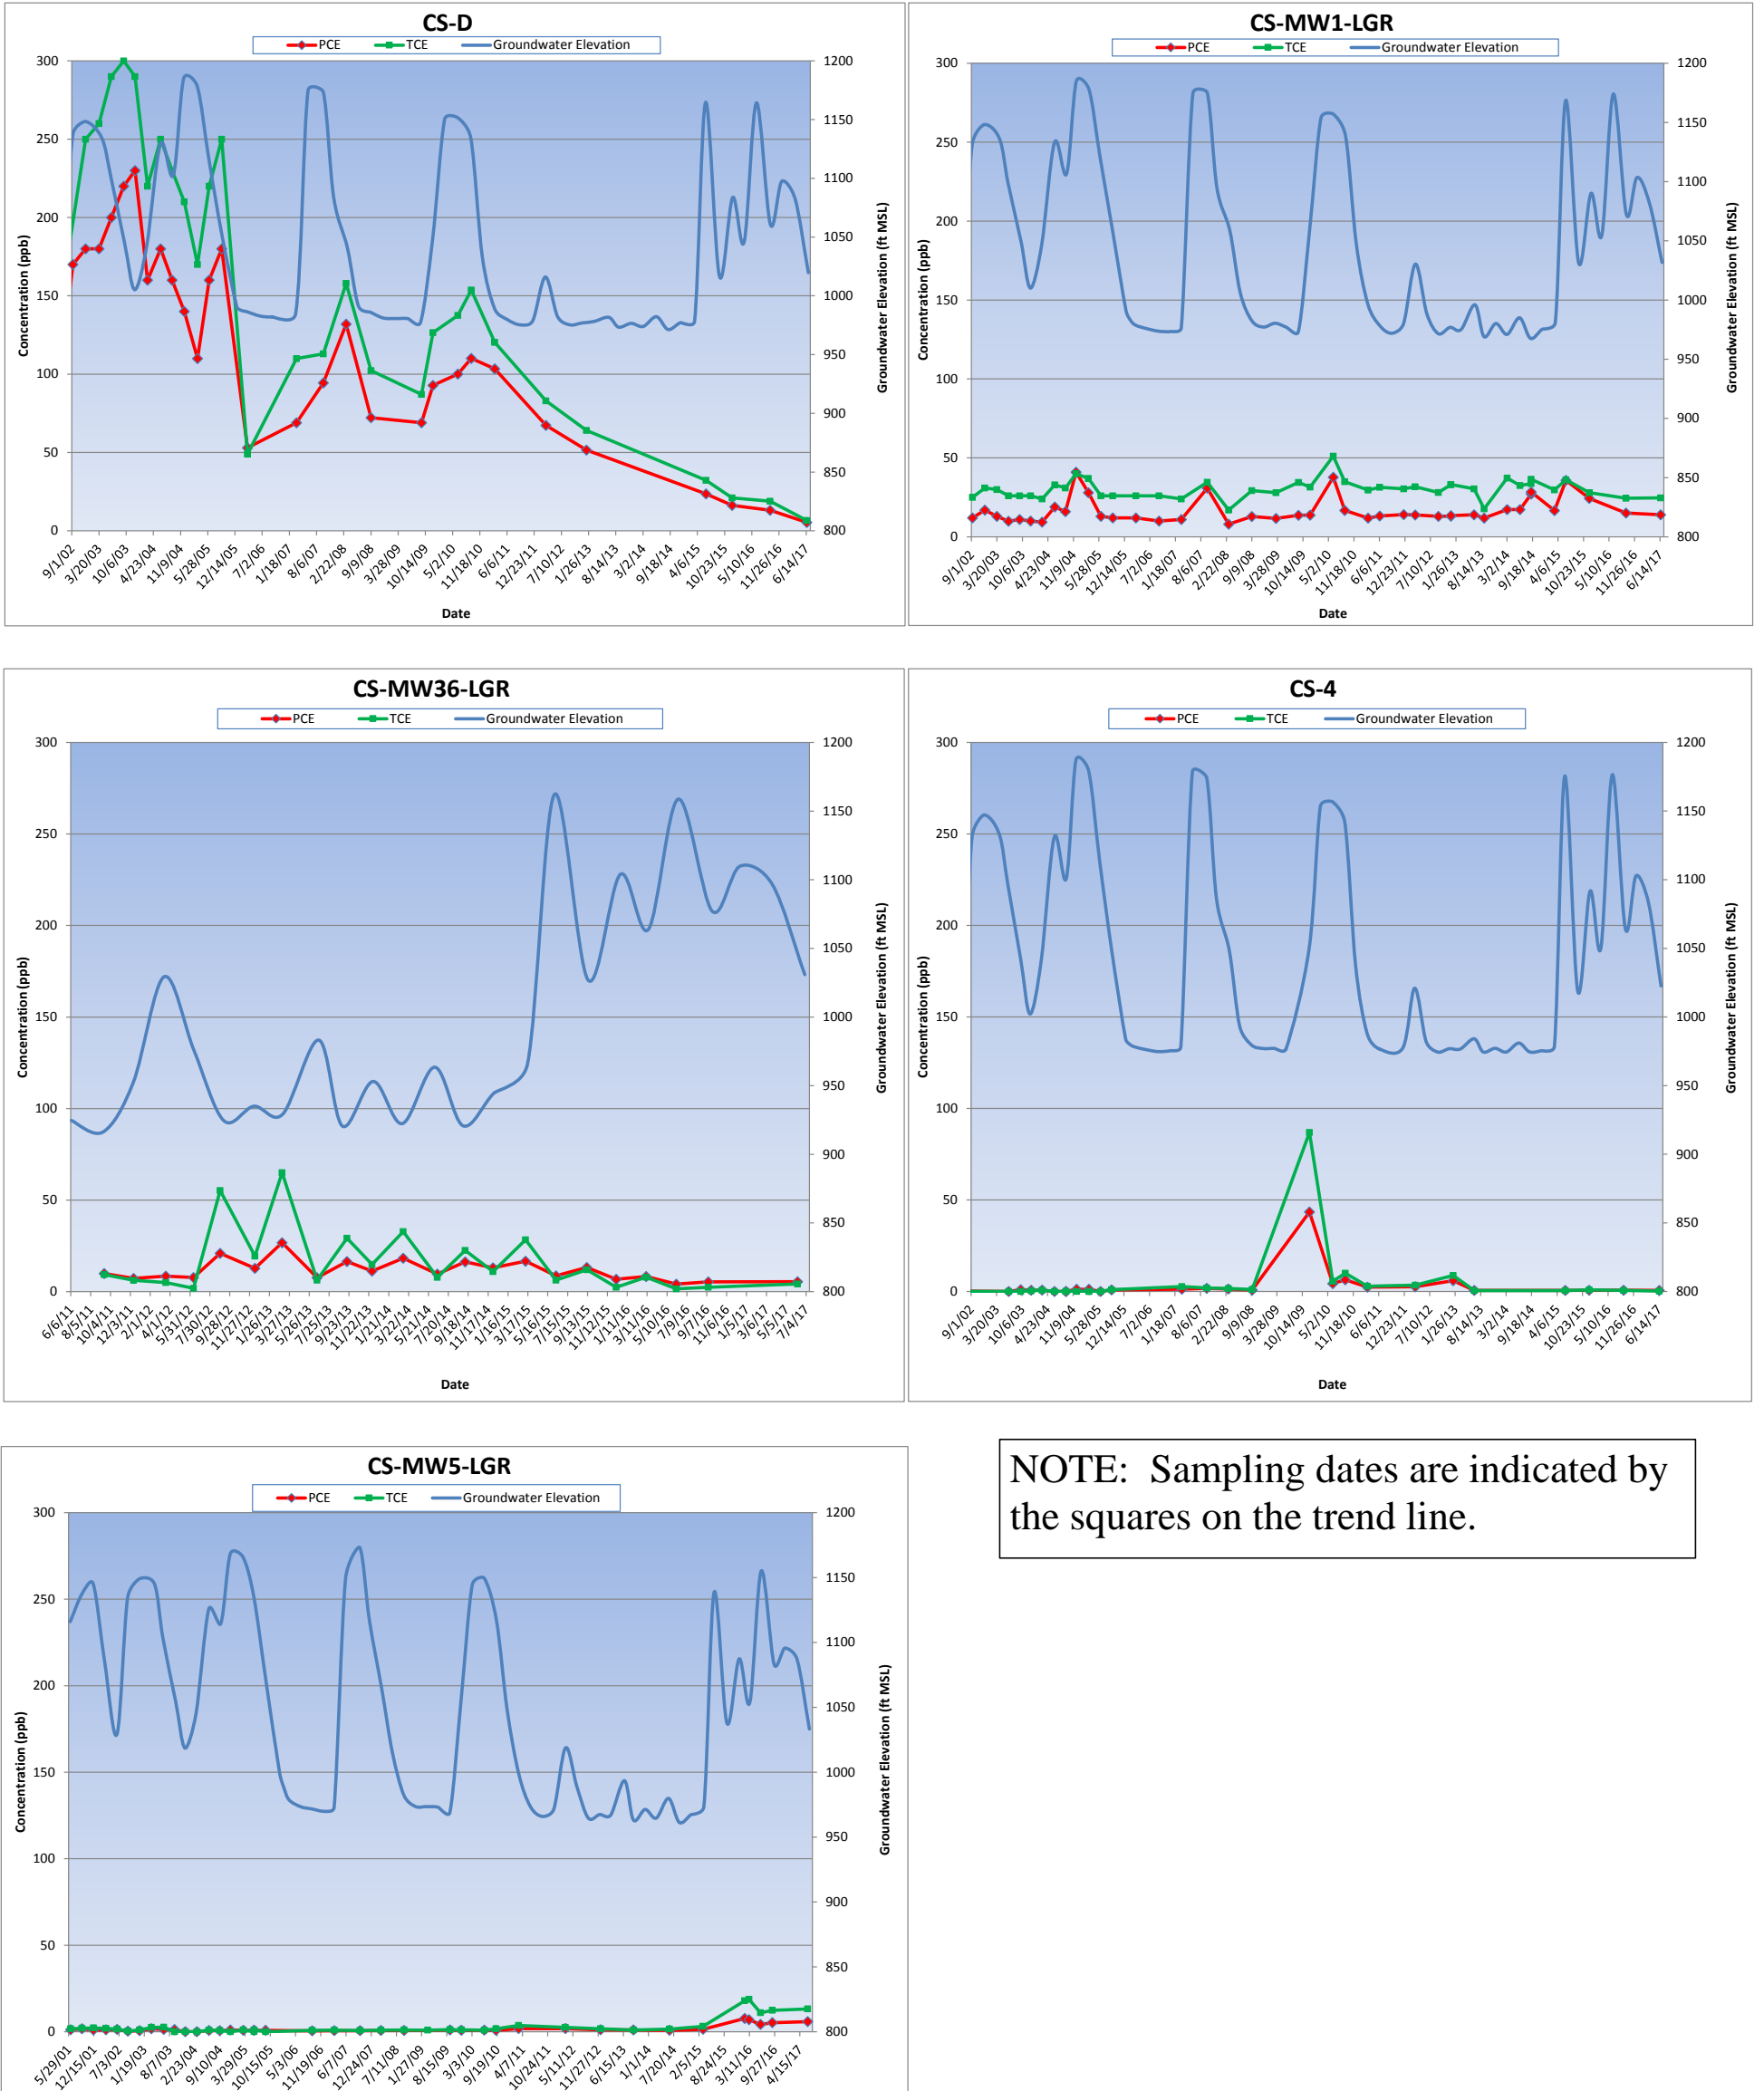

NOTE: Sampling dates are indicated by the squares on the trend line.

Results from on-post monitoring wells are considered definitive data and are subject to data validation and verification under provisions of the CSSA Quality Assurance Project Plan (QAPP). Parsons data packages numbered 110046-#82, -#84, -#85, -#89, and -#94 containing the analytical results from this sampling event, were received by Parsons June 29 through July 28, 2017. Data validation was conducted and the data validation reports are presented in **Appendix C**.

3.2 Westbay-equipped Wells

The recently updated LTMO schedule was implemented in December 2016. In June 2017, 46 Westbay Well zones were scheduled for sampling. These wells (CS-WB01, CS-WB02, CS-WB03, and CS-WB04) were also profiled to capture water level readings. These Westbay wells are located in the vicinity of AOC-65, and are part of the post-wide quarterly groundwater monitoring program. Per the recently-approved 2015 LTMO, the Upper Glen Rose (UGR)/LGR zones are to be sampled on a 15-month schedule and the BS/CC zones are sampled on a 30-month schedule. The sampling of these wells began in September 2003.

Of the 46 zones scheduled for sampling 6 zones (WB01-UGR-01, WB02-LGR-01 and -02, WB03-LGR-02, WB04-UGR-01 and -LGR-02) were dry and 1 zone (WB02-UGR-01) has a clogged sample port. Eleven zones had PCE and/or TCE above the MCL, 17 zones above the RL, and 7 zones above the MDL. Four of the 39 zones sampled were non-detect. All detected concentrations of VOCs are presented in **Table 3.4**. Full analytical results are presented in **Appendix B**.

WB01 zone -LGR-05 reported its highest *cis*-1,2-DCE detection to date and zone -LGR-06 reported its highest TCE detection. Zone -LGR-09 had its second and highest detection of vinyl chloride and its first sampling event with no PCE or TCE detection. These zones have been monitored since September 2003. WB02 zone -LGR-04 reported TCE below the MCL for the first time since 2006. Zone -LGR-05 showed its highest *cis*-1,2-DCE detection to date. WB03 zone -UGR-01 historically has the highest PCE and TCE detections of all zones sampled, in June 2017 these concentrations remained elevated. WB04 only had 2 zones (-LGR-06 and -LGR-09) with PCE and TCE above the MCL. Zone -CC-01 reported its highest concentration of *cis*-1,2-DCE to date. Zone -CC-03 which reported PCE above the MCL in 2015 is now back below the RL.

There are four other Westbay wells (CS-WB05, CS-WB06, CS-WB07, and CS-WB08) that are located at the SWMU B-3 remediation site. Those wells are sampled on a separate schedule in association with the SWMU B-3 bioreactor monitoring. Results for those wells are presented in the SWMU B-3 Performance Status Reports.

4.0 JUNE 2017 SUMMARY

- Groundwater samples were collected from 43 on-post wells scheduled for monitoring in June 2017 at Camp Stanley Storage Activity (CSSA).
- From April 1st to June 30, 2017, CSSA's AOC-65 weather station recorded 5.31 inches of rainfall and the SWMU B-3 weather station recorded 6.86 inches of rainfall. The rainfall was sporadic with 3.13/2.41 inches falling in April, 2.91/2.61 inches falling in May, and 0.83/0.29 inches in June from B-3/AOC-65 weather stations. Two events had greater than one inch of daily rainfall at B-3.
- The Middle Trinity aquifer levels (LGR, BS, and CC) decreased an average of 62.97 feet per non-pumping well since last quarter. The average water level in June 2017 (excluding pumping wells) was 212.48 feet BTOC (1,029.06 feet MSL).
- VOCs were detected above the MCL in June 2017 in wells CS-D, CS-MW1-LGR, CS-MW5-LGR, and CS-MW36-LGR (**Table 3.3**).
- There were no metals detected above the MCL/AL/SS in the wells sampled in June 2017.
- Of the 46 zones scheduled for sampling 6 zones (WB01-UGR-01, WB02-LGR-01 and -02, WB03-LGR-02, WB04-UGR-01 and -LGR-02) were dry and 1 zone (WB02-UGR-01) has a clogged sample port. Eleven zones had PCE and/or TCE above the MCL, 17 zones above the RL, and 7 zones above the MDL. Four of the 39 zones sampled were non-detect.

APPENDIX A

EVALUATION OF DATA QUALITY OBJECTIVES ATTAINMENT

Appendix A Evaluation of Data Quality Objectives Attainment

Activity	Objectives	Action	Objective Attained?	Recommendations
Field Sampling	Conduct field sampling in accordance with procedures defined in the project work plan, SAP, QAPP, HSP, and LTMO recommendations.	All sampling was conducted in accordance with the procedures described in the project plans.	Yes.	NA
Characterization of Environmental Setting (Hydrogeology)	Prepare water-level contour and/or potentiometric maps for each formation of the Middle Trinity Aquifer (3.5.3).	Potentiometric surface maps were prepared based on water levels measured in each of CSSA's wells screened in three formations on June 30, 2017.	To the extent possible with data available. Due to the limited data available and the fact that wells are completed across multiple water-bearing units, potentiometric maps should only be used for regional water flow direction, not local. Ongoing pumping in the CSSA area likely affects the natural groundwater flow direction.	As additional wells are installed screened in distinct formations, future evaluations will eliminate reliance on wells screened across multiple formations.
	Describe the flow system, including the vertical and horizontal components of flow (2.1.9).	Potentiometric maps were created using June 30, 2017 water level data, and horizontal flow direction was tentatively identified. Insufficient data are currently available to determine vertical component of flow.	As described above, due to the lack of aquifer-specific water level information, potentiometric surface maps should only be used as an estimate of regional flow direction.	Same as above.
	Define formation(s) in the Middle Trinity Aquifer are impacted by the VOC contaminants (2.1.3).	Quarterly groundwater monitoring provides information on Middle Trinity Aquifer impacts. Monitoring wells equipped with Westbay® - multi-port samplers are sampled every 15 or 30 months.	Yes.	Continue sampling.

Activity	Objectives	Action	Objective Attained?	Recommendations
Characterization of Environmental Setting (Hydrogeology) (Continued)	Identify any temporal changes in hydraulic gradients due to seasonal influences (2.1.5).	Downloaded data from continuous-reading transducers in wells: CS-MW4-LGR, CS-MW9-LGR, CS-MW12-LGR, CS-MW12-CC, and CS-MW10-CC. Additional continuous reading transducers were added to the program through the SCADA project. The following wells can be uploaded to see real time water level data: CS-MW16-LGR, CS-MW16-CC, CS-1, CS-12, CS-13, and CS-10. Data was also downloaded from the AOC-65 and B-3 weather stations. Water levels will be graphed at these wells against precipitation data through December 2017 and included in the annual groundwater report.	Yes.	Continue collection of transducer data and possibly install transducers in other cluster wells.
	Characterize the horizontal and vertical extent of any immiscible or dissolved plume(s) originating from the Facility (3.1.2).	Samples for laboratory analysis were collected from all 4 CSSA on-post drinking water wells and from 39 on-post monitoring wells. The 4 BS wells are no longer sampled as part of the groundwater program.	The horizontal and vertical extent of groundwater contamination is continuously monitored.	Continue groundwater monitoring and construct additional wells as necessary.

Activity	Objectives	Action	Objective Attained?	Recommendations															
Contamination Characterization (Ground Water Contamination)	Determine the horizontal and vertical concentration profiles of all constituents of concern (COC) in the groundwater that are measured by USEPA-approved procedures (3.1.2). COCs are those chemicals that have been detected in groundwater in the past and their daughter (breakdown) products.	Groundwater samples were collected from wells: CS-1, CS-2, CS-4, CS-10, CS-12, CS-13, CS-D, CS-MWG-LGR, CS-MWH-LGR, CS-I, CS-MW1-LGR, CS-MW1-CC, CS-MW2-LGR CS-MW2-CC, CS-MW3-LGR, CS-MW4-LGR, CS-MW5-LGR, CS-MW6-LGR, CS-MW6-CC, CS-MW7-LGR, CS-MW7-CC, CS-MW8-LGR, CS-MW8-CC, CS-MW9-LGR, CS-MW9-CC, CS-MW10-LGR, CS-MW10-CC, CS-MW11A-LGR, CS-MW11B-LGR, CS-MW12-LGR, CS-MW12-CC, CS-MW17-LGR, CS-MW18-LGR, CS-MW19-LGR, CS-MW20-LGR, CS-MW21-LGR, CS-MW22-LGR, CS-MW23-LGR, CS-MW24-LGR, CS-MW25-LGR, CS-MW35-LGR, CS-MW36-LGR, and CS-MW37-LGR . Samples were analyzed for the short list of VOCs using USEPA method SW8260B. The drinking water wells were also sampled for metals (arsenic, barium, chromium, copper, cadmium, mercury, lead, and zinc). Analyses were conducted in accordance with the CSSA QAPP and approved variances. All reporting limits (RL) were below MCLs, as listed below:	Yes.	Continue sampling.															
Contamination Characterization (Ground Water Contamination) (Continued)	Determine the horizontal and vertical concentration profiles of all constituents of concern (COC) in the groundwater that are measured by USEPA-approved procedures (3.1.2).	<table border="1"> <thead> <tr> <th data-bbox="621 997 793 1019">ANALYTE</th> <th data-bbox="800 997 905 1019">RL (µg /L)</th> <th data-bbox="974 997 1079 1019">MCL(µg/L)</th> </tr> </thead> <tbody> <tr> <td data-bbox="621 1019 737 1042"><i>cis</i>-1,2-DCE</td> <td data-bbox="800 1019 842 1042">1.2</td> <td data-bbox="974 1019 1016 1042">70</td> </tr> <tr> <td data-bbox="621 1042 663 1065">PCE</td> <td data-bbox="800 1042 842 1065">1.4</td> <td data-bbox="974 1042 995 1065">5</td> </tr> <tr> <td data-bbox="621 1065 663 1088">TCE</td> <td data-bbox="800 1065 842 1088">1.0</td> <td data-bbox="974 1065 995 1088">5</td> </tr> <tr> <td data-bbox="621 1088 747 1110">Vinyl chloride</td> <td data-bbox="800 1088 842 1110">1.1</td> <td data-bbox="974 1088 995 1110">2</td> </tr> </tbody> </table>	ANALYTE	RL (µg /L)	MCL(µg/L)	<i>cis</i> -1,2-DCE	1.2	70	PCE	1.4	5	TCE	1.0	5	Vinyl chloride	1.1	2	Yes.	Continue sampling.
ANALYTE	RL (µg /L)	MCL(µg/L)																	
<i>cis</i> -1,2-DCE	1.2	70																	
PCE	1.4	5																	
TCE	1.0	5																	
Vinyl chloride	1.1	2																	

Activity	Objectives	Action			Objective Attained?	Recommendations
Contamination Characterization (Ground Water Contamination) (Continued)	COCs are those chemicals that have been detected in groundwater in the past and their daughter (breakdown) products.	ANALYTE	RL (µg/L)	MCL/AL (µg/L)	Yes.	Continue sampling.
	Barium	5	2,000	Chromium		
	Copper	10	1,300	Zinc	50	5,000
	Arsenic	30	10	Cadmium	7	5
		Lead	25	15		
		Mercury	1	2		
	Meet CSSA QAPP quality assurance requirements.	Samples were analyzed in accordance with the CSSA QAPP and approved variances. Parsons chemists verified all data.			Yes.	NA
		All data flagged with a “U,” “J,” “M,” and “F” are usable for characterizing contamination. All “R” flagged data are considered unusable.			Yes.	NA
	Meet CSSA QAPP quality assurance requirements. (Continued)	Previously, a method detection limit (MDL) study for arsenic, cadmium, and lead was not performed within a year of the analyses, as required by the AFCEE QAPP.			The laboratory performed new MDL studies in February 2001 for these metals and the new MDL values were found to be almost identical to the previous MDLs and all met the associated AFCEE QAPP requirements. MDLs for these three metals are well below MCLs. In addition, the laboratory performed daily calibrations and RL verifications for these metals, both of which demonstrate the laboratory’s ability to detect and quantitate these metals at RL levels. These daily analyses also indicate that concentrations above the laboratory RL for these compounds were not affected by the expired MDL study.	Use results for groundwater characterization purposes.

Activity	Objectives	Action	Objective Attained?	Recommendations
Remediation	Determine goals and create cost-effective and technologically appropriate methods for remediation (2.2.1).	Continued data collection will provide analytical results for accomplishing this objective.	Ongoing.	Continue sampling and evaluation, including quarterly groundwater monitoring teleconferences to address remediation.
	Determine placement of new wells for monitoring (2.3.1, 3.6)	Sampling frequency and sample locations to be monitored (including any new wells) will be based on trend data from monitoring event(s) (3.1.5).	Ongoing.	Continue quarterly groundwater teleconferences to discuss sampling frequency and placement of new monitor wells.
Project schedule/ Reporting	Produce a quarterly monitoring project schedule as a road map for sampling, analysis, validation, verification, reviews, and reports.	Prepare schedules and sampling guidelines prior to each quarterly sampling event.	Yes.	Continue sampling schedule preparation each quarter.

APPENDIX B

**QUARTERLY ON-POST GROUNDWATER
MONITORING ANALYTICAL RESULTS
JUNE 2017**

Appendix B
Quarterly On-Post Groundwater Monitoring Analytical Results, June 2017

Well ID	Sample Date	Arsenic	Barium	Cadmium	Chromium	Copper	Lead	Zinc	Mercury
CSSA Drinking Water Well System									
CS-1	6/27/2017	0.00022U	0.0331	0.0005U	0.001U	0.014	0.0057F	0.175	0.0001U
CS-1 FD	6/27/2017	0.00101F	0.0357	0.0005U	0.001U	0.015	0.0043F	0.145	0.0001U
CS-10	6/27/2017	0.00121F	0.0376	0.0005U	0.0012F	0.003U	0.0027F	0.387	0.0001U
CS-12	6/27/2017	0.00125F	0.03	0.0005U	0.0746	0.003U	0.0031F	0.033F	0.0001U
CS-13	6/28/2017	0.00418F	0.0319	0.0005U	0.0016F	0.003U	0.0034F	0.435	0.0001U
Comparison Criteria									
Method Detection Limit (MDL)		0.00022	0.0003	0.0005	0.001	0.003	0.0019	0.008	0.0001
Reporting Limit (RL)		0.03	0.005	0.007	0.01	0.01	0.025	0.05	0.001
Max. Contaminant Level (MCL)		0.01	2	0.005	0.1	AL=1.3	AL=0.015	SS=5.0	0.002

Well ID	Sample Date	cis-1,2-DCE	PCE	TCE	Vinyl Chloride
CS-D	6/19/2017	4.47	5.32	6.56	0.08U
CS-MWG-LGR	6/26/2017	0.07U	0.06U	0.05U	0.08U
CS-MWH-LGR	6/20/2017	0.07U	0.06U	0.05U	0.08U
CS-I	6/20/2017	0.07U	0.06U	0.05U	0.08U
CS-2	6/16/2017	0.07U	0.06U	0.05U	0.08U
CS-4	6/16/2017	0.07U	0.61F	0.22F	0.08U
CS-4 FD	6/16/2017	0.07U	0.59F	0.25F	0.08U
CS-MW1-LGR	6/19/2017	20.49	13.98	24.73	0.08U
CS-MW1-CC	6/28/2017	0.07U	0.06U	0.05U	0.08U
CS-MW2-LGR	6/19/2017	0.36F	0.06U	0.05U	0.08U
CS-MW2-CC	6/28/2017	0.07U	0.06U	0.05U	0.08U
CS-MW3-LGR	6/19/2017	0.07U	0.06U	0.05U	0.08U
CS-MW4-LGR	6/28/2017	0.07U	0.06U	0.05U	0.08U
CS-MW5-LGR	6/16/2017	11.65	5.87	13.16	0.08U
CS-MW6-LGR	6/8/2017	0.07U	0.06U	0.05U	0.08U
CS-MW6-CC	6/8/2017	0.07U	0.06U	0.05U	0.08U
CS-MW7-LGR	6/20/2017	0.07U	0.88F	0.05U	0.08U
CS-MW7-CC	6/26/2017	0.07U	0.06U	0.05U	0.08U
CS-MW7-CC FD	6/26/2017	0.07U	0.06U	0.05U	0.08U
CS-MW8-LGR	6/8/2017	0.07U	2.62	0.05U	0.08U
CS-MW8-CC	6/8/2017	0.07U	0.06U	0.05U	0.08U
CS-MW9-LGR	6/19/2017	0.07U	0.06U	0.05U	0.08U
CS-MW9-LGR FD	6/19/2017	0.07U	0.06U	0.05U	0.08U
CS-MW9-CC	6/19/2017	0.07U	0.06U	0.05U	0.08U
CS-MW10-LGR	6/26/2017	0.07U	1.89	0.05U	0.08U
CS-MW10-CC	6/26/2017	0.07U	0.06U	0.05U	0.08U
CS-MW11A-LGR	6/26/2017	0.07U	0.89F	0.05U	0.08U
CS-MW11B-LGR	6/26/2017	0.07U	0.98F	0.05U	0.08U
CS-MW12-LGR	6/16/2017	0.07U	0.06U	0.05U	0.08U
CS-MW12-CC	6/16/2017	0.07U	0.06U	0.05U	0.08U
CS-MW17-LGR	6/28/2017	0.07U	0.67F	0.05U	0.08U
CS-MW17-LGR FD	6/28/2017	0.07U	0.76F	0.05U	0.08U
CS-MW18-LGR	6/16/2017	0.07U	0.06U	0.05U	0.08U
CS-MW19-LGR	6/16/2017	0.07U	0.68F	0.05U	0.08U
CS-MW20-LGR	6/26/2017	0.07U	1.23F	0.05U	0.08U
CS-MW21-LGR	6/28/2017	0.07U	0.06U	0.05U	0.08U
CS-MW22-LGR	6/26/2017	0.07U	0.06U	0.05U	0.08U
CS-MW23-LGR	6/26/2017	0.07U	0.06U	0.05U	0.08U
CS-MW24-LGR	6/19/2017	0.07U	0.06U	0.05U	0.08U
CS-MW25-LGR	6/27/2017	0.07U	0.06U	0.05U	0.08U
CS-MW35-LGR	6/26/2017	0.07U	0.66F	0.05U	0.08U
CS-MW36-LGR	6/8/2017	0.07U	5.43	4.2	0.08U

Appendix B
Quarterly On-Post Groundwater Monitoring Analytical Results, June 2017

CSSA Drinking Water Well System					
CS-1	6/27/2017	0.07U	0.06U	0.16F	0.08U
CS-1 FD	6/27/2017	0.07U	0.06U	0.19F	0.08U
CS-10	6/27/2017	0.07U	0.06U	0.05U	0.08U
CS-12	6/27/2017	0.07U	0.06U	0.05U	0.08U
CS-13	6/28/2017	0.07U	0.06U	0.05U	0.08U
Comparison Criteria					
Method Detection Limit (MDL)	0.07	0.06	0.05	0.08	
Reporting Limit (RL)	1.2	1.4	1	1.1	
Max. Contaminant Level (MCL)	70	5	5	2	

BOLD	= Above the MDL
BOLD	= Above the RL
BOLD	= Above the MCL

Precipitation per Quarter:	Mar-17	Jun-17
AOC-65 Weather Station (AOC-65 WS)	NA	5.31
B-3 Weather Station (B-3 WS)	7.61	6.86

All samples were analyzed by APPL, Inc.
 VOC data reported in ug/L & metals data reported in mg/L.

Abbreviations/Notes:

FD Field Duplicate
 TCE Trichloroethene
 PCE Tetrachloroethene
 DCE Dichloroethene
 AL Action Level
 SS Secondary Standard

Data Qualifiers:

U-The analyte was analyzed for, but not detected. The associated numerical value is at or below the MDL.
 F-The analyte was positively identified but the associated numerical value is below the RL.
 NA - data not available

APPENDIX B
QUARTERLY ON-POST GROUNDWATER
MONITORING ANALYTICAL RESULTS
JUNE 2017

Well ID:	CS-MW37-LGR			
Sample Date:	7/12/2017			
Analyte	MDL	RL	MCL	Concentration
Organics (µg/L)				
1,1,1,2-TETRACHLOROETHANE	0.09	0.5	NA	0.09U
1,1,1-TCA	0.03	0.8	200	0.03U
1,1,2,2-TETRACHLOROETHANE	0.07	0.4	NA	0.07U
1,1,2-TCA	0.06	1	5	0.06U
1,1-DCA	0.07	0.4	NA	0.07U
1,1-DCE	0.12	1.2	7	0.12U
1,1-DICHLOROPROPENE	0.1	1	NA	0.1U
1,2,3-TRICHLOROBENZENE	0.24	0.3	NA	0.24U
1,2,3-TRICHLOROPROPANE	0.17	3.2	NA	0.17U
1,2,4-TRICHLOROBENZENE	0.16	0.4	70	0.16U
1,2,4-TRIMETHYLBENZENE	0.04	1.3	NA	0.04U
1,2-DCA	0.05	0.6	5	0.05U
1,2-DCB	0.02	0.3	NA	0.02U
1,2-DIBROMO-3-CHLOROPROPANE	0.76	2.6	0.2	0.76U
1,2-DICHLOROPROPANE	0.06	0.4	5	0.06U
1,2-EDB	0.06	0.6	NA	0.06U
1,3,5-TRIMETHYLBENZENE	0.04	0.5	NA	0.04U
1,3-DCB	0.03	1.2	NA	0.03U
1,3-DICHLOROPROPANE	0.05	0.4	NA	0.05U
1,4-DCB	0.07	0.3	NA	0.07U
1-CHLOROHEXANE	0.04	0.5	NA	0.04U
2,2-DICHLOROPROPANE	0.1	3.5	NA	0.1U
2-CHLOROTOLUENE	0.04	0.4	NA	0.04U
4-CHLOROTOLUENE	0.04	0.6	NA	0.04U
BENZENE	0.07	0.4	NA	0.07U
BROMOBENZENE	0.06	0.3	NA	0.06U
BROMOCHLOROMETHANE	0.11	0.4	NA	0.11U
BROMODICHLOROMETHANE	0.06	0.8	*80	0.06U
BROMOFORM	0.13	1.2	*80	0.13U
BROMOMETHANE	0.08	1.1	NA	0.08U
CARBON TETRACHLORIDE	0.06	2.1	5	0.06U
CHLOROBENZENE	0.04	0.4	0.1	0.04U
CHLOROETHANE	0.07	1	NA	0.07U
CHLOROFORM	0.06	0.3	*80	0.06U
CHLOROMETHANE	0.16	1.3	NA	0.16U
CIS-1,2-DCE	0.07	1.2	70	0.07U
CIS-1,3-DICHLOROPROPENE	0.03	1	NA	0.03U
DIBROMOCHLOROMETHANE	0.06	0.5	*80	0.06U
DIBROMOMETHANE	0.06	2.4	NA	0.06U
DICHLORODIFLUOROMETHANE	0.11	1	NA	0.11U
ETHYLBENZENE	0.05	0.6	700	0.05U
HEXACHLOROBUTADIENE	0.17	1.1	NA	0.17U
ISOPROPYLBENZENE	0.04	0.5	NA	0.04U
M&P-XYLENE	0.07	0.5	NA	0.07U
METHYLENE CHLORIDE	0.35	1	NA	0.35U

APPENDIX B
QUARTERLY ON-POST GROUNDWATER
MONITORING ANALYTICAL RESULTS
JUNE 2017

Well ID:	CS-MW37-LGR			
Sample Date:	7/12/2017			
Analyte	MDL	RL	MCL	Concentration
N-BUTYLBENZENE	0.17	1.1	NA	0.17U
N-PROPYLBENZENE	0.03	0.4	NA	0.03U
NAPHTHALENE	0.07	0.4	NA	0.07U
O-XYLENE	0.06	1.1	NA	0.06U
P-ISOPROPYLTOLUENE	0.05	1.2	NA	0.05U
SEC-BUTYLBENZENE	0.05	1.3	NA	0.05U
STYRENE	0.08	0.4	100	0.08U
TCE	0.05	1	5	0.05U
TERT-BUTYLBENZENE	0.04	1.4	NA	0.04U
TETRACHLOROETHENE	0.06	1.4	5	0.06U
TOLUENE	0.06	1.1	1000	0.06U
TRANS-1,2-DCE	0.08	0.6	100	0.08U
TRANS-1,3-DICHLOROPROPENE	0.04	1	NA	0.04U
TRICHLOROFLUOROMETHANE	0.07	0.8	NA	0.07U
VINYL CHLORIDE	0.08	1.1	2	0.08U
Metals (mg/L)				
ARSENIC	0.00022	0.03	0.01	0.00076F
BARIUM	0.0003	0.005	2	0.0442
CADMIUM	0.0005	0.007	0.005	0.0005U
CHROMIUM	0.001	0.01	0.1	0.0076F
COPPER	0.003	0.01	AL = 1.3	0.003U
LEAD	0.0019	0.025	AL = 0.015	0.0019U
ZINC	0.008	0.05	SS = 5	0.588
MERCURY	0.0001	0.001	0.002	0.0001U
Inorganics (mg/L)				
TOTAL DISSOLVED SOILIDS	4.4	10	SS = 500	321
BROMIDE	0.07	0.5	NA	0.2F
CHLORIDE	0.08	1	SS = 250	11.96
FLUORIDE	0.1	0.1	4	0.42
NITRATE	0.03	0.5	10	4.6
NITRITE	0.04	0.3	1	0.12F
SULFATE	0.26	1	SS = 250	20.74
BICARBONATE AS CaCO3	0.3	2	NA	264

BOLD	= Above the MDL
BOLD	= Above the RL
BOLD	= Above the MCL

Data Qualifiers:

U-The analyte was analyzed for, but not detected. The associated numerical value is at or below
 F-The analyte was positively identified but the associated numerical value is below the RL.

Abbreviations/Notes:

* Total Trihalomethanes (TTHMs) - maximum allowable annual average level
 NA = no applicable standard
 SS = secondary standard
 AL = action level

APPENDIX B
QUARTERLY ON-POST GROUNDWATER
MONITORING ANALYTICAL RESULTS
JUNE 2017

Well ID:	CS-MW37-LGR			
Sample Date:	7/12/2017			
Analyte	MDL	RL	MCL	Concentration
MDL = method detection limit RL = reporting limit MCL = maximum contaminant level				

APPENDIX C

WESTBAY ANALYTICAL RESULTS, JUNE 2017

Appendix C
Westbay Well Analytical Results, June 2017

Well ID	Date Sampled	cis-1,2-DCE (cis-1,2-dichloroethene)	TCE (trichloroethene)	PCE (tetrachloroethene)	Vinyl Chloride
CS-WB01-UGR-01	6/21/2017	Dry			
CS-WB01-LGR-01	6/21/2017	<0.07	0.43F	1.20F	<0.08
CS-WB01-LGR-02	6/21/2017	<0.07	2.34	11.08	<0.08
CS-WB01-LGR-03	6/21/2017	<0.07	10.45	4.02	<0.08
CS-WB01-LGR-04	6/21/2017	<0.07	<0.05	<0.06	<0.08
CS-WB01-LGR-05	6/21/2017	1.48	<0.05	<0.06	<0.08
CS-WB01-LGR-06	6/21/2017	1.60	4.37	<0.06	<0.08
CS-WB01-LGR-07	6/21/2017	<0.07	14.11	14.07	<0.08
CS-WB01-LGR-08	6/21/2017	19.78	1.23	<0.06	<0.08
CS-WB01-LGR-09	6/21/2017	0.49F	<0.05	<0.06	1.94
CS-WB02-UGR-01	6/22/2017	port clogged			
CS-WB02-LGR-01	6/22/2017	Dry			
CS-WB02-LGR-02	6/22/2017	Dry			
CS-WB02-LGR-03	6/22/2017	<0.07	0.47F	2.93	<0.08
CS-WB02-LGR-04	6/22/2017	<0.07	4.65	2.6	<0.08
CS-WB02-LGR-05	6/22/2017	0.61F	1.66	<0.06	<0.08
CS-WB02-LGR-06	6/22/2017	0.72F	2.33	4.24	<0.08
CS-WB02-LGR-07	6/22/2017	0.59F	1.14	<0.06	<0.08
CS-WB02-LGR-08	6/22/2017	3.08	<0.05	<0.06	<0.08
CS-WB02-LGR-09	6/22/2017	<0.07	6.82	7.14	<0.08
CS-WB03-UGR-01	6/22/2017	9.56	103.64**	9356.24***	<0.08
CS-WB03-LGR-01	6/22/2017	0.54F	16.79	365.80*	<0.08
CS-WB03-LGR-02	6/22/2017	Dry			
CS-WB03-LGR-03	6/22/2017	<0.07	0.52F	3.79	<0.08
CS-WB03-LGR-04	6/22/2017	<0.07	4.9	15.87	<0.08
CS-WB03-LGR-05	6/22/2017	<0.07	2.18	13.38	<0.08
CS-WB03-LGR-06	6/22/2017	7.01	<0.05	<0.06	<0.08
CS-WB03-LGR-07	6/22/2017	2.38	5.89	2.31	<0.08
CS-WB03-LGR-08	6/22/2017	2.00	<0.05	<0.06	0.90F
CS-WB03-LGR-09	6/22/2017	<0.07	2.29	2.57	<0.08
CS-WB04-UGR-01	7/10/2017	Dry			
CS-WB04-LGR-01	7/10/2017	<0.07	<0.05	0.68F	<0.08
CS-WB04-LGR-02	7/10/2017	Dry			
CS-WB04-LGR-03	7/10/2017	<0.07	<0.05	<0.06	<0.08
CS-WB04-LGR-04	7/10/2017	0.31F	<0.05	<0.06	<0.08
CS-WB04-LGR-06	7/10/2017	3.74	12.69	16.87	<0.08
CS-WB04-LGR-07	7/10/2017	32.58	4.71	<0.06	<0.08
CS-WB04-LGR-08	7/10/2017	0.53F	1.05	0.74F	<0.08
CS-WB04-LGR-09	7/10/2017	<0.07	6.93	8.75	<0.08
CS-WB04-LGR-10	7/10/2017	<0.07	0.46F	2.02	<0.08
CS-WB04-LGR-11	7/10/2017	<0.07	<0.05	0.45F	<0.08
CS-WB04-BS-01	7/10/2017	<0.07	<0.05	<0.06	<0.08
CS-WB04-BS-02	7/10/2017	<0.07	<0.05	<0.06	<0.08
CS-WB04-CC-01	7/10/2017	1.15F	<0.05	<0.06	<0.08
CS-WB04-CC-02	7/10/2017	<0.07	<0.05	0.24F	<0.08
CS-WB04-CC-03	7/10/2017	<0.07	<0.05	0.44F	<0.08
Comparison Criteria					
Method Detection Limit	MDL	0.07	0.05	0.06	0.08
Reporting Limit	RL	1.2	1	1.4	1.1
Max. Contaminant Level	MCL	70	5	5	2

Data Qualifiers

Appendix C
Westbay Well Analytical Results, June 2017

'--' indicates the result was non-detect.
F-The analyte was positively identified but the associated numerical value is below the RL.
* dilution of 5 run for this sample.
** dilution of 50 run for this sample.
*** dilution of 200 run for this sample
All values are reported in µg/L.

BOLD	≥ MDL
BOLD	≥ RL
BOLD	≥ MCL

**APPENDIX D
DATA VALIDATION REPORT**

**SDG 83063
SDG 83129
SDG 83163
SDG 83208
SDG 83302**

DATA VERIFICATION SUMMARY REPORT
For on-post and off-post samples collected from
CAMP STANLEY STORAGE ACTIVITY

BOERNE, TEXAS

Data Verification by: Tammy Chang
Parsons - Austin

INTRODUCTION

The following data verification summary report covers thirteen groundwater samples and the associated field quality control (QC) samples collected from on- and off-post Camp Stanley Storage Activity (CSSA) on June 7 and 8, 2017. The samples were assigned to the following Sample Delivery Group (SDG). All samples were analyzed for volatile organic compounds (VOCs).

83063

The field QC samples associated with this SDG were one trip blank (TB) sample and one field duplicate (FD) sample. No ambient blanks were collected. During the initiation of this project, it was determined that ambient blanks were not necessary due to the absence of a source at these sites.

All samples were collected by Parsons and analyzed by APPL, Inc. following the procedures outlined in the Statement of Work and CSSA QAPP, Version 1.0. Samples in this SDG were shipped to the laboratory in one cooler which was received by the laboratory at a temperature of 3.0°C, which was within the 2-6°C range recommended by the CSSA QAPP.

EVALUATION CRITERIA

The data submitted by the laboratory has been reviewed and verified following the guidelines outlined in the CSSA QAPP, Version 1.0. Information reviewed in the data package included sample results; field and laboratory quality control samples; calibrations; case narratives; raw data; chain-of-custody (COC) forms and the sample receipt checklist. The findings presented in this report are based on the reviewed information, and whether the guidelines in the CSSA QAPP, Version 1.0, were met.

VOLATILES

General

The volatiles portion of this data package consisted of eight (8) off-post, five (5) on-post groundwater samples, one FD, and one (1) TB. All samples were collected on June 7 and 8, 2017 and analyzed for a reduced list of VOCs which included: *cis*-1,2-dichloroethene, tetrachloroethene, trichloroethene, and vinyl chloride.

The VOC analyses were performed using United States Environmental Protection Agency (USEPA) SW846 Method 8260B. The samples were analyzed in four analytical batches, #219546, #219737, #219758, and #219807 under one initial calibration (ICAL). All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery (%R) obtained from the four laboratory control spike (LCS) samples and the surrogate spikes.

All LCSs and surrogate spike recoveries were within acceptance criteria.

Precision

Precision was evaluated based on the relative percent difference (%RPD) of parent and FD sample results. Well I10-10 was collected in duplicate. None of the target analytes were detected at or above the reporting limits, therefore, the %RPD calculation could not be performed.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining TB and laboratory blank for cross contamination of samples during sample collection/shipment and analysis.

All samples in this data package were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. All samples were prepared and analyzed within the holding time required by the method.

- All instrument performance check criteria were met.
- All initial calibration criteria were met.

- All initial calibration verification (ICV) criteria were met. The ICV was prepared using a secondary source standard. All second source verification criteria were met.
- All continuing calibration verification (CCV) criteria were met.
- All internal standard criteria were met.

There were four method blanks and one TB associated with the VOC analyses in this SDG and all were non-detect for all target VOCs.

Completeness

Completeness has been evaluated in accordance with the CSSA QAPP. The number of usable results has been divided by the number of possible individual analyte results and expressed as a percentage to determine the completeness of the data set.

All VOC results for the samples in this SDG were considered usable. The completeness for this SDG is 100%, which meets the minimum acceptance criteria of 95%.

DATA VERIFICATION SUMMARY REPORT
for on-post samples collected from
CAMP STANLEY STORAGE ACTIVITY

BOERNE, TEXAS

Data Verification by: Tammy Chang
Parsons - Austin

INTRODUCTION

The following data verification summary report covers fourteen groundwater samples and the associated field quality control (QC) samples collected from on-post Camp Stanley Storage Activity (CSSA) on June 16 and 19, 2017. The samples were assigned to the following Sample Delivery Group (SDG). All samples were analyzed for volatile organic compounds (VOCs).

83129

The field QC samples associated with this SDG were two field duplicates (FD), one set of matrix spike/matrix spike duplicate (MS/MSD), and one trip blank (TB) samples. No ambient blanks were collected. During the initiation of this project, it was determined that ambient blanks were not necessary due to the absence of a source at these sites.

All samples were collected by Parsons and analyzed by APPL, Inc. following the procedures outlined in the Statement of Work and CSSA QAPP, Version 1.0. Samples in this SDG were shipped to the laboratory in one cooler which was received by the laboratory at a temperature of 3.0°C, which was within the 2-6°C range recommended by the CSSA QAPP.

EVALUATION CRITERIA

The data submitted by the laboratory has been reviewed and verified following the guidelines outlined in the CSSA QAPP, Version 1.0. Information reviewed in the data package included sample results; field and laboratory quality control samples; calibrations; case narratives; raw data; chain-of-custody (COC) forms and the sample receipt checklist. The findings presented in this report are based on the reviewed information, and whether the guidelines in the CSSA QAPP, Version 1.0, were met.

VOLATILES

General

The volatiles portion of this data package consisted of fourteen (14) on-post groundwater samples, two FDs, one set of MS/MSD, and one (1) TB. Samples were collected on June 16 and 19, 2017 and analyzed for a reduced list of VOCs which included: *cis*-1,2-dichloroethene, tetrachloroethene, trichloroethene, and vinyl chloride.

The VOC analyses were performed using United States Environmental Protection Agency (USEPA) SW846 Method 8260B. The samples were analyzed in two analytical batches, #220021 and #220032 under two sets of initial calibration (ICAL) with two instrument. All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery (%R) obtained from the laboratory control spike (LCS) sample, MS/MSD analyses, and the surrogate spikes. Sample CS-MW3-LGR was designated as the parent sample for the MS/MSD analyses.

All LCS, MS, MSD, and surrogate spike recoveries were within acceptance criteria.

Precision

Precision was evaluated using the relative percent difference (%RPD) of the MS/MSD results and parent/FD results. Samples CS-MW3-LGR and CS-4 were collected in duplicate.

None of the four target VOCs were detected in the two sets of parent and FD samples at or above the reporting limits, therefore, the %RPD calculations were not applicable.

All %RPDs of MS and MSD were compliant.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining trip blank and laboratory blank for cross contamination of samples during sample collection and analysis.

All samples in this data package were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. All samples were prepared and analyzed within the holding time required by the method.

- All instrument performance check criteria were met for both instrument.

- All initial calibration criteria were met for both set of curves.
- All initial calibration verification (ICV) criteria were met. The two ICVs were prepared using secondary source standards. All second source verification criteria were met.
- All continuing calibration verification (CCV) criteria were met.
- All internal standard criteria were met.

There were two method blanks and one TB associated with the VOC analyses in this SDG and all were non-detect for all target VOCs.

Completeness

Completeness has been evaluated in accordance with the CSSA QAPP. The number of usable results has been divided by the number of possible individual analyte results and expressed as a percentage to determine the completeness of the data set.

All VOC results for the samples in this SDG were considered usable. The completeness for this SDG is 100%, which meets the minimum acceptance criteria of 95%.

DATA VERIFICATION SUMMARY REPORT
for on-post samples collected from
CAMP STANLEY STORAGE ACTIVITY

BOERNE, TEXAS

Data Verification by: Tammy Chang
Parsons - Austin

INTRODUCTION

The following data verification summary report covers twenty-four groundwater samples and the associated field quality control (QC) samples collected from on-post Camp Stanley Storage Activity (CSSA) on June 20, 21, and 22, 2017. The samples were assigned to the following Sample Delivery Group (SDG). All samples were analyzed for volatile organic compounds (VOCs).

83163

The field QC samples associated with this SDG were one set of matrix spike/matrix spike duplicate (MS/MSD) and one trip blank (TB). No ambient blanks were collected. During the initiation of this project, it was determined that ambient blanks were not necessary due to the absence of a source at these sites.

All samples were collected by Parsons and analyzed by APPL, Inc. following the procedures outlined in the Statement of Work and CSSA QAPP, Version 1.0. Samples in this SDG were shipped to the laboratory in one cooler which was received by the laboratory at a temperature of 3.0°C, which was within the 2-6°C range recommended by the CSSA QAPP.

EVALUATION CRITERIA

The data submitted by the laboratory has been reviewed and verified following the guidelines outlined in the CSSA QAPP, Version 1.0. Information reviewed in the data package included sample results; field and laboratory quality control samples; calibrations; case narratives; raw data; chain-of-custody (COC) forms and the sample receipt checklist. The findings presented in this report are based on the reviewed information, and whether the guidelines in the CSSA QAPP, Version 1.0, were met.

VOLATILES

General

The volatiles portion of this data package consisted of twenty-four (24) on-post groundwater samples, one set of MS/MSD, and one (1) TB. Samples were collected on June 20, 21, and 22, 2017 and analyzed for a reduced list of VOCs which included: *cis*-1,2-dichloroethene, tetrachloroethene, trichloroethene, and vinyl chloride.

The VOC analyses were performed using United States Environmental Protection Agency (USEPA) SW846 Method 8260B. The samples were analyzed in two analytical batches, #220267 and #220266 under one set of initial calibration (ICAL). All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery (%R) obtained from the two laboratory control spike (LCS) samples, MS/MSD analyses, and the surrogate spikes. Sample CS-MW7-LGR was designated as the parent sample for the MS/MSD analyses.

All LCSs, MS, MSD, and surrogate spike recoveries were within acceptance criteria.

Precision

Precision was evaluated using the relative percent difference (%RPD) of the MS/MSD results.

All %RPDs of MS and MSD were compliant.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining trip blank and laboratory blank for cross contamination of samples during sample collection and analysis.

All samples in this data package were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. All samples were prepared and analyzed within the holding time required by the method.

- All instrument performance check criteria were met.
- All initial calibration criteria were met.

- All initial calibration verification (ICV) criteria were met. The ICV was prepared using secondary source standards. All second source verification criteria were met.
- All continuing calibration verification (CCV) criteria were met.
- All internal standard criteria were met.

There were two method blanks and one TB associated with the VOC analyses in this SDG and all were non-detect for all target VOCs.

Completeness

Completeness has been evaluated in accordance with the CSSA QAPP. The number of usable results has been divided by the number of possible individual analyte results and expressed as a percentage to determine the completeness of the data set.

All VOC results for the samples in this SDG were considered usable. The completeness for this SDG is 100%, which meets the minimum acceptance criteria of 95%.

DATA VERIFICATION SUMMARY REPORT
For on-post and off-post samples collected from
CAMP STANLEY STORAGE ACTIVITY

BOERNE, TEXAS

Data Verification by: Tammy Chang
Parsons - Austin

INTRODUCTION

The following data verification summary report covers fifteen groundwater samples and the associated field quality control (QC) samples collected from on- and off-post Camp Stanley Storage Activity (CSSA) on June 26 and 27, 2017. The samples were assigned to the following Sample Delivery Group (SDG). All samples were analyzed for volatile organic compounds (VOCs) and drinking water wells were also analyzed for the following metals: arsenic, barium, cadmium, chromium, lead, zinc, and mercury.

83208

The field QC samples associated with this SDG were one trip blank (TB), one field duplicate (FD), and one set of matrix spike/matrix spike duplicate (MS/MSD) samples. No ambient blanks were collected. During the initiation of this project, it was determined that ambient blanks were not necessary due to the absence of a source at these sites.

All samples were collected by Parsons and analyzed by APPL, Inc. following the procedures outlined in the Statement of Work and CSSA QAPP, Version 1.0. Samples in this SDG were shipped to the laboratory in one cooler which was received by the laboratory at a temperature of 3.1°C, which was within the 2-6°C range recommended by the CSSA QAPP.

EVALUATION CRITERIA

The data submitted by the laboratory has been reviewed and verified following the guidelines outlined in the CSSA QAPP, Version 1.0. Information reviewed in the data package included sample results; field and laboratory quality control samples; calibrations; case narratives; raw data; chain-of-custody (COC) forms and the sample receipt checklist. The findings presented in this report are based on the reviewed information, and whether the guidelines in the CSSA QAPP, Version 1.0, were met.

VOLATILES

General

The volatiles portion of this data package consisted of one (1) off-post groundwater sample, fourteen (14) on-post groundwater samples, two FDs, one set of MS/MSD, and one (1) TB. All samples were collected on June 26 and 27, 2017 and analyzed for a reduced list of VOCs which included: *cis*-1,2-dichloroethene, tetrachloroethene, trichloroethene, and vinyl chloride.

The VOC analyses were performed using United States Environmental Protection Agency (USEPA) SW846 Method 8260B. The samples were analyzed in two analytical batches, #220266 and #220311, under one initial calibration (ICAL). All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery (%R) obtained from the two laboratory control spike (LCS) samples, MS/MSD analyses, and the surrogate spikes. Sample CS-12 was designated as the parent sample for the MS/MSD analyses on the chain-of-custody.

All LCSs, MS/MSD, and surrogate spike recoveries were within acceptance criteria.

Precision

Precision was evaluated based on the relative percent difference (%RPD) of MS/MSD results and parent/FD sample results. Wells CS-MW7-CC and CS-1 were collected in duplicate.

None of the target analytes were detected at or above the reporting limits in both set of parent/FD samples, therefore, the relative percent difference calculation could not be performed.

All %RPDs of the MS/MSD results were compliant.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining laboratory blanks and trip blank for cross contamination of samples during analysis and collection/shipment.

All samples in this data package were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. All samples were prepared and analyzed within the holding time required by the method.

- All instrument performance check criteria were met.
- All initial calibration criteria were met.
- All initial calibration verification (ICV) criteria were met. The ICV was prepared using a secondary source standard. All second source verification criteria were met.
- All continuing calibration verification (CCV) criteria were met.
- All internal standard criteria were met.

There were two method blanks and one TB associated with the VOC analyses in this SDG and all were non-detect for all target VOCs.

Completeness

Completeness has been evaluated in accordance with the CSSA QAPP. The number of usable results has been divided by the number of possible individual analyte results and expressed as a percentage to determine the completeness of the data set.

All VOC results for the samples in this SDG were considered usable. The completeness for this SDG is 100%, which meets the minimum acceptance criteria of 95%.

ICP-AES METALS

General

The ICP-AES portion of this SDG consisted of three (3) on-post groundwater samples, one FD, and one set of MS/MSD. All samples were collected on June 27, 2017. All samples were analyzed for arsenic, barium, cadmium, chromium, copper, lead, and zinc.

The ICP-AES metals analyses were performed using USEPA SW846 Method 6010B. All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method.

The samples for ICP-AES metals were digested in batch #220627. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery obtained from the LCS, MS and MSD. CS-12 was designated as the parent sample for the MS/MSD analyses.

All LCS, MS, and MSD recoveries were within acceptance criteria.

Precision

Precision was measured based on the %RPD of MS/MSD results and parent/FD sample results. Sample CS-1 was collected in duplicate.

All %RPDs were compliant for the MS/MSD.

For the parent/FD samples, only barium, copper, and zinc were detected above the reporting limits. The %RPDs were compliant.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating preservation and holding times; and
- Examining laboratory blank for cross contamination of samples during analysis.

All samples were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0, prepared and analyzed within the holding time required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The ICV was prepared using a secondary source.
- All CCV criteria were met.
- All interference check (ICSA/ICSAB) criteria were met.
- No dilution test was required, as per the CSSA QAPP.

One method blank and several calibration blanks were analyzed in association with the ICP-AES analyses in this SDG. All blanks were free of target metals at or above the RL.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

All ICP-AES metals results for the samples in this SDG were considered usable. The completeness for the ICP metals portion of this SDG is 100%, which meets the minimum acceptance criteria of 95%.

MERCURY

General

The mercury portion of this SDG consisted of three (3) on-post groundwater samples, one FD, and one (1) set of MS/MSD. All samples were collected on June 27, 2017 and were analyzed for mercury.

The mercury analyses were performed using USEPA SW846 Method 7470A. These samples were analyzed following the procedures outlined in the CSSA QAPP, prepared and analyzed within the holding time required by the method.

The mercury samples were prepared in batch #220226. The analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the %R obtained from the LCS, MS, and MSD analyses. CS-12 was designated as the parent sample for the MS/MSD analyses.

The LCS, MS, and MSD recovery were within acceptance criteria.

Precision

Precision was measured based on the %RPD of MS/MSD results and parent/FD sample results. Sample CS-1 was collected in duplicate.

The %RPD of MS/MSD was compliant.

Mercury was not detected in the parent and FD sample.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining laboratory blanks for cross contamination of samples during analysis.

All samples were analyzed following the COC and the analytical procedures described in the CSSA QAPP, prepared and analyzed within the holding times required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The ICV was prepared using a secondary source.
- All calibration verification criteria were met.

There was one method blank and several calibration blanks associated with the mercury analyses in this SDG. All blanks were free of mercury at or above the RL.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

Mercury result for the sample in this SDG was considered usable. The completeness for the mercury portion of this SDG is 100%, which meets the minimum acceptance criteria of 90%.

DATA VERIFICATION SUMMARY REPORT
for CS-MW37-LGR (newly developed well) and JW-8 samples collected from
CAMP STANLEY STORAGE ACTIVITY

BOERNE, TEXAS

Data Verification by: Tammy Chang
Parsons - Austin

INTRODUCTION

The following data verification summary report covers two groundwater samples and one associated field quality control (QC) sample collected from CS-MW37-LGR (on-post newly developed well) and JW-8 (off-post existing well) at Camp Stanley Storage Activity (CSSA) on July 12, 2017. The samples in the following Sample Delivery Group (SDG) were analyzed for a full list of volatile organic compounds (VOCs) for the newly developed well and short list for JW-8, metals (including arsenic, barium, cadmium, chromium, copper, lead, zinc, and mercury), total dissolved solids (TDS), anions, and total alkalinity (including carbonate, bicarbonate, and total alkalinity):

83302

JW-8 was analyzed for VOC only. The field QC sample associated with this SDG was one trip blank (TB). TB was analyzed for VOC only. No ambient blanks were collected. During the initiation of this project, it was determined that ambient blanks were not necessary due to the absence of a source at these sites.

Both samples were collected by Parsons and analyzed by APPL, Inc. following the procedures outlined in the Statement of Work and CSSA QAPP, Version 1.0. The samples in this SDG were shipped to the laboratory in one cooler. The cooler was received by the laboratory at a temperature of 3.0°C, which was within the 2-6°C range recommended by the CSSA QAPP.

EVALUATION CRITERIA

The data submitted by the laboratory has been reviewed and verified following the guidelines outlined in the CSSA QAPP, Version 1.0. Information reviewed in the data packages included sample results; field and laboratory quality control samples; calibrations; case narratives; raw data; chain-of-custody (COC) forms and the sample receipt checklist. The findings presented in this report are based on the reviewed information, and whether the guidelines in the CSSA QAPP, Version 1.0, were met.

VOLATILES

General

The volatiles portion of this data package consisted of three (3) water samples, including JW-8, CS-MW37-LGR, and TB. The samples were collected on July 12, 2017, new well and TB were analyzed for full list of VOCs; JW-8 was analyzed for short list of VOCs.

The VOC analyses were performed using United States Environmental Protection Agency (USEPA) SW846 Method 8260B. The samples were analyzed in two analytical batches (#220690 for the JW-8 and #220840 for TB and CS-MW37-LGR) under two sets of initial calibration (ICALs), each ICAL was performed with its own instrument. All samples were analyzed following the procedures outlined in the CSSA QAPP and were prepared and analyzed within the holding time required by the method. All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery (%R) obtained from the two laboratory control samples (LCSs) and the surrogate spikes.

All LCSs and surrogate spike recoveries were within acceptance criteria.

Precision

Precision could not be evaluated due to the lack of duplicate analysis.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining trip and laboratory blanks for cross contamination of samples during transit or analysis.

All three samples in this data package were analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. All samples were prepared and analyzed within the holding time required by the method.

- All instrument performance check criteria were met for both instruments.
- All initial calibration criteria were met.
- Both LCSs were prepared using a secondary source. All second source verification criteria were met.
- All initial calibration verification (ICV) criteria were met.

- All continuing calibration verification (CCV) criteria were met.
- All internal standard criteria were met.

There were two method blanks and one TB associated with the VOC analyses in this SDG. All blanks were non-detect for all target VOCs at reporting limits. Parsons data validator also concluded that method blank had no target VOCs detected at or above the method detection limits.

Completeness

Completeness has been evaluated in accordance with the CSSA QAPP. The number of usable results has been divided by the number of possible individual analyte results and expressed as a percentage to determine the completeness of the data set.

All VOC results for the samples in this SDG were considered usable. The completeness for this SDG is 100%, which meets the minimum acceptance criteria of 95%.

ICP-AES METALS

General

The ICP-AES portion of this SDG consisted of one (1) groundwater sample which was collected on July 12, 2017 and as analyzed for aluminum, arsenic, barium, cadmium, calcium, chromium, copper, iron, lead, and zinc.

The ICP-AES metals analyses were performed using USEPA SW846 Method 6010B. This sample was analyzed following the procedures outlined in the CSSA QAPP and was prepared and analyzed within the holding time required by the method.

The sample for ICP-AES metals was digested in batch #220646 under a single ICAL. The sample analysis was performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery obtained from the LCS.

All LCS recoveries were within acceptance criteria.

Precision

Precision could not be evaluated due to the lack of duplicate analysis.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating preservation and holding times; and

- Examining laboratory blank for cross contamination of samples during analysis.

This sample was analyzed following the COC and the analytical procedures described in the CSSA QAPP, Version 1.0. This sample was prepared and analyzed within the holding time required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The ICV was prepared using a secondary source.
- All CCV criteria were met.
- All interference check (ICSA/ICSAB) criteria were met.
- No dilution test was required, as per the CSSA QAPP.

One method blank and several calibration blanks were analyzed in association with the ICP-AES analyses in this SDG. All blanks were free of target metals at or above the RL.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

All ICP-AES metals for the sample in this SDG were considered usable. The completeness for the ICP metals of this SDG is 100%, which meets the minimum acceptance criteria of 95%.

MERCURY

General

The mercury portion of this SDG consisted of one (1) groundwater sample which were collected on July 12, 2017 and were analyzed for mercury.

The mercury analyses were performed using USEPA SW846 Method 7470A. This sample was analyzed following the procedures outlined in the CSSA QAPP. This sample was prepared and analyzed within the holding time required by the method.

The mercury sample was prepared in batch #220686 under a single ICAL. The analysis was performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery obtained from the LCS.

The LCS recovery was within acceptance criteria.

Precision

Precision could not be evaluated due to the lack of duplicate analysis.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining laboratory blanks for cross contamination of samples during analysis.

The sample in this SDG was analyzed following the COC and the analytical procedures described in the CSSA QAPP. This sample was prepared and analyzed within the holding times required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The ICV was prepared using a secondary source.
- All calibration verification criteria were met.

There was one method blank and several calibration blanks associated with the mercury analyses in this SDG. All blanks were free of mercury at or above the RL.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

All mercury result for the sample in this SDG was considered usable. The completeness for the mercury portion of this SDG is 100%, which meets the minimum acceptance criteria of 90%.

WET CHEMISTRY

General

The wet chemistry portion of this SDG consisted of one (1) groundwater sample which were collected on July 12, 2017 and was analyzed for TDS, anions (including bromide, chloride, fluoride, nitrate, nitrite, and sulfate, and total alkalinity including carbonate and bicarbonate).

The TDS analysis was performed using EPA Method 160.1, anion analysis was performed according to USEPA Method 9056, and total alkalinity analysis was performed according to SM 2320B. The sample in this SDG was analyzed following the procedures outlined in the CSSA QAPP or methods listed above. This sample was prepared and analyzed within the holding time required by the method.

All analyses were performed undiluted.

Accuracy

Accuracy was evaluated using the percent recovery obtained from the LCSs.

All LCS recoveries were within acceptance criteria.

Precision

Precision could not be evaluated due to the lack of duplicate analysis.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents actual site conditions. Representativeness has been evaluated by:

- Comparing the COC procedures to those described in the CSSA QAPP;
- Comparing actual analytical procedures to those described in the CSSA QAPP;
- Evaluating holding times; and
- Examining laboratory blanks for cross contamination of samples during analysis.

The sample in this SDG was analyzed following the COC and the analytical procedures described in the CSSA QAPP. This sample was prepared and analyzed within the holding times required by the method.

- All initial calibration criteria were met.
- All second source verification criteria were met. The applicable ICV was prepared using a secondary source.
- All calibration verification criteria were met.

There was one method blank and several calibration blanks associated with each of the analyses in this SDG. All blanks were free of target analytes at or above the RL.

Completeness

Completeness has been evaluated by comparing the total number of samples collected with the total number of samples with valid analytical data.

All wet chemistry results for the sample in this SDG were considered usable. The completeness for the wet chemistry portion of this SDG is 100%, which meets the minimum acceptance criteria of 90%.